



**Ear Beans
Bluetooth® Headset
User Manual**

1. Notice Before Using

Thank you for purchasing the Bluetooth® Ear Beans POW-AU001. Please read this User's Manual completely before you use your Ear Beans.

Your Ear Beans are designed for listening to music wirelessly with high quality sound delivered through the latest in Bluetooth® wireless technology. With built-in MP3, AAC and apt-X low latency codec for high quality audio streaming. Ear Beans can be easily connected to a mobile phone for call conversation and music listening, they are also capable of connecting to the other Bluetooth®-enabled devices including android tablets/iPads and MP3/iPods.

POW-AU001 Ear Beans are compliant with Bluetooth V3.0 specification, supports HSP, HFP, A2DP and AVRCP profiles. Please make sure your phone or other device supports these profiles.

2. Specifications

Bluetooth specification: V3.0

Operation frequency: 2.402-2.48GHz

Supported profile: HSP, HFP, A2DP,AVRCP

Operation range: Up to 10 meters

Talk time: 5 hours

Play time: 4 hours

Standby time: 240hours

Battery type: 120mAh, 3.7V, Polymer Li-ion Battery


Charge time: 2 Hours

3. Package Contents List

Please inspect this package and refer to the package contents list below to verify all items were included:

- 1) POW-AU001 Bluetooth® Ear Beans (1)
- 2) USB Charging Cable(1)
- 3) User's Manual(1)

4. POW-AU001 Bluetooth® Ear Beans Overview

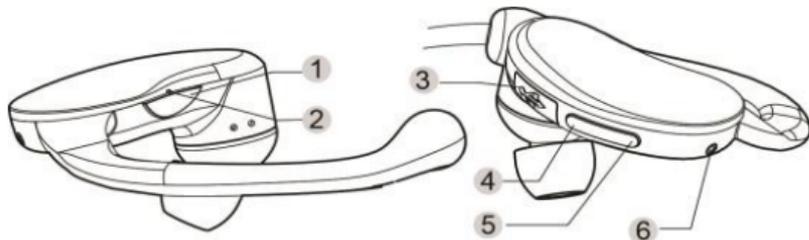

- ① Answer
- ② Indicator LED
- ③ Charging Port
- ④ Next Track / Volume +
- ⑤ Previous Track / Volume -
- ⑥ Microphone

5. Battery information

The Ear Beans are equipped with an integrated lithium-polymer battery. The battery cannot be replaced. Do not attempt to remove the battery from the device as this will damage the device. The full performance of a new battery is not achieved until after two or three complete charging-discharging cycles. The battery can be charged and discharged several hundred times, but it will lose its capacity over time. Disconnect the POW-AU001 from the power supply as soon as the battery is fully charged, overcharging will reduce the service life of the battery. A charged battery will lose its capacity if it is not used on a regular basis.

Important:

To avoid a complete discharge of the battery, the Ear Beans should be charged at least once every 6 months.

6. Charging the battery

The Ear Beans are operated with a rechargeable battery. Charge the battery completely before its first use. Read the section "Battery information" before starting the charging process.

- 1) Connect USB cable to a general USB power supplier.
- 2) Connect the charger cable to the charging port on your Ear Beans.
- 3) When the charger is connected to the Ear Beans, the red indicator light will turn on. Charging the battery fully may take up to 2 hours.
- 4) When the battery is fully charged, the red indicator light will turn blue. Disconnect the charger from the Ear Beans and the outlet. Your Ear Beans are ready to use.

NOTE:

- For first time use, please charge the headset fully.
- The fully charged battery has power for up to 5 hours of talk-time and 4 hours music playing time, and up to 240 hours of standby time. However, the talk and standby times may vary when used with different mobile phones or other compatible Bluetooth® devices, usage settings, usage styles, and environments. When the battery power is low, the headset will remind you by voice prompt "**Battery low**" every 20 seconds, and the red indicator light starts to flash.
- For using the POW-AU001 with iPhone, an additional battery meter feature will be activated and the remaining battery capacity will display on your phone.



7. Pair to your Bluetooth® phone

Before you use your Ear Beans the first time, you must pair them with a Bluetooth® enabled mobile phone. Pairing is a one-time process and is required only for the first connection. Please note that your **Ear Beans** can be connected with two mobile devices simultaneously.

- 1) Keep your Ear Beans within 1 meter range of a Bluetooth®-ready Mobile device.
- 2) Press and hold the **Play/Pause** button for about 4 seconds, the indicator light will flash red and blue intermittently, the device is now in pairing mode.
- 3) Find the Bluetooth® setting of your Mobile phone and start the search for Bluetooth® devices. For further details, please read the operating instructions of your Mobile phone.
- 4) From the list of devices found, select the **PWRPOD EAR BEANS**.
- 5) If required, enter the PIN code "0000" and confirm the entry. Once the pairing process was successful, Your Ear Beans will connect to your mobile device automatically then switch to standby mode, the indicator will flash blue every 5 seconds.

Note:

- 1) If pairing is not completed within 2 minutes, your Ear Beans will turn off. If this happens, please repeat the pairing steps.
- 2) Your Ear Beans support Multi-connection that allows for the simultaneous use of the Ear Beans with two mobile devices. After pairing successfully with two mobile phones, switch off the headset and switch on again, the headset will connect to both mobile phones automatically. Otherwise, you also can connect the Ear Beans to the mobile device manually as per the product manual of your mobile device.

8. Turning headset on and off

Turn on your headset

Slide the power switch to On to activate your Ear Beans. If your Ear Beans have completed the pairing process successfully, when the Ear Beans are turned on, they will automatically connect to the device you last connected to. Please ensure your Device's Bluetooth® function is active.

Turn off the headset

Slide the power switch to Off to turn off the Ear Beans.

Note:

To conserve power, if the Ear Beans are not connected to a device for approximately 10 minutes, the Ear Beans will turn off automatically.

9. Using for music play

Play / Pause

Press **Power / Play** button to make the music play or pause.

Next / Previous song

Push and hold toggle switch to track the song to next or previous.

Increase / Decrease volume

Push toggle switch to increase or decrease volume.

Note:

Your Ear Beans support the A2DP profile that allows stereo music streaming from a Bluetooth phone. The music will pause automatically when you begin either making or receiving a call, and resume when the call conversation has ended.

10. Using for phone calls

Last number re-dialing

At standby status, double press the **ANSWER** to re-dial the last number you dialed.

Note: the last number re-dialing is available only for the first device if two Mobile phones are connected. The connection sequence can be determined by reconnecting manually.

Answering a call

Press **ANSWER** quickly to answer an incoming call.

Reject an incoming call

Press and hold **ANSWER** for 2 seconds to reject the incoming call.

Transferring a call

Press and hold **Volume (+)** for 2 seconds to transfer the call between the phone and headset.

Ending a call

Press **ANSWER** shortly to end a call.

Call-waiting

- 1) If there is an incoming call while a call is in progress, press **ANSWER** shortly to accept the waiting call and end current calling.
- 2) If there is an incoming call while a call is in progress, press and hold **ANSWER** for 2 seconds to accept the incoming call and place the current call on hold.

Note: The same operation could be performed in case of Multi-connection.

Volume adjusting

Push toggle switch to increase or decrease volume.

Mute

While a call is in progress, push the toggle switch for 2 seconds to mute the headset. A reminder tone will sound every 10 seconds until you return to the call. Repeat the operation to un-mute.

11. Safety and general information

- 1) Please read this User's Manual carefully and follow all instructions.
- 2) To avoid any damage or malfunction of the device do not drop the device from high places.
- 3) Keep device away from humidity, water and any other liquid. If the device is exposed to water, moisture and other liquids do not operate it to avoid any electrical shock, explosion and damage to the device or yourself.
- 4) Do not place or keep this device near any heat sources, such as, direct sunlight, radiators, stoves or other apparatus that produce heat. This may cause an explosion, degrade the performance and/or reduce battery life.
- 5) Do not modify, repair or disassemble device (Especially the battery). Doing this will void the warranty.
- 6) Do not place heavy objects on the device.
- 7) Use only the supplied and approved chargers.

- 8) Unplug this device when unused for long periods of time and during lightning storms.
- 9) The battery used in this device may present a risk of fire or chemical burn if mistreated.

12. FCC & IC Statement

Operation is subject to the following two conditions:

- 1) This device may not cause harmful interference.
- 2) This device must accept any interference received, including interference that may cause undesired operation.

Note: The manufacturer is not responsible for ANY interference, for example RADIO or TV interference, caused by unauthorized modifications to this equipment. Such modifications could void the user's authority to operate the equipment.

13. EC Declaration of Conformity

Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference.
- (2) This device must accept any interference received, including interference that may cause undesired operation.

Note: The manufacturer is not responsible for ANY interference, for example RADIO or TV interference, caused by unauthorized modifications to this equipment.

Such modifications could void the user's authority to operate the equipment. This product is CE certified according to the provision of the R&TTE Directive (99/5/EC). This declares that this product is in compliance with the essential requirements and other relevant provisions of Directive 1999/5/EC. Please note that this product uses radio frequency bands not harmonized within EU.

Within the EU this product is intended to be used in Austria, Belgium, Denmark, Finland, France, Germany, Greece, Ireland, Italy, Luxembourg, The Netherlands, Portugal, Spain, Sweden, and United Kingdom and within EFTA in Iceland, Norway and Switzerland.

14. Warranty

The condition of this warranty and supplier's responsibilities under this warranty are as follows:

Warranty is non-transferable and is limited to the original purchaser only.

- You must be able to prove the date of original purchase of the unit with a dated receipt.
- The warranty is not applicable if the product has been subject to physical abuse, improper installation, modification or repair by an unauthorized third party.
- Supplier's responsibility shall be limited to the repair or replacement of the product at its sole discretion.
- Specifically exempt from any warranty are limited-life consumable components subject to normal wear and tear such as batteries, decorates and other accessories.
- Supplier is not responsible, for failure resulting from accident, abuse, misuse, or any unauthorized repair, or modification.
- Modification and repair of the unit should be done by an authorized and qualified service center or returned to the manufacturer.
- This warranty gives you specific legal rights, and you may also have other rights, which vary under local laws.