



1

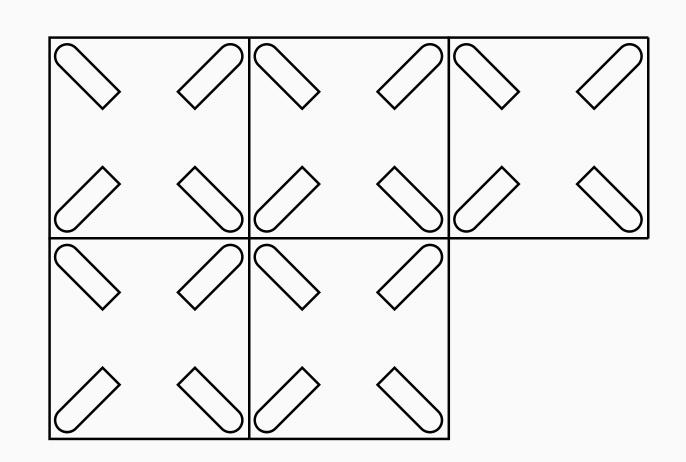

#### Plan ahead:

Place your Tiles face down on a tabletop in your desired arrangement.

Ensure a power supply is nearby.

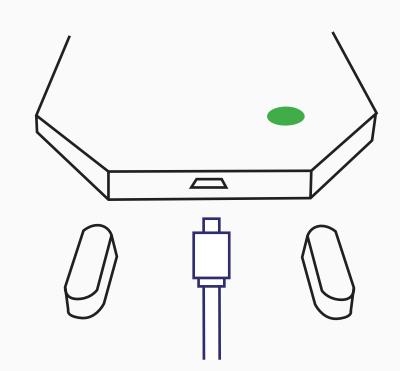

#### Plug them in:

Locate the starter
Tile by the green dot
located on the back.
Plug the Starter Tile
into the wall via the
long cable.

Connect all remaining Tiles securely via the short cables in the desired layout.



# Connect to App: Download and open the LIFX App.

From here you can click the +, select the starter Tile and onboard it. All remaining Tiles will onboard automatically.

#### Check powersupply:


All Tiles should light up either white or blue to indicate they are working.

If any Tile appears red, it is not receiving power. We have troubleshooting steps to help if this happens—

HELP MY TILES ARE RED!

# 3M Strip Placement:

Disconnect all cables, turn off the power supply and remove the sticker backs off the 3M strips on each Tile. Position a single tile on the clean wall — keep Tile cables disconnected throughout.

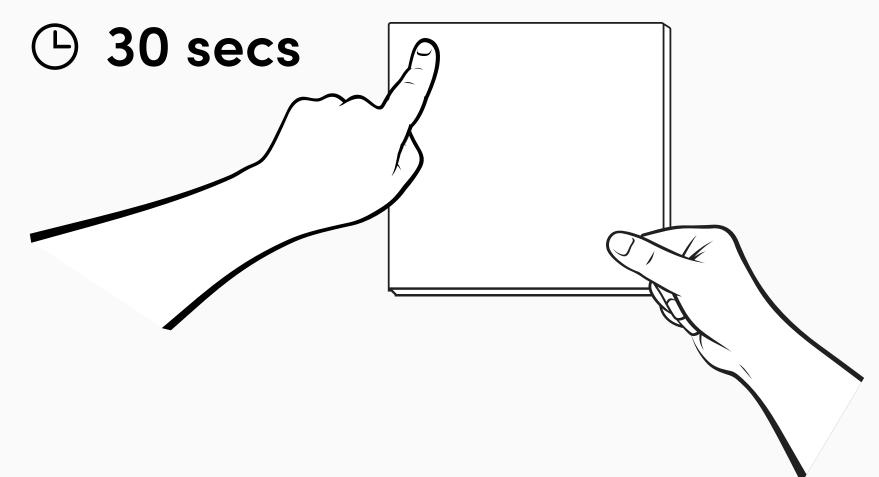


Press each corner of the Tile firmly onto the surface for 30 seconds (a second set of hands helps if you can get them!) Once stuck, figure out the position of the next one.

Remove each Tile as you go to allow the adhesive to set without weight (see next page for tips).


Repeat for all remaining Tiles.

### 

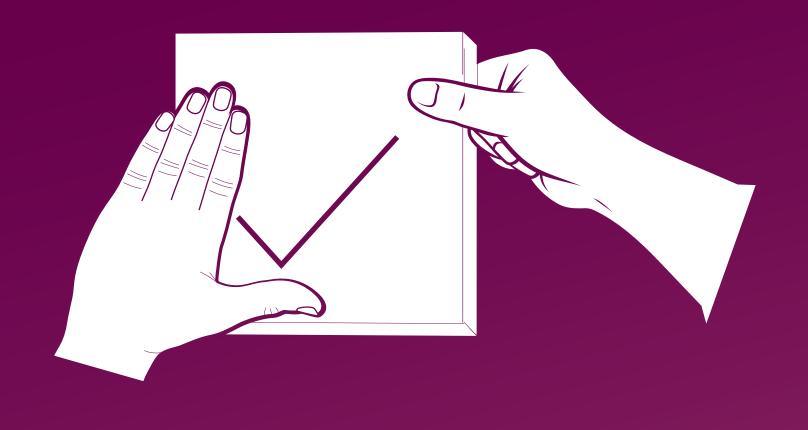

When removing Tiles from the wall, grip one corner and pull towards you. Steady the Tile with your other hand so it won't drop.

Do not pull the whole Tile straight towards you to remove.

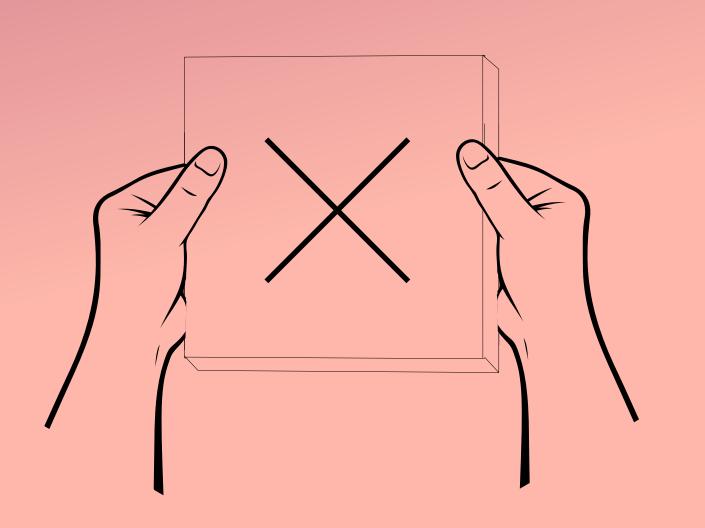

# 6—Set 3M Strips:


Allow to set for 60 minutes, this will prevent any Tiles from falling at a later date due to weaker adhesion.



## Install:

Now you're ready to place your Tiles back on the wall. Reconnect the small cables as you go, weaving them through the channels at the back to hide them. Do this one at a time and leave some length to connect the next Tile.

# Copy this cord layout for a good side-by-side Tile layout fit.

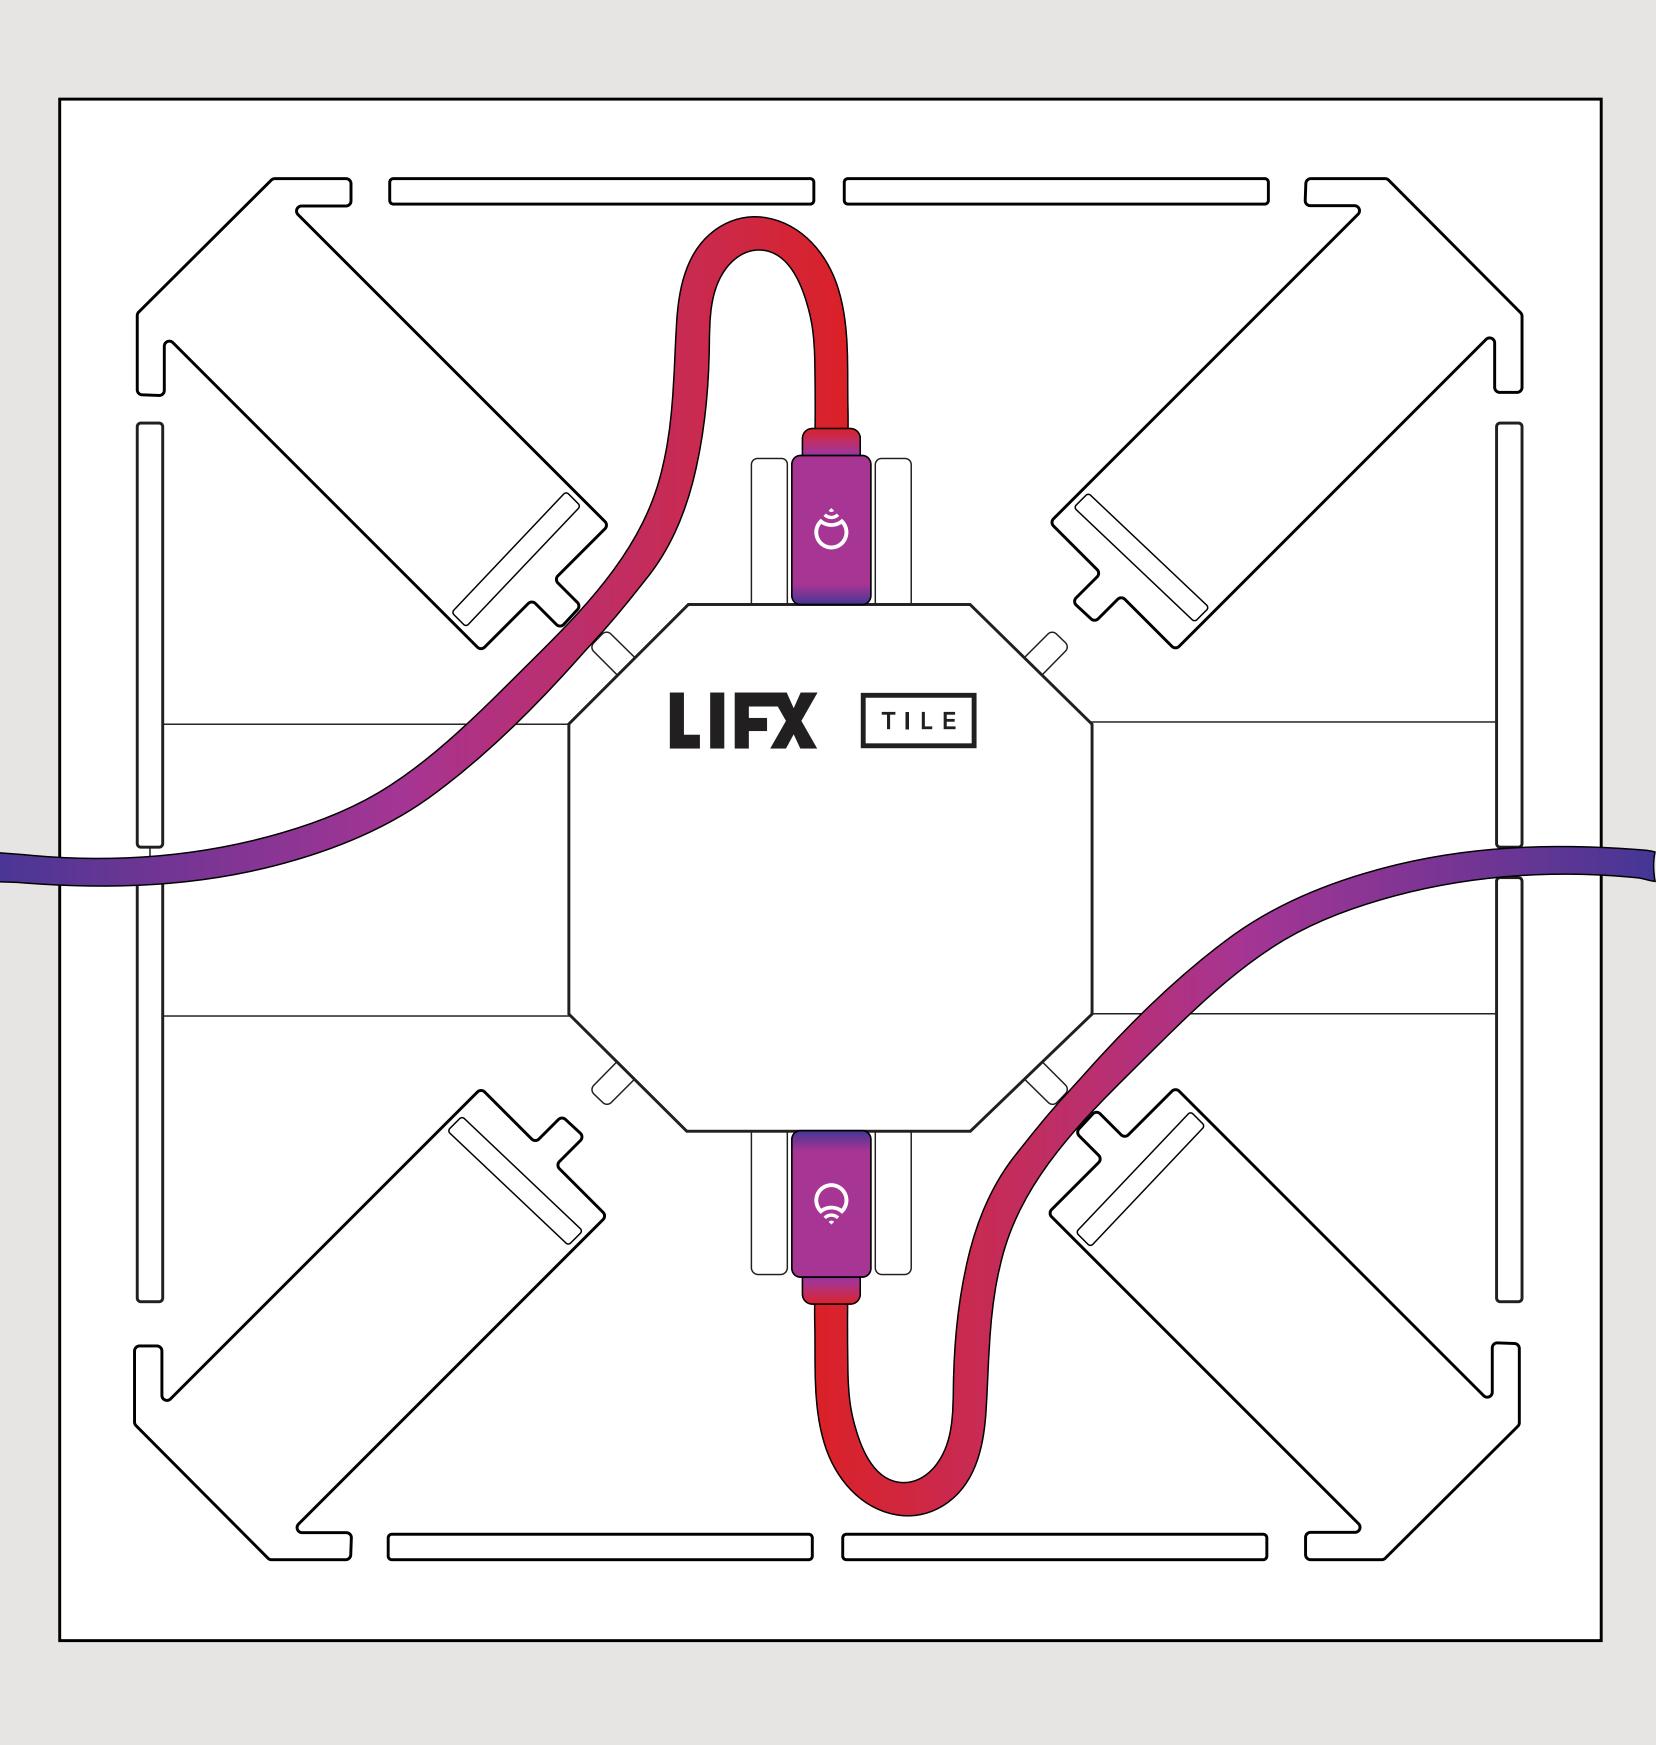

Line up and press each
Tile back into the 3M
Command Strips—you
will hear them click as
you press each corner.
Reconnect the Starter
Tile to the power supply
and turn on.

TILE

