
Incandescent Wall Sconce

WS57704-BK INSTALLATION SHEET

START FROM HERE Make sure POWER is COMPLETELY OFF at the fuse box. Have your fixture installed by a qualified licensed electrician Prepare everything in a clear area Wear gloves at all time during this installation Read instructions carefully before you start assembly Keep this installation sheet for future reference Technical Support: 1-855-855-8926 Remove fixture from its original package Please Note: Black Finish Only 120V input

- 2. Separate mounting plate (1c) from canopy (2a) by removing canopy screws (2b)
- **3.** Attach mounting plate (1c) to electrical junction box (1a) using junction box screws provided (1e) in hardware package
- 4. Make proper electrical connections (black to hot "L", white to neutral "N", ground to "GND") with wire nuts (1b) provided in hardware package
- **5.** Attach canopy (2a) to mounting plate (1c) with canopy screws (2b)
- 6. Insert bulb (4a) into fixture socket



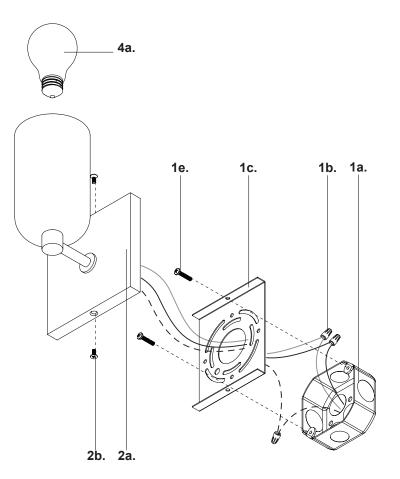

Incandescent Wall Sconce



START FROM HERE

- Make sure POWER is COMPLETELY OFF at the fuse box
- Have your fixture installed by a qualified licensed electrician
- Prepare everything in a clear area
- Wear gloves at all time during this installation
- Read instructions carefully before you start assembly
- Keep this installation sheet for future reference

Technical Support: 1-855-855-8926

- **1.** Remove fixture from its original package
- 2. Separate mounting plate (1c) from canopy (2a) by removing canopy screws (2b)
- **3.** Attach mounting plate (1c) to electrical junction box (1a) using junction box screws provided (1e) in hardware package
- 4. Make proper electrical connections (black to hot "L", white to neutral "N", ground to "GND") with wire nuts (1b) provided in hardware package
- Attach shade (3b) to fixture (3a) and secure with shade connector (3c), followed by socket nut (3d) using socket nut tool (3e)
- **6.** Attach canopy (2a) to mounting plate (1c) with canopy screws (2b)
- 1. Insert bulb (4a) into fixture socket

Please Note:

- Black/Glossy Opal Glass Finish Only
- 120V input

