



<https://starcraftvinyl.com>

## Heat Press User Guide Model SC-HP1515CS

---

Thank you for purchasing a StarCraft Heat Press. The screenshots below explain how to adjust the timer and temperature control panel. When using the control panel you need to only lightly touch the buttons as the control panel is a touch screen, not physical buttons. Pressing the buttons too hard may cause erratic behavior or damage the control panel. Always refer to the manufacturer guidelines for heat transfer vinyl or other material temperature, time, and pressure settings when pressing.

---



### Main Display Screen

The main screen displays the temperature of the upper heat press platen. Present Value (PV) displays the current temperature of the upper platen. Set Value (SV) displays the temperature the upper platen is set to when it is fully heated and ready to use.

---



### P-1 - Temperature Setting

Pressing the SET button at the bottom left changes to the P-1 setting which is the temperature you wish to set for the Set Value (SV) as described above. Using the up and down arrows to the right of the SET button you can adjust to the desired temperature value.

---



### P-2 - Timer Setting

Pressing the SET button at the bottom left again changes to the P-2 setting which is the time you wish the heat press to run once closed. Note this is only a timer setting and you must manually raise the platen upon timer expiration. Using the up and down arrows to the right of the SET button you can adjust to the desired time value in seconds.


---



### P-3 - Celsius or Fahrenheit Setting

Pressing the SET button at the bottom left again changes to the P-3 setting which allows you to set the temperature to Celsius or Fahrenheit. Using the up and down arrows to the right of the SET button you can adjust to the desired setting, indicated by the display of an F or C.

---



### P-4 - Auto-Off Timer


Pressing the SET button at the bottom left again changes to the P-4 setting which allows you to set the auto-off timer. This will turn off the heating elements in the platen if the heat press is not used for the number of minutes displayed in the P-4 setting. Using the up and down arrows to the right of the SET button you can adjust the desired auto-off timer setting in minutes.

---

## COUNTER

The COUNTER value displayed at the bottom of the digital display increments each time the timer expires during use. This allows the user to track how many items have been pressed. To reset the COUNTER, hold the CLEAR button for 5 seconds.

## Heat Press Diagram Model SC-HP1515CS

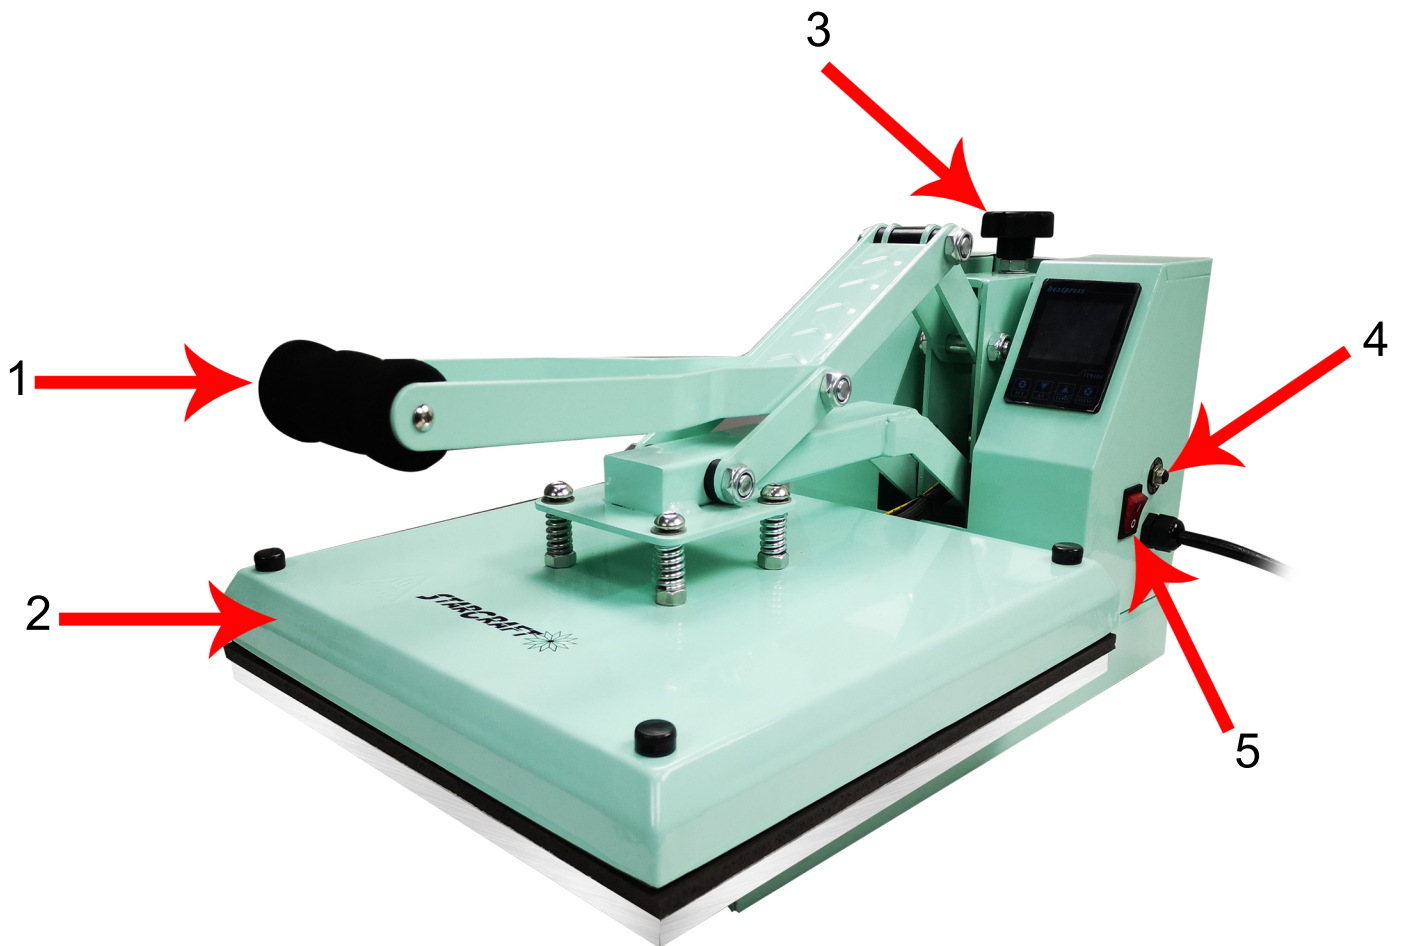

1. Handle to open/close the heat press.
2. Upper platen - This part gets very hot, do not touch and keep out of reach of children.
3. Pressure adjustment knob.
4. Circuit breaker switch.
5. Power Switch. Even though this model includes an automatic off timer when idle, **ALWAYS** turn unit off when not in use.