



12V EXTERIOR LED EYELID STEP LIGHTS

PRODUCT FEATURES

- Input voltage: 9-14V DC 50/60Hz
- Australian waterproof 12V DC constant voltage driver (must be wired in parallel)
- Suitable for 12V AC Iron core transformers
- Recommended CLA drivers: OTTER1 and CLA111011
- Wattage: 1W
- 1pc CREE LED chip
- Material: solid bronze or solid brass
- Colours: aged bronze or nickel plated
- Ambient temp: -40 to +85°C
- CRI: 80
- Suitable for 2 way switching with compatible driver
- Suitable to be used with sensors with compatible driver
- Not suitable for dimming


LIFE TIME 50,000 HOURS	BEAM 120°	IP65 RATED	WARRANTY 2YEARS REPLACEMENT
------------------------------	--------------	---------------	-----------------------------------



STE9



STE10

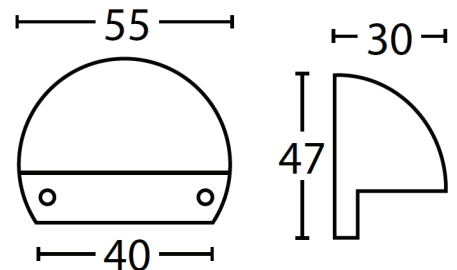

CODE	DESCRIPTION	TECHNICAL DATA			PACKAGING DETAILS		
		KELVIN (K)	LUMENS (LM)	WATT (W)	WEIGHT (KG)	BOX (CM)	CARTON QTY
STE9	STEP EYELID LED 12V DC S/M BRONZE AGED 1W 3000K	3000K	107LM	1	0.46	6 x 4.5 x 6	50
STE10	STEP EYELID LED 12V DC S/M Brass Nickel Plated 1W 3000K	3000K	107LM	1	0.46	6 x 4.5 x 6	50

UPDATED ON 12/12/2017

Tel: (02) 9938 7100 | Fax: (02) 9938 7115 | Email: sales@clalighting.com.au

Website: www.clalighting.com.au

Follow us: facebook.com/CLALighting

CLA LIGHTING