TWINSPOT LITE 16 ttor



ADVANCED



FEATURES

- Long life electronics
- Fully compliant (AS/NZS 2293)
- Average power consumption <0.45W
- High Quality Lithium batteries (LiFePO₄) and smart charger



WEATHERPROOF

IP65 rated, suitable for demanding environments



SINGLE POINT UNIT

Ektor products work as SPUs out of the box



ADJUSTABLE HEAD

Adjustable spotlighting to suit requirements




ECO FRIENDLY

Using a High Quality Lithium battery (LiFePO₄)

CONTACT P: 1300 4EVOLT (438 658) E: sales@evolt.com.au F: +61 2 9502 1154 ektor.com.au

jektor

TWINSPOT LITE

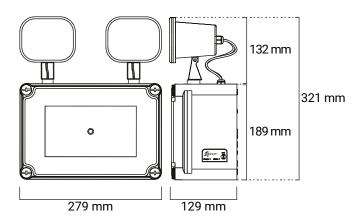

PRODUCT RANGE			
ORDER CODE	PRODUCT NUMBER	SKU	QTY
EV-TWINSPOT-WP-LITE Twinspot IP65 Lite Emergency Luminaire	9336462110546	11054	4

GENERAL FEATURES

- Non-maintained operation
- Emergency output of 2 x 140 lm
- Low energy consumption (avg. <0.45W)

BUILT TO LAST

- Long life electronics
- 7 Years Design Life 60,000 hours at max. ambient
- High Quality Lithium battery (LiFePO₄) and smart charger

SUITABLE INSTALLATION TYPES (OUT OF THE BOX)

Standalone (SPU)

ACCESSORY RANGE	
ORDER CODE	DESCRIPTION
EV-1500MAH-6.4V-LIFEP04	1500mAh 6.4V 2 Cell LiFePO ₄ battery

OPERATIONAL INF	ORMATION		
GENERAL			
Voltage	240V~ 50Hz		
Ambient temp.	0 to 40°C		
Class	2		
IP rating	IP65		
IK rating	IK10		
Wiring	Terminal block (1-16 mm 🗉)		
Mounting type	Surface		
EMERGENCY			
Emergency lamp power	2.7W		
Rated duration	90 / 120 min		
Rated lumens	2 x 140 lm (2 hr)		
BATTERY		CHARGE	
Туре	LiFePO ₄	Туре	Smart charge
Voltage	6.4 V	Time	16 Hours
Codes	01302	Operation	Variable
CONSTRUCTION			
Body	PC V2, 750 glow wire		
Diffuser	PC V2, 750 glow wire		
Gear tray	Galvanized steel		
Weight	2.1 kg net / 10.46 kg gross		
COMPLIANCE			
Standards	AS/NZS 60598.2.22 AS/NZS 2293.3	IEC 60598- AS CISPR 1	

NOTE: For more information on the chemical resistance of our polycarbonate or our compliance documentation, please see our website.

TOTAL POWER CONSUMPTION (TPC)		
MAX.	AVG.	
2.5 W	0.45 W	

NOTE: Average power consumption calculated with the assumption of four emergency events per year and that the battery charger is in standby at all other times (above typical usage).

ektor.com.au **E: sales@evolt.com.au** P:1300 4EVOLT (438 658)

