

**STEPPED DISPLAY STAGING - STYLE 1** F1(01)  
Assembly Instructions





**COMPONENTS**

Components	Approx. Length Of Stand										
	2'	4'	6'	8'	10'	12'	14'	16'	18'	20'	SPEC
Tube A 21½" Connector	11	22	33	44	55	66	77	88	99	110	
Tube B 5 5/8" Leg	10	15	20	25	30	35	40	45	50	55	
Tube C 8½" Spacer	14	21	28	35	42	49	56	63	70	77	
Tube D 9" Upright	8	12	16	20	24	28	32	36	40	44	
Tube E 19" Upright	2	3	4	5	6	7	8	9	10	11	
Tube F 29" Upright	2	3	4	5	6	7	8	9	10	11	
3 Way Joints	10	10	10	10	10	10	10	10	10	10	10
4 Way Joints	6	11	16	21	26	31	36	41	46	51	
5 Way Joints	6	9	12	15	18	21	24	27	30	33	
6 Way Joints	--	3	6	9	12	15	18	21	24	27	
Caps	10	15	20	25	30	35	40	45	50	55	
Trays	4	8	12	16	20	24	28	32	36	40	


Left, Right and Mid Sections are to made up of the above components

Left Hand Sections	1	1	1	1	1	1	1	1	1	1	1
Right Hand Sections	1	1	1	1	1	1	1	1	1	1	1
Mid Sections	--	1	2	3	4	5	6	7	8	9	


1. Please check the components.
2. Assemble the upright sections as illustrated and join using connector tubes A.
3. The joints are a tight fit and should be knocked into the tube upto their 'shoulders'. Assembly is best achieved working on a firm surface, using a wooden or rubber mallet.

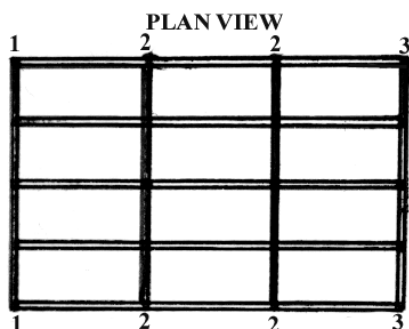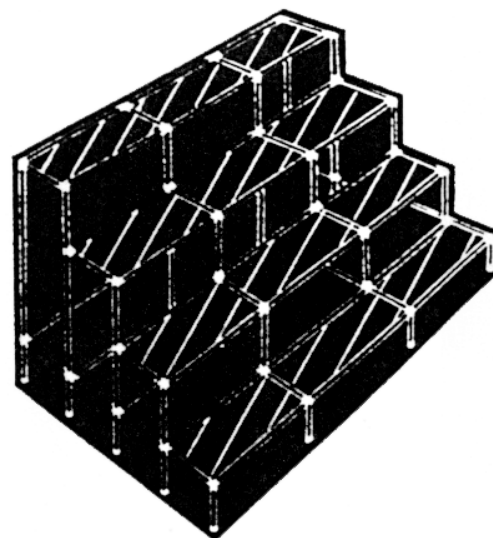


**6FT  
LONG  
STAND**



**LEFT HAND END (1/1)**

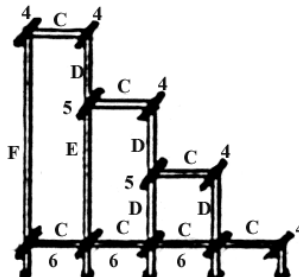

**MID SECTION (2/2)**



**RIGHT HAND END (3/3)**

**TWO WESTS & ELLIOTT LTD**

4, Carrwood Road, Chesterfield, Derbyshire, S41 9RH. Tel: (01246) 451077