

**STEPPED DISPLAY STAGING - STYLE 2** F2(01)  
*Assembly Instructions*




**COMPONENTS**

Components	Approx. Length Of Stand										
	2'	4'	6'	8'	10'	12'	14'	16'	18'	20'	SPEC
Tube A 21½" Connector	10	20	30	40	50	60	70	80	90	100	
Tube B 5 5/8" Leg	8	12	16	20	24	28	32	36	40	44	
Tube C 8½" Spacer	12	18	24	30	36	42	48	54	60	66	
Tube D 9" Upright	8	12	16	20	24	28	32	36	40	44	
Tube E 19" Upright	2	3	4	5	6	7	8	9	10	11	
Tube F 29" Upright	2	3	4	5	6	7	8	9	10	11	
3 Way Joints	8	8	8	8	8	8	8	8	8	8	8
4 Way Joints	8	12	16	20	24	28	32	36	40	44	
5 Way Joints	4	8	12	16	20	24	28	32	36	40	
6 Way Joints	--	2	4	6	8	10	12	14	16	18	
Caps	8	12	16	20	24	28	32	36	40	44	
Trays	3	6	9	12	15	18	21	24	27	30	


Left, Right and Mid Sections are to be made out of the above components

Left Hand Sections	1	1	1	1	1	1	1	1	1	1	1
Right Hand Sections	1	1	1	1	1	1	1	1	1	1	1
Mid Sections	--	1	2	3	4	5	6	7	8	9	


1. Please check the components.
2. Assemble the upright sections as illustrated and join using connector tubes A.
3. The joints are a tight fit and should be knocked into the tube upto their 'shoulders'. Assembly is best achieved working on a firm surface, using a wooden or rubber mallet.

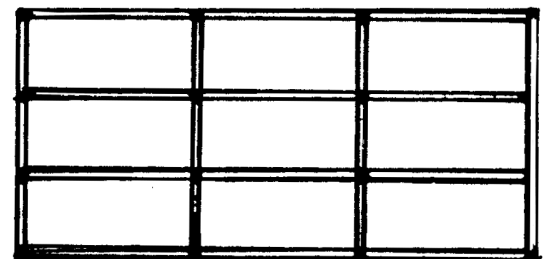


PLAN VIEW 6ft LONG STAND

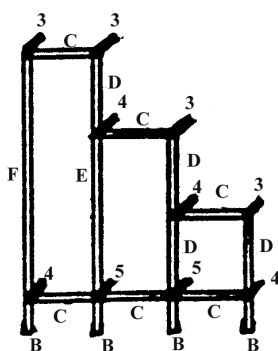

LEFTHAND UPRIGHT  
1 PER STAND

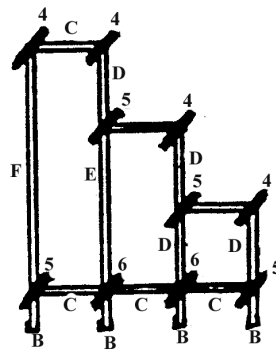

MID UPRIGHT  
1 FOR 4', 2 FOR 6' ETC

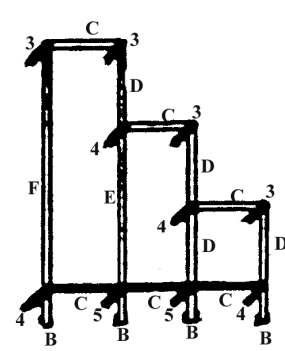

RIGHTHAND UPRIGHT  
1 PER STAND

**TWO WESTS & ELLIOTT LTD**

4, Carrwood Road, Chesterfield, Derbyshire, S41 9RH. Tel: (01246) 451077