

STEPPED DISPLAY STAGING - STYLE 3 F3(06)

Assembly Instructions





COMPONENTS

Components	Approx. Length Of Stand										SPEC
	2'	4'	6'	8'	10'	12'	14'	16'	18'	20'	
Tube A 21½" Connector	8	16	24	32	40	48	56	64	72	80	
Tube B 5 5/8" Leg	8	12	16	20	24	28	32	36	40	44	
Tube C 8½" Spacer	10	15	20	25	30	35	40	45	50	55	
Tube D 9" Upright	6	9	12	15	18	21	24	27	30	33	
Tube E 19" Upright	2	3	4	5	6	7	8	9	10	11	
3 Way Joints	8	8	8	8	8	8	8	8	8	8	8
4 Way Joints	4	8	12	16	20	24	28	32	36	40	
5 Way Joints	4	6	8	10	12	14	16	18	20	22	
6 Way Joints	--	2	4	6	8	10	12	14	16	18	
Caps	8	12	16	20	24	28	32	36	40	44	
Trays	3	6	9	12	15	18	21	24	27	30	


Left, Right and Mid Sections are to be made out of the above components

Left Hand Sections	1	1	1	1	1	1	1	1	1	1	1
Right Hand Sections	1	1	1	1	1	1	1	1	1	1	1
Mid Sections	--	1	2	3	4	5	6	7	8	9	


1. Please check the components.
2. Assemble the upright sections as illustrated and join using connector tubes A.
3. The joints are a tight fit and should be knocked into the tube upto their 'shoulders'. Assembly is best achieved working on a firm surface, using a wooden or rubber mallet.

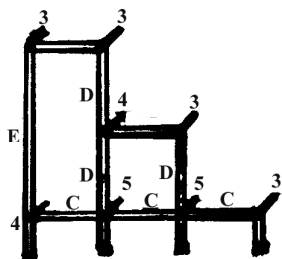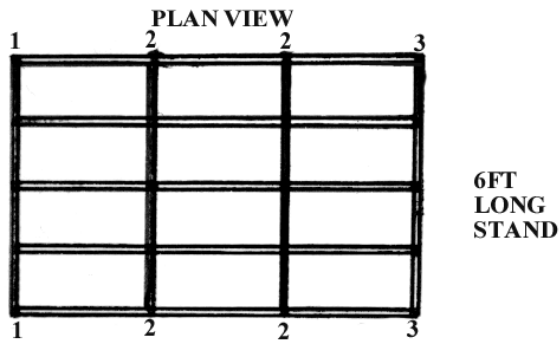

LEFTHAND END (1/1)

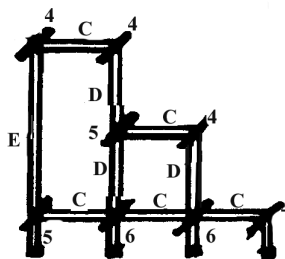

MID SECTION(2/2)

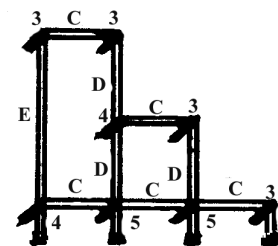

RIGHTHAND END (3/3)

TWO WESTS & ELLIOTT LTD

4, Carrwood Road, Chesterfield, Derbyshire, S41 9RH. Tel: (01246) 451077