

STEPPED DISPLAY STAGING - STYLE 5 F5(06)

Assembly Instructions






COMPONENTS

Components	Approx. Length Of Stand										
	2'	4'	6'	8'	10'	12'	14'	16'	18'	20'	SPEC
Tube A 21½" Connector	5	10	15	20	25	30	35	40	45	50	
Tube B 5 5/8" Leg	6	9	12	15	18	21	24	27	30	33	
Tube C 8½" Spacer	6	9	12	15	18	21	24	27	30	33	
Tube D 9" Upright	4	6	8	10	12	14	16	18	20	22	
3 Way Joints	6	6	6	6	6	6	6	6	6	6	6
4 Way Joints	2	5	8	11	14	17	20	23	26	29	
5 Way Joints	2	3	4	5	6	7	8	9	10	11	
6 Way Joints	--	1	2	3	4	5	6	7	8	9	
Caps	6	9	12	15	18	21	24	27	30	33	
Trays	2	4	6	8	10	12	14	16	18	20	


Left, Right and Mid Sections are to be made out of the above components

Left Hand Sections	1	1	1	1	1	1	1	1	1	1	1
Right Hand Sections	1	1	1	1	1	1	1	1	1	1	1
Mid Sections	--	1	2	3	4	5	6	7	8	9	


1. Please check the components.
2. Assemble the upright sections as illustrated and join using connector tubes A.
3. The joints are a tight fit and should be knocked into the tube up to their 'shoulders'. Assembly is best achieved working on a firm surface, using a wooden or rubber mallet.

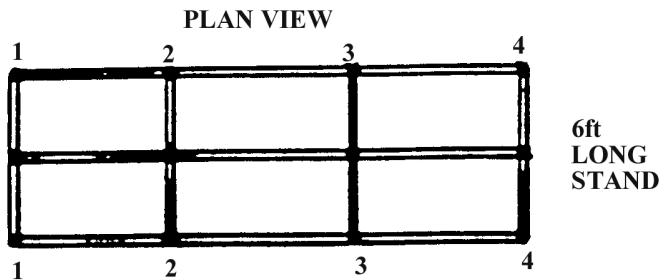

LEFTHAND END (1/1)

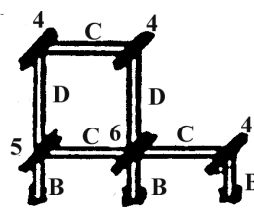

MID SECTION (2/2)

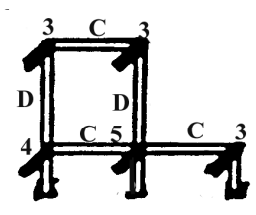

RIGHTHAND END (3/2)

TWO WESTS & ELLIOTT LTD

4, Carrwood Road, Chesterfield, Derbyshire, S41 9RH. Tel: (01246) 451077