



375 Oser Ave
Hauppauge, NY 11788
631-858-0114
sales@garmentprinterink.com

PRE-INSTALLATION CHECKLIST

Mimaki TxF150/300



Congratulations on your printer purchase! We know you are excited to get going. In order to create the best experience possible, you need to read, initial, sign, and send back this checklist / site survey so that we can make sure everything is in place before installation is scheduled.

Business Name:

Contact:

Phone Number:


Installation Address:

Email Address:


DELIVERY:

All printers are shipped freight, CURBSIDE DELIVERY. It is the customer's responsibility to bring their equipment into their desired location. In most scenarios you will need 2-3 people to assist with lifting and moving the printer. You may require tools for uncrating (like a forklift, pallet jack, dolly or rolling cart or crowbar). You will be called in advance by the shipping company to schedule delivery, so please plan accordingly. If you require rigging, please request a quote before your printer has shipped.


PRINTER DIMENSIONS:

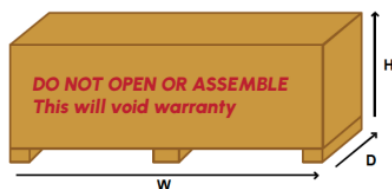

Width	84 in.
Depth	30 in.
Height	39 in.
Weight	367 lbs.

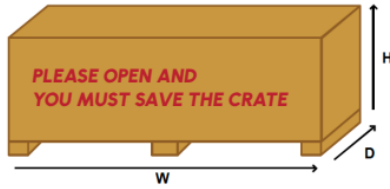

Width	84 in.
Depth	59 in.
Height	54 in.
Weight	1,083 lbs.

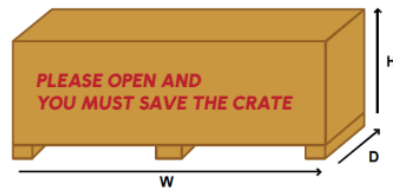

Width	86 in.
Depth	50 in.
Height	51 in.
Weight	1,084 lbs.



TxF with 32" Shaker / Dryer



TxF with 24" Shaker / Dryer

Model	Width	Depth	Height	Weight
TxF150-75	78 in.	28 in.	55 in.	278 lbs.
TxF300-75	78 in.	28 in.	55 in.	278 lbs.
32" Shaker / Dryer	51 in.	74 in.	40 in.	680 lbs.
24" Shaker / Dryer	40 in.	76 in.	41 in.	680 lbs.

Printer Area Requirements:

Recommended minimum area around printer and Shaker 15' x 15'

I Understand all measurements crated and uncrated

Initials

Printer Climate Requirements

The dedicated area for your printer must be climate controlled (70-75 degrees Fahrenheit and humidity between 35% and 60% with no condensation) and Installation should not take place in direct sunlight, on an uneven surface, high vibration area, in direct line of an air conditioner or open flame, within high dust production or an area with harmful chemicals. The dedicated area should be well vented to the outside. It is recommended to purchase a fume filter as the TPU fumes may be hazardous.

Initials

Power Requirements:

Mimaki Txf150/300: A/C 100 - 120V

Initials

32" and 24" Heater/Shaker Unit: A/C 220V 30amps L6-30 style outlet, 1 Dedicated Circuit.

Initials

Technology Requirements:

To keep your RIP software working at its peak performance, a PC with the following is recommended:

Dual Core CPU, 2.0 GHz CPU or faster, 8-16 GB RAM or more, 100 GB Free Space on Hard Drive, Windows 10 or later, 100 Mb/s Ethernet network card, High-Resolution monitor - SXGA (1,280 X 1,024 pixels) or better.

Initials

RIP software is included with the printer and you will be trained on it during installation.

Supply Requirements:

The Mimaki TxF150 and TxF300 come with ink, powder, and film.

Mimaki TxF150: CMYK + WW

Mimaki TxF300: CMYK + WWWW

1 KG Powder

24" or 32" Roll of Cold Peel DTF Film

Initials

Installation:

Depending on which model printer you purchase, it may require four (4) people to lift your printer to put it on its stand during installation. Please plan accordingly.

Initials

Important Notes: *Please check each box*

- Please refrain from booking print jobs until you have been trained to operate your new equipment.
- Design training is not included, you must have a General knowledge of graphics programs like Illustrator or Corel Draw and have some designs you would like to see prepared for installation beforehand.
- Please retain the shipping containers in case the printer ever needs to be sent back for service.
- Be sure to inspect the packages upon arrival. If damage to either the crate or boxes is present, please take pictures and report to sales@garmentprinterink.com immediately.

Customer certifies that they have received and understand the installation requirements laid out in this pre-installation checklist. The customer agrees that all requirements have been met prior to the installation appointment. If any of these requirements have not been met on the day of your installation by a Garment Printer Ink technician, the printer cannot be installed, and the installation and training will be rescheduled at the customer's expense.

Signature:

Printed Name:

Business Name:

Date:
