
CRAFT TABLE DUAL HEIGHT


ASSEMBLY INSTRUCTIONS

Position the top of the Craft Table (CT-TOP) and the leaf of the work table (CT-FLAP) you need the flap which is the same width as the top on a smooth flat surface (the floor is best) as shown below. You will be building the table upside down turning it over at the final step.

Using hinge H2 and screw 30-15S join the top and leaf together.

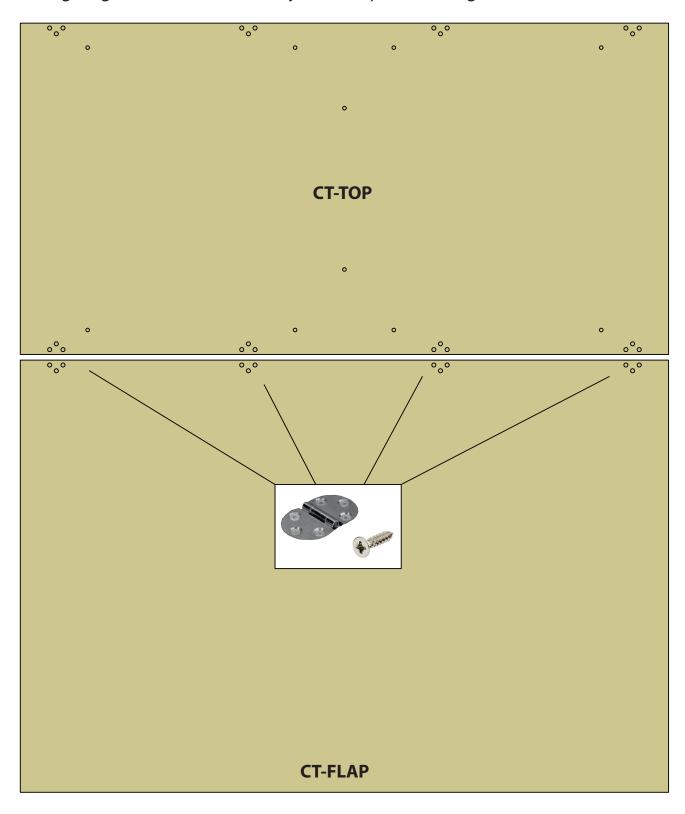



Screw CB1 bolts as indicated below into all of the holes marked with a red circle.

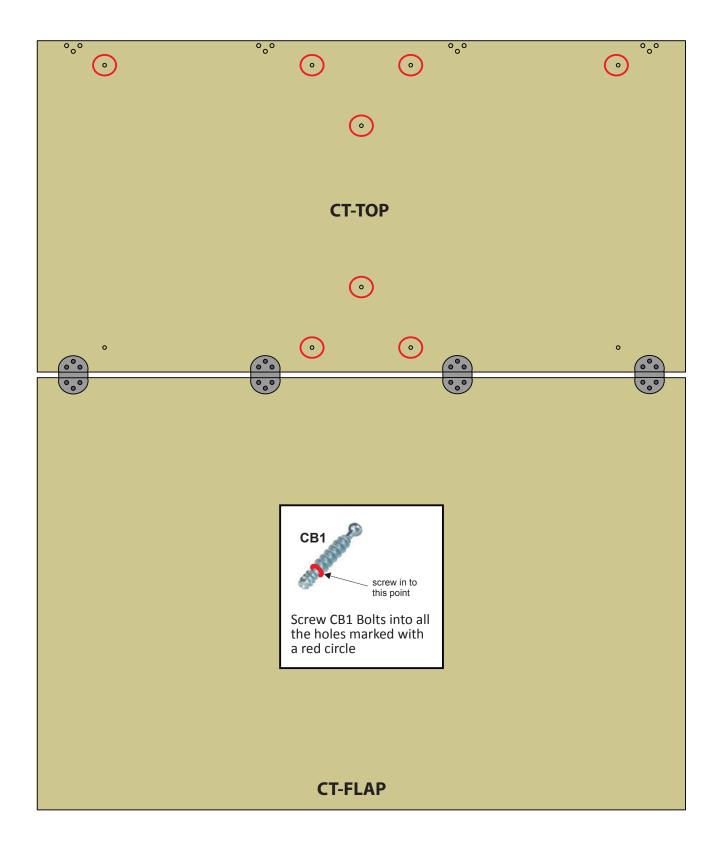


Insert CL1 locks as indicated below.


Screw CB1 bolts as indicated below into all of the holes marked with a red circle.

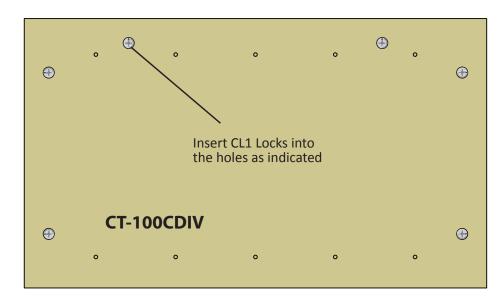

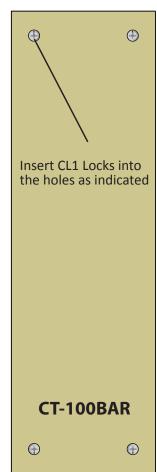


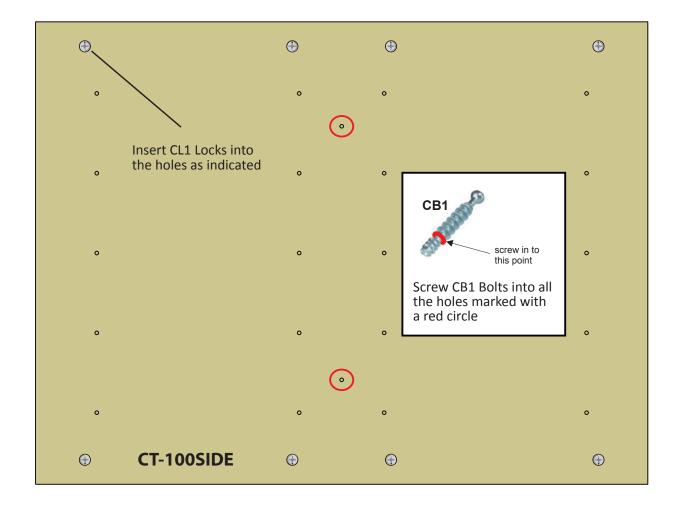

Attach the Centre Panel (CT-70CDIV) to the Side (CT-70SIDE) as indicated. Once slotted together ensure you tighten the connecting locks.

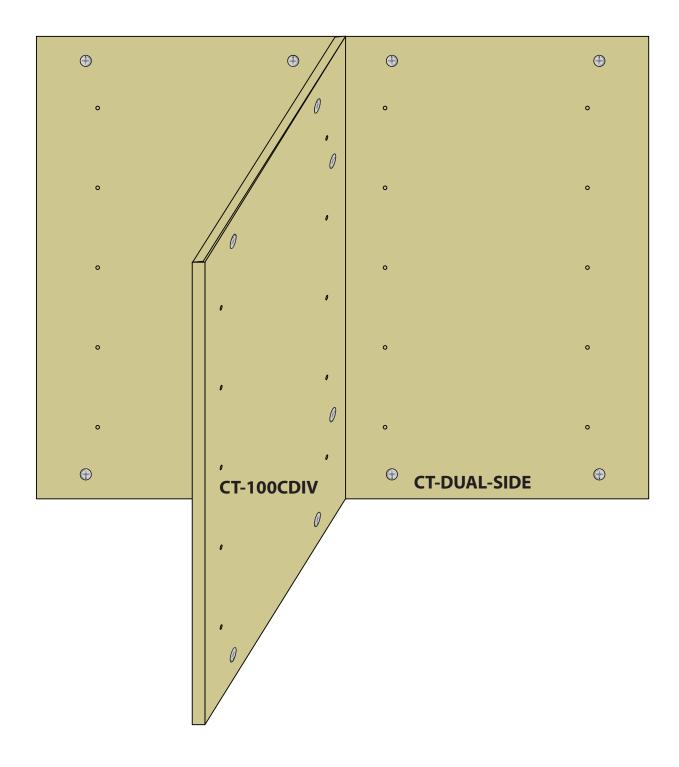


Attach hinge H1 using screw 30-15S to the both of the Legs (CT-70LEG & CT-100LEG).

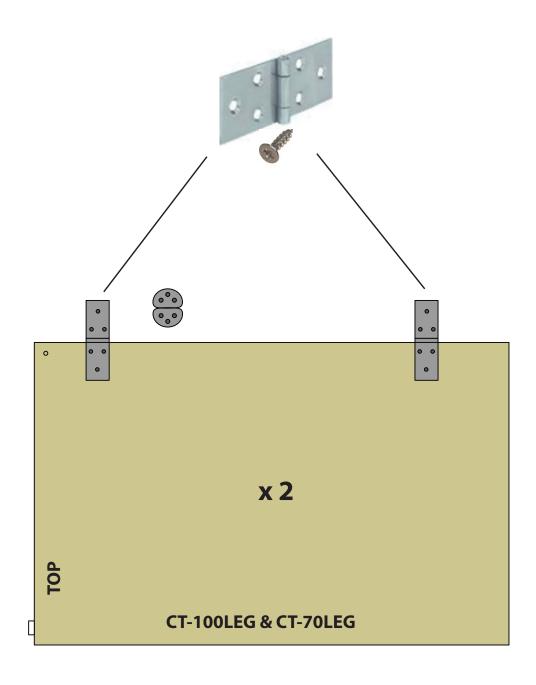


With the Top and Leaf still laying on the the floor attach the Centre Panel & Side which you joined together in STEP 4 and the Bar (CT-70BAR) as indicated. Once slotted together ensure you tighten the connecting locks. Ensure you attach the top of the side and the top of the bar to the CT-TOP these should be marked with a label.

Plan view looking down from above

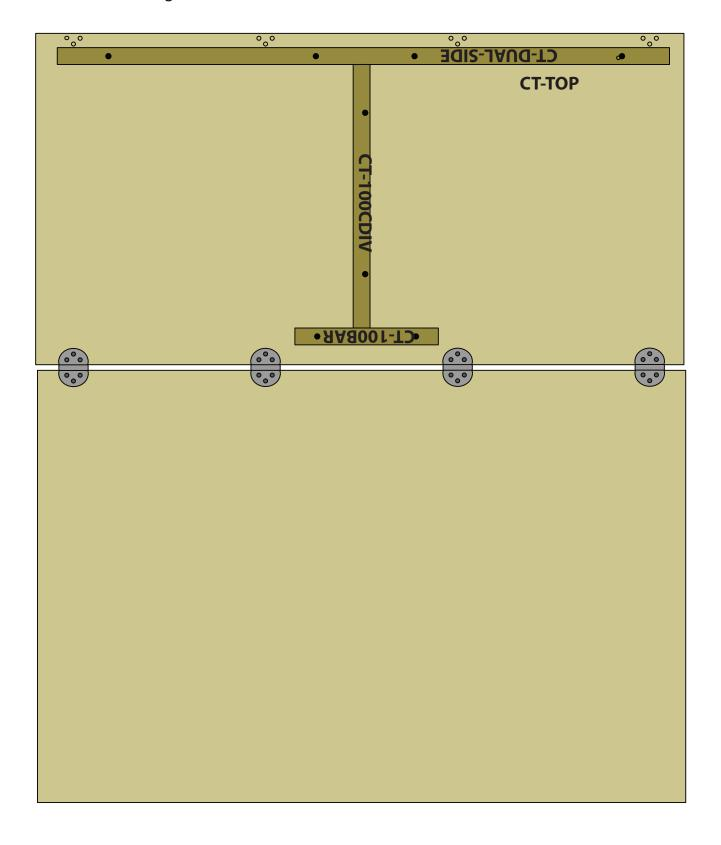



Attach the CT-100LEG to the Bar using the Hinge which you have already attached to the Leg and the 30-15S screws provided. Ensure the leg is the correct way up with the white nylon pad which is attached the leg touching the underside of the leaf.

Plan view looking down from above

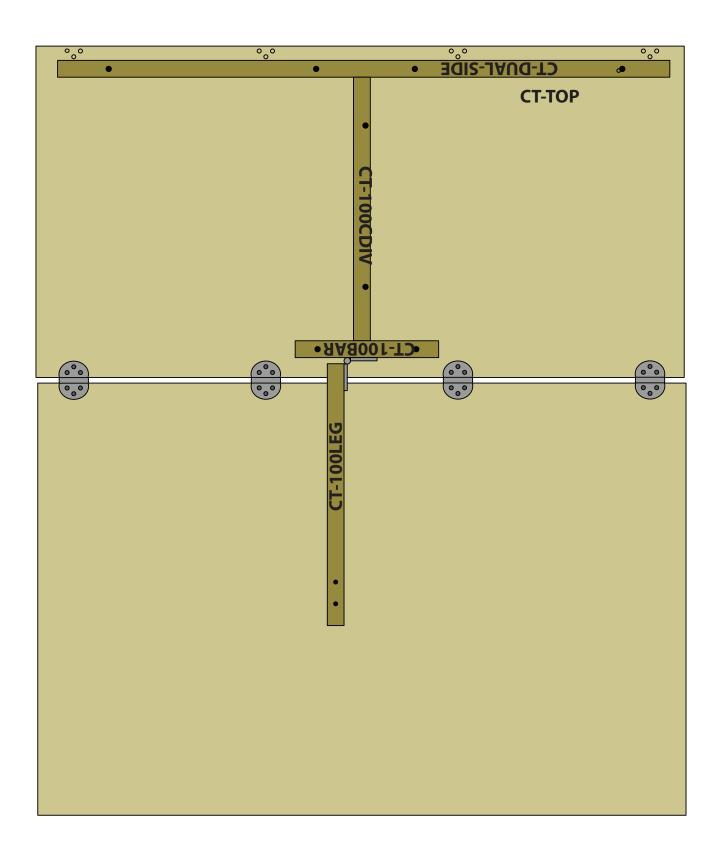


Screw CB1 bolts as indicated below into all of the holes marked with a red circle.

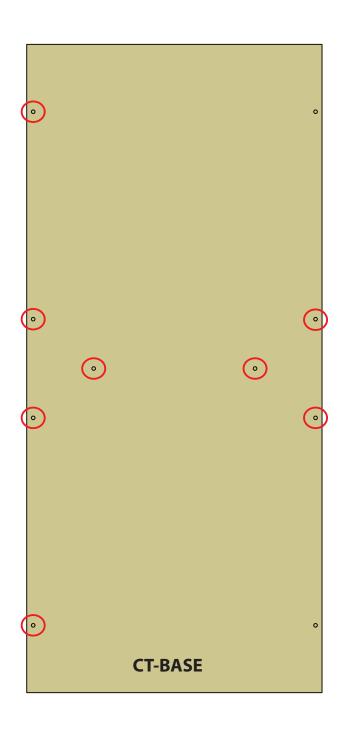




Attach the Base (CT-BASE) to the parts which you have already constructed. Once slotted together ensure you tighten the connecting locks.

Plan view looking down from above

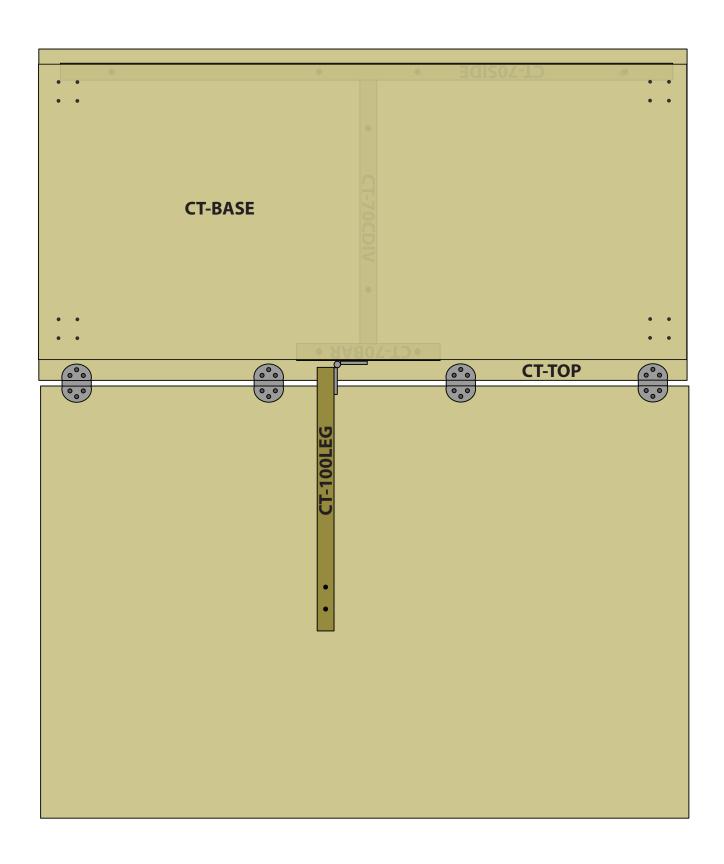




Attach the four casters to the Base (CT-BASE) using screw 30-17S
Attach the two casters to the BOTH the Legs (CT-70LEG & CT-100LEG) using screw 30-17S

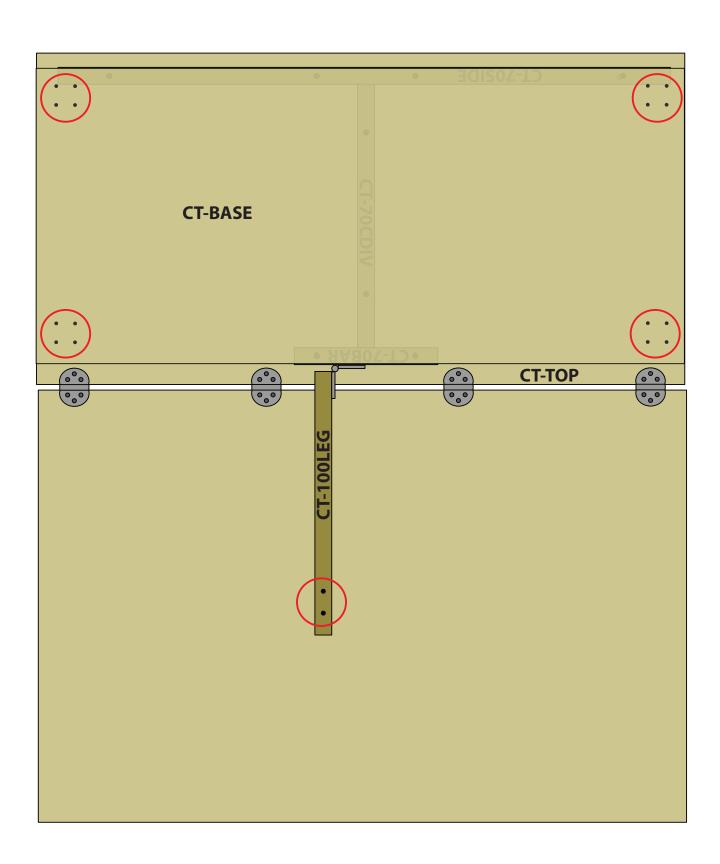


IT IS HIGHLY RECOMMENDED TO HAVE TWO PEOPLE PRESENT TO COMPLETE THIS STEP

Fold the Legs in as indicated below and lift the leaves up so that the table is closed. DO NOT LET GO OF THE LEAVES.


Carefully turn the table over so that it is sat on its wheels, supporting the leaves at all times.

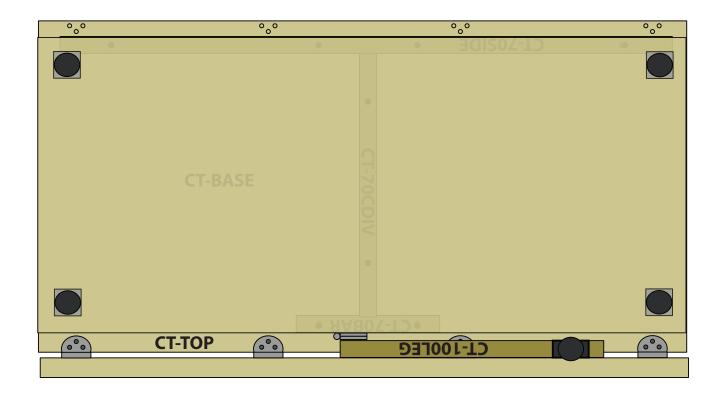



SIDE VIEW


Attach hinge H2 with screw 30-15S to the bar on the side of the craft table.

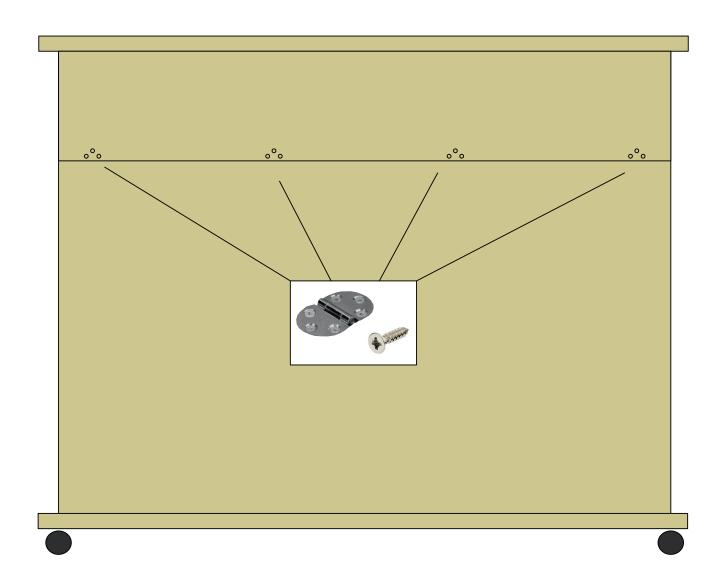

SIDE VIEW

Attach the CT-70LEG to the table using the Hinge which you have already attached to the Leg and the 30-15S screws provided. Ensure the leg is the correct way up with the caster on the floor.

Attach the CT-DUAL-FLAP to the table using the Hinge which you have already attached to the Bar and the 30-15S screws provided.

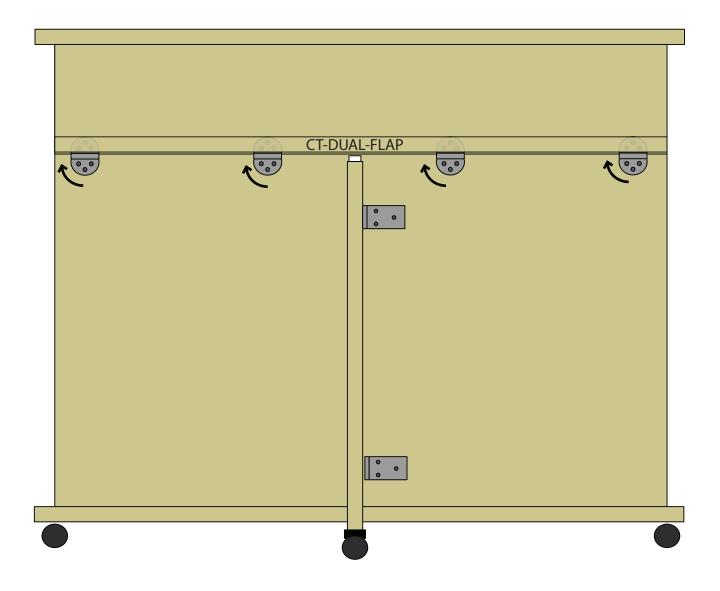

Now that the table is the correct way up you can fit your shelves by using the mini connecting bolts (CB2). Select your shelf position screw into place four of the mini connecting bolts. Locate your shelf onto the bolts and tighten the locks which are pre-fitted into the underside of the shelf.





Designed and Manufactured by:

Storage 4 Crafts

www.storage 4 crafts.co.uk

tel. 0800 048 8606