

# G100/30 - ASSEMBLY INSTRUCTIONS

Please note that all diagrams of panels are not to scale and depending on the unit you have purchased certain holes may be in slightly different positions. This will not affect the method of assembly that is required.

HARDWARE	
Connecting Lock (CL1)	
Connecting Bolt (CB1)	
Caster (C2)	
Caster Screw (35-17S)	
Shelf Peg (SP1)	

Please note BEST Craft Organiser units do not require shelf pegs

### STEP 1

Attach casters to the base of your unit using caster screw (35-17S) provided. There will be 16 pre-drilled holes in the base to align casters.

Base (not to scale)

### STEP 2

Insert connecting locks (CL1) into the holes in the sides, centre divider (if applicable) and back(s) with the arrow pointing towards to closest edge of the panel

### STEP 3


Screw connecting bolts (CB1) into the holes in the top, bottom, sides and centre dividers (if applicable) as indicated below. The thread at the base of the bolt should be fully screwed into the holes

Left Hand Side      Right Hand Side      Centre Divider

Also screw connecting bolts into reverse of the centre divider

## UNITS SUPPLIED WITH DOORS - If you chose a unit complete with doors then please follow these extra steps to complete your unit.



1. AT STEP 1 - Attach the magnetic catch(es) to the underside of the top using the pre drilled holes and screws provided with the catch
2. AT STEP 5 - Before tightening the connecting locks to secure the top of the unit fit the door(s) to the unit by inserting the hinge pegs into the housings in the top and bottom. You may need to lift the top slightly to do this
3. Attach a door knob to each door using the screws provided and attach the metal plate to the inside of the door to align with magnetic catch.

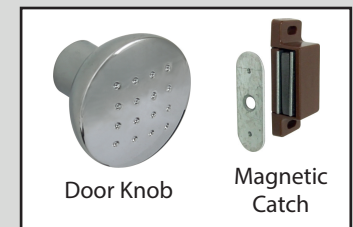



Please note if you have a BEST organiser unit you will either have to leave a 1 inch space at the top of the unit to allow for the magnetic catch or not fit the magnetic catch.

These instructions are suitable for all Really Useful units up to 100cm height and all BEST Organiser units up to 30 slot height.



## SINGLE UNIT

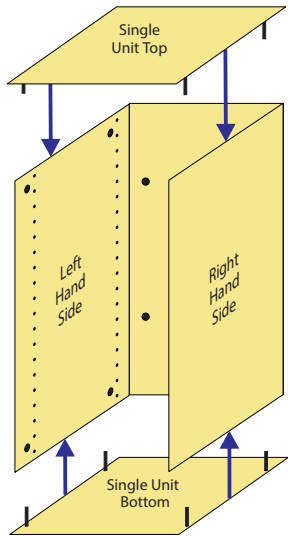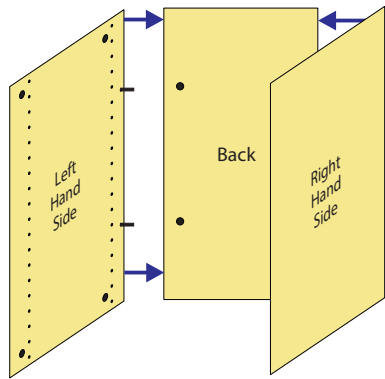

## DOUBLE WIDTH UNIT

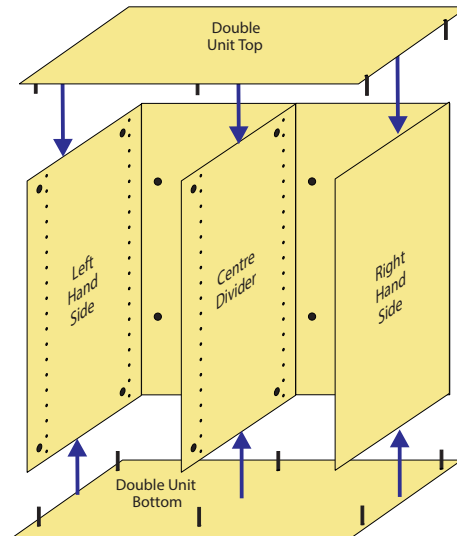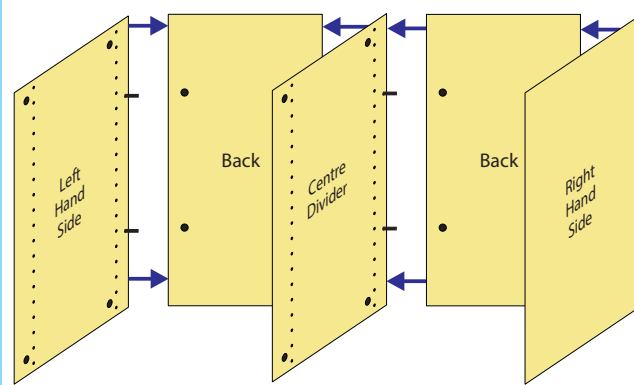

## TRIPLE WIDTH UNIT

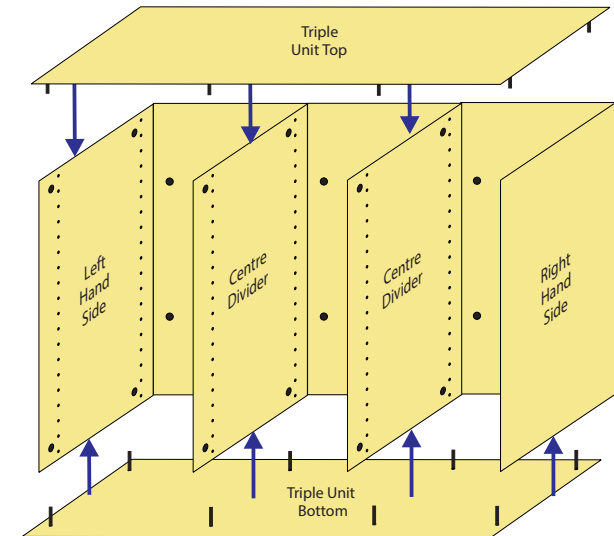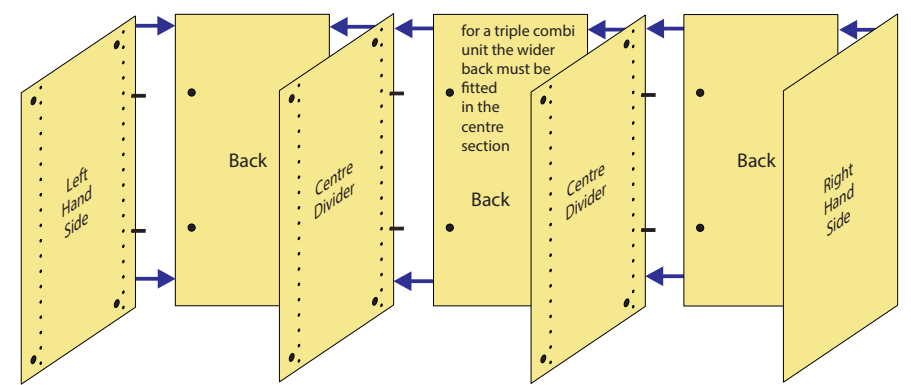

### STEP 4

Attach the sides and centre divider(s) (if applicable) to the back(s) by inserting the connecting bolts which you have attached to these panels into the holes in the edges of the back and tightening the connecting locks (turn the lock fully until it stops).

### STEP 5

Attach the top and bottom to the section you made in step 4 and tighten the connecting locks to secure.

### STEP 6

Fit shelves or drawers into the unit using shelf pegs or runners provided. Please note that you do NOT need to use a shelf or runners for the bottom drawer or box.

ALL CABINETS ARE MANUFACTURED IN THE UK  
(Distributed in Australia by Arnolds Scrapbook & Craft)

If you have any queries during assembly please call us free from a UK landline on 0800 048 8606  
International +44 1392 914089 Office hours are 9am-5pm GMT

[www.storage4crafts.co.uk](http://www.storage4crafts.co.uk)  
Telephone: 0800 048 8606.  
[mail@storage4crafts.co.uk](mailto:mail@storage4crafts.co.uk)  
Pathfields Business Park,  
South Molton, Devon, EX36 3LL

**storage**  
4 CRAFTS