


# IP Camera User's Manual

REV. 3.0

- ※ The IP camera is a specification embedded in the CURADLE PRO PLUS 160 (PX-ICU160C) model.  
The IP camera model provided may be changed without prior notice to improve performance.
- ※ If you want to use the IP camera, wireless internet(Wi-Fi) should be installed in the location where the machine is installed. Only 2G is connected, not 5G.

## ● Before Use

- Download the EZVIZ App on the App Store or Google Play.  
App Name : EZVIZ

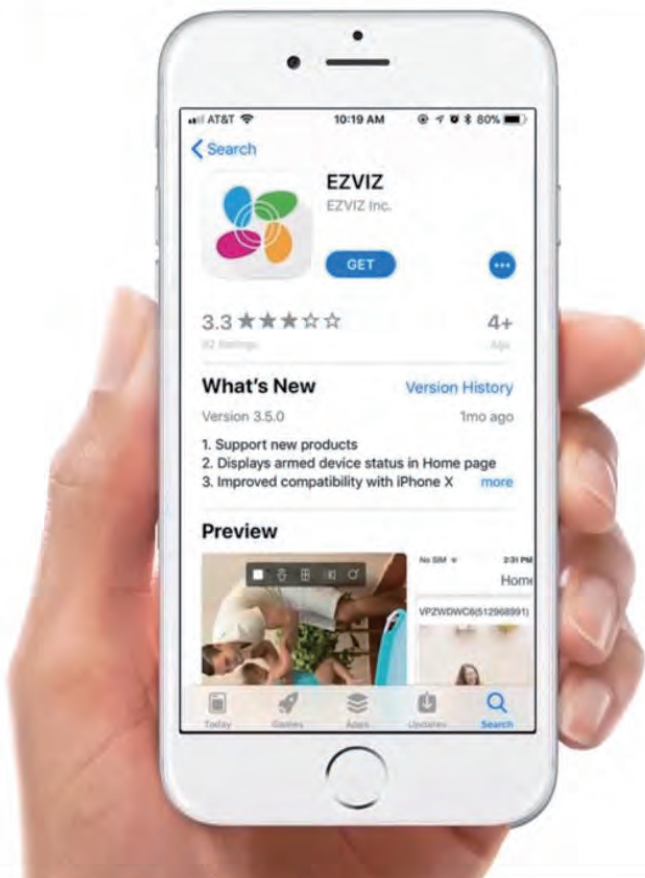


\* It is recommended to use security encryption method TKIP when setting wireless security. When using AES method, it may restrictively not be registration. For routers with power saving function, it is recommended to deactivate the power saving function.

## ● How to use


1) Change the IP CAMERA item to ON in the setting screen of the CURADLE main unit. [Default: OFF]

It takes about 30 to 60 seconds for the camera to receive Wi-Fi signal. You will see an announcement when it works normally.

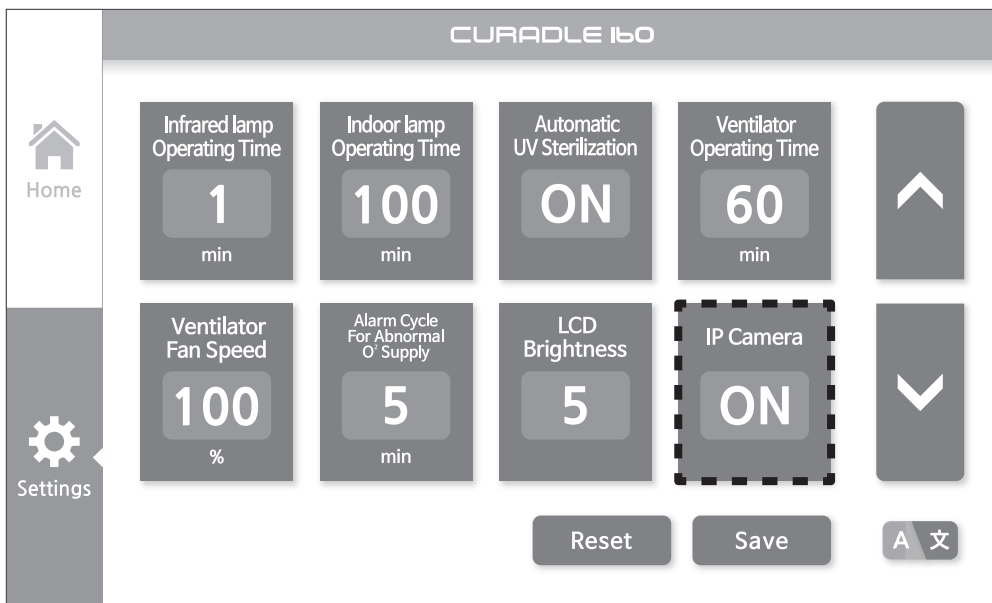


2) After opening the application, please proceed with membership. (Registration is required for the first connection)


※ It is recommended to register your email for sign up. If you register with your mobile number, the text message may be blocked with spam.

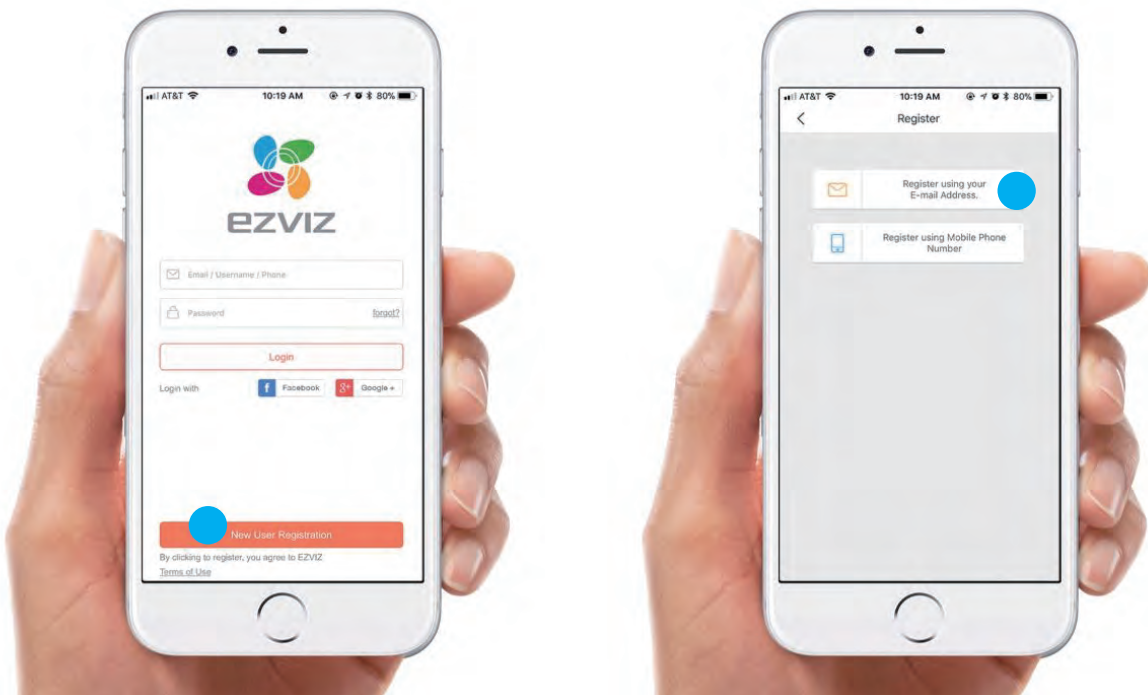

- 3) After the email address registration, Register your email, ID and Password to be logged into. The password should be set at least 6digits with a combination of letters and numbers.

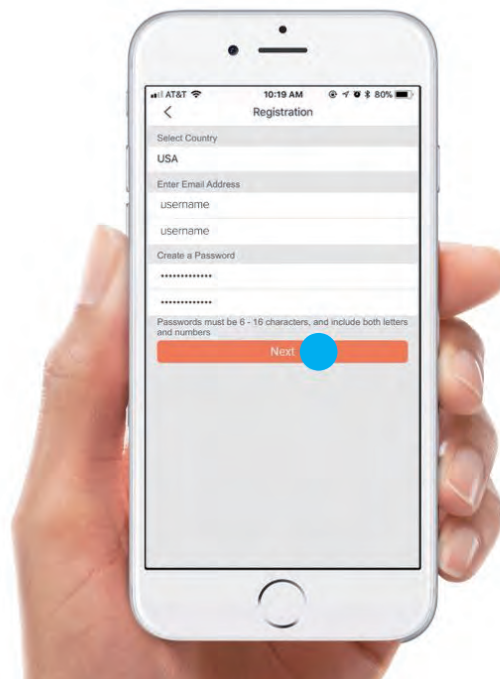

- 4) For security, a verification code will be sent to the registered email. When entering the code, the [NEXT] window will be activated and the registration will be done.

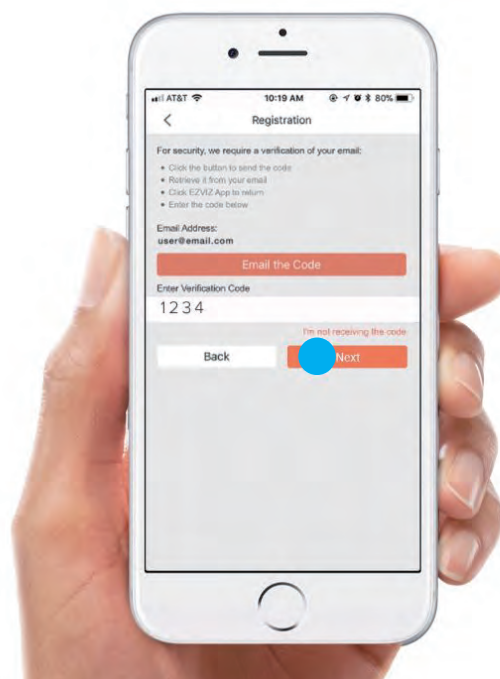


- 5) When membership registration is completed, click the [+] on the upper right.

※ **Caution**

After installing the App, you need to check whether the smartphone is connected to the Wi-Fi name you want to use when registering the device (camera).





6) If you are connected to the device installation screen, please insert the camera serial number. The serial number is attached on the front of the product. When entering your serial number, a screen will display as shown in the picture. Then please press the [Connect to Network] button.

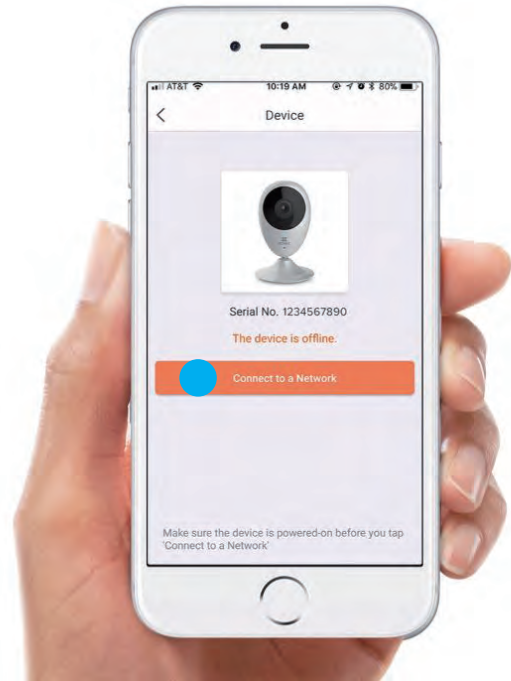


7) After checking the camera connection, please enter the Wi-Fi password to proceed with the next connection.

(It will be set to the Wi-Fi connected to the current mobile device. After entering the password, the Wi-Fi will be recognized to the camera. The Wi-Fi connected to the camera and the smartphone should be the same)


When appearing the screen for entering the verification number, please insert the number attached in front of the product body.

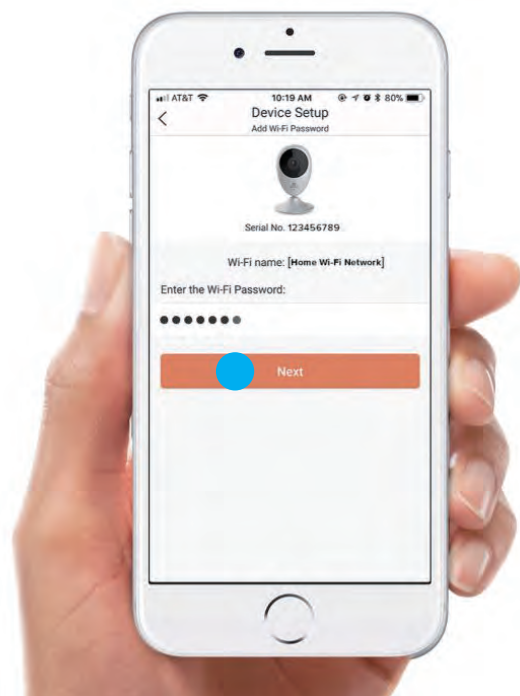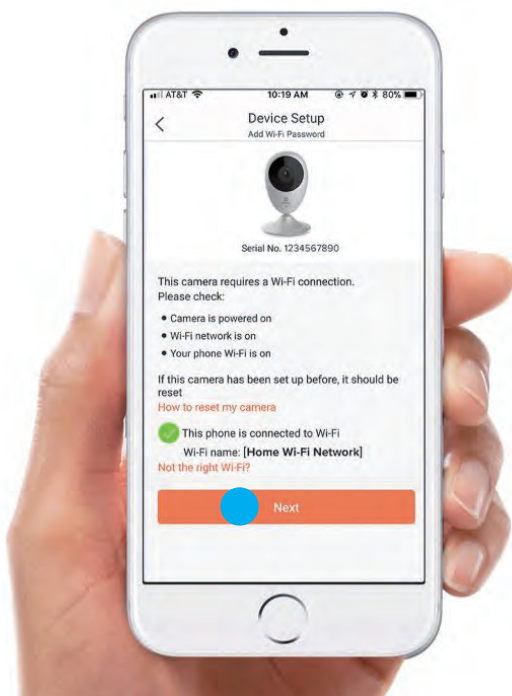

8) Keep the mobile phone close to the product. The connection will be proceeded automatically as shown in the picture and the IP camera installation will be completed.

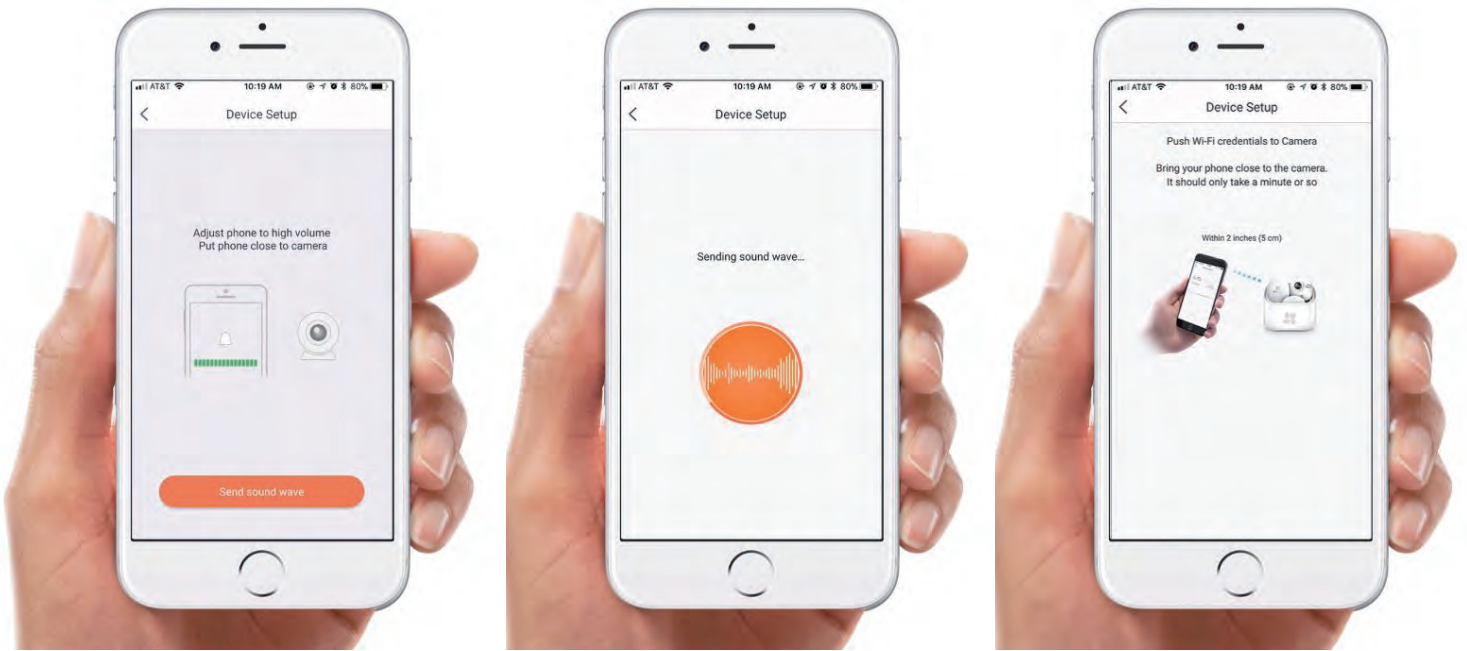

9) You can set your time zone and date format(for example, Korean time, UTC +09:00). When pressing the “View Camera”, you can play the real-time screen.

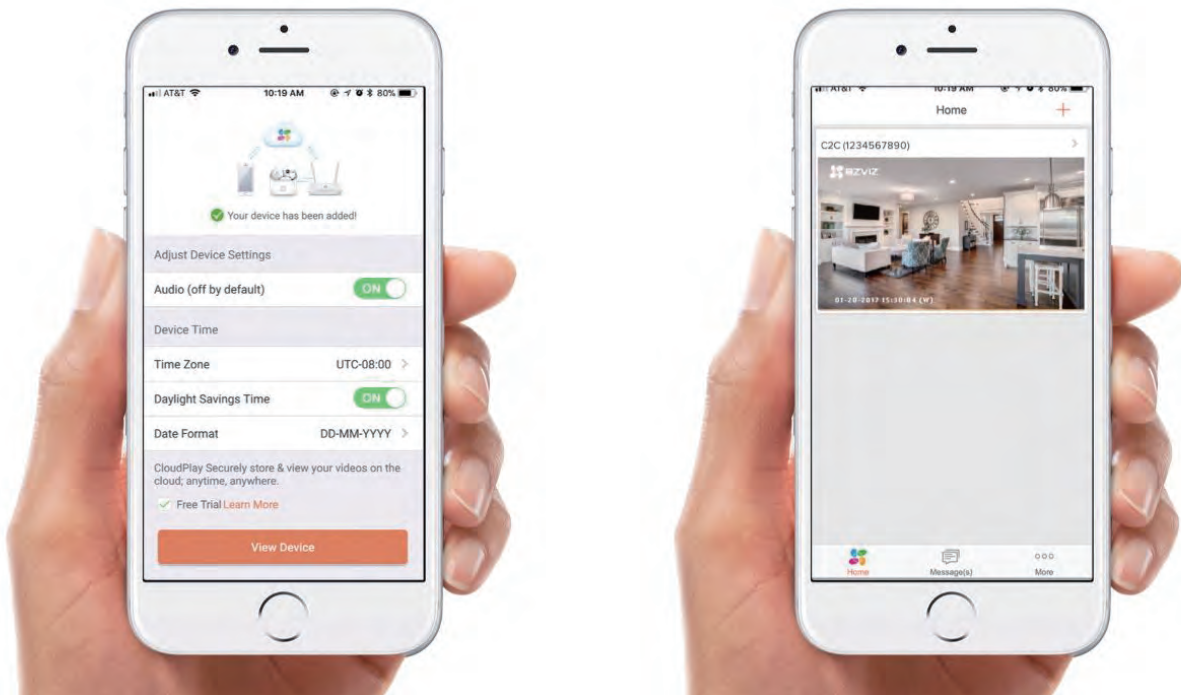

## ● Setup guide

**Call** : Talk and listen in two-way voice

**Snapshot** : Take a photo on your smartphone

**Recording** : Short time recording is possible by mounting SD memory cards to the camera separately.

**Video quality** : Basic, high resolution can be selected

**Microphone** : If you press and hold, the camera sends the voice. If you do not press the button, you can hear the camera voice from the mobile phone.


**Advanced search function** : you can search the detailed recording by time when you press the recorded part with both hands and tap it outside.

## ● Termination notice

When you stop using the IP camera, please make sure to press the “Exit” button by clicking the icon of the picture. If you don't press the exit button, your phone's battery consumption will be higher and data charges may incur.

## ※ Caution

If you want to connect to another account, you cannot connect to another account unless you delete your existing account in the device. Only one account per a camera can be registered.

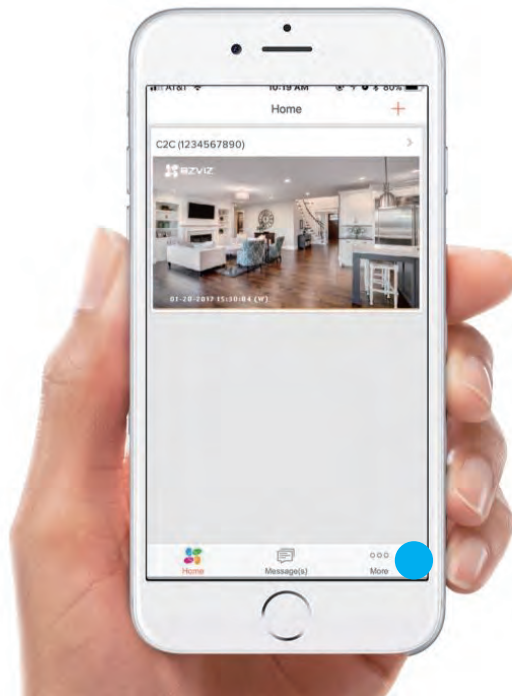

## ● Q&A

- ▷ Viewing on the internet via a computer.
  - ▶ In the 'www.hicloudcam.com' site, you can access the account using the registered ID and password.
  
- ▷ How to delete a device(Camera) from the EZVIZ App.
  - ▶ Select the camera video and click the setup button on the top right → click the add button → click the device-delete button.
  
- ▷ How to check your EZVIZ App account.
  - ▶ After opening the App, the bottom right in the start-up screen – Add – Account management.
  
- ▷ How to access EZVIZ App with another account?
  - ▶ After opening the App, the bottom right in the initial screen – Add – Log out Access with a new account
  
- ▷ Can I share my camera images with others?
  - ▶ If you use the registered ID and password together with others, you can share the video at the same time. However, as the camera serial number is required when installing the App, you should inform both the serial number and the account.
  
- ▷ All has been installed in the normal way, but it can't be connected.
  - ▶ When using a standard Wi-Fi device, it works normally. Sometimes, there may be a problem with the setting due to the characteristics of the Wi-Fi device or smartphone. If possible, please test the i-Fi device or smartphone with another device.
  
- ▷ Network connection failure. The solution is?
  - ▶ Please try again after resetting the camera(initialization).(Refer to page 7)


● **How to reset IP camera**  
**(Unlock the upper surface maintenance part)**

If you want to return the setting value, etc. to the factory condition, you can reset it in the machine maintenance part.

- ▶ Press the power button to turn off the power and disconnect the power cord from the outlet.

**⚠ Be sure to disconnect the power cord of the machine from the power outlet.**

- ▶ Turn both locking levers on the top side of the machine by 90 degrees using the rear side of the wrench included in the product. The maintenance part is unlocked.

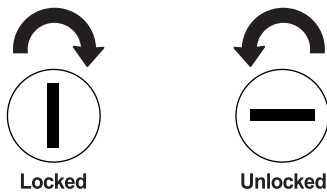

- ▶ You can reset the IP camera after lifting the top cover to remove it.
- ▶ When you look at the maintenance part from the top, the part shown in the upper left, figure is the IP camera. Press the reset button for 2 seconds using a pointed object such as a ballpoint pen in the reset groove on the back of the camera. If you hear a beep, the reset is complete.
- ▶ When replacement is complete, reassemble in the reverse order of removal.

