

# AUTOMATE | E6 ARC

Part #: MTACRF35-6-240V

Description: Electronic limit - Tubular AC motor

## FEATURES

- Leveling control
- Simple limit setting and adjustment
- Favourite position
- ARC protocol, 2-way RF communication and simplified programming
- "Slim Head" design minimizes light gap
- Low Noise Operation

## TECHNOLOGIES



ELECTRONIC  
LIMIT



LEVELING  
CONTROL




FAVORITE  
POSITION



433 MHz  
BI-DIRECTIONAL



## DIMENSIONS

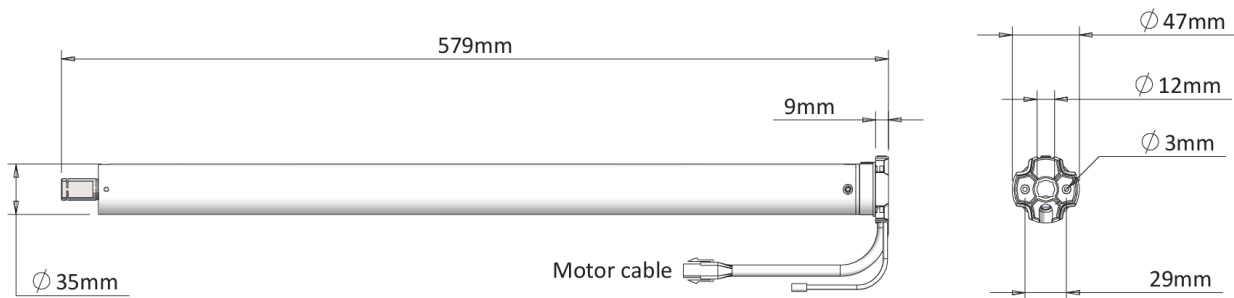

## SPECIFICATIONS

<b>Voltage</b>	220 - 240V AC	<b>IP Rating</b>	IP44
<b>Torque</b>	6.0 Nm	<b>Limit Switch Type</b>	Electronic
<b>Max Run Time</b>	4 Min	<b>Amps</b>	0.67 A
<b>Speed</b>	28 RPM	<b>Temp Working Range</b>	0°C to 60°C (32°F to 140°F)
<b>Radio Frequency</b>	433.92 MHz	<b>Insulation Class</b>	I.CL.A
<b>RF Modulation</b>	FSK	<b>Sound Rating</b>	~46dB




Leading innovator of precision hardware and automated shade solutions.  
AUSTRALIA | USA | EUROPE [rolleseeacmeda.com](http://rolleseeacmeda.com)

© 2016 Rollease Acmeda Group

 **ROLLESEE  
ACMEDA**  
PRECISION IN MOTION

## APPLICATIONS



ROLLER  
SHADES




ROMAN  
SHADES

## COMPATIBLE SYSTEMS

- Skyline SL20 / 50mm tube
- SS40
- S45

## ACCESSORIES

### EXTENSION CABLES



Automate UNIVERSAL in-line connector tail - 2.5m  
Part #: RB24-9104-069025

Automate UNIVERSAL in-line connector tail - 5m  
Part #: RB24-9104-069050

### REMOTES



Paradigm 1CH ARC Remote  
Part #: MTRF-REM-1C

Paradigm 15CH ARC Remote  
Part #: MTRF-REM-15

### CROWN AND DRIVES



Crown and Drive Set 35mm motor to S45  
Part #: MTCRDR-35-S45

Crown & Drive Set 35mm motor to 2.0" Rib Rollease tube  
Part #: MTCRDR-35-2

Somfy LT50 Drive Adaptor  
Part#: MTDRA-LT50

### BRACKET ADAPTORS



M40 H/D Universal Disc Adapter S45 White  
Part #: RB40-1402-069400

Motor Adapter 25/28mm to SKY 6Nm v2 White  
Part #: MTAD-25-28-SLV2W