




1. Unscrew top bracket that holds the adhesive and remove. Feed cable through the stand.




2. Peel off the paper from the 3M Command strip.




3. Place the bracket in the center of the tablet and press down and hold for 20 seconds.

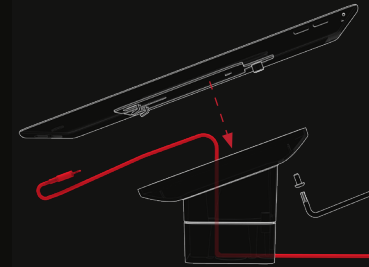


4. Re-attach top bracket and secure with the lock screw.

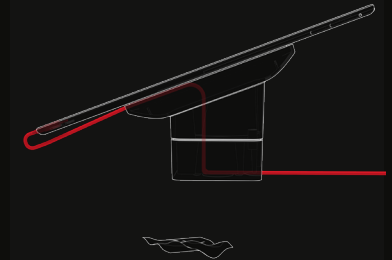

5. Wipe base of stand and your mounting surface with alcohol wipes provided and let dry.

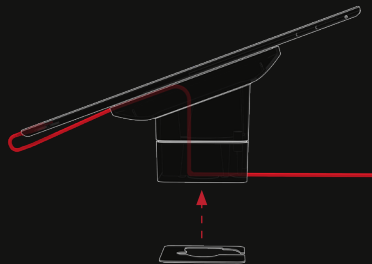

6. Stick 3M adhesive to the base of stand and firmly place down on your mounting surface.

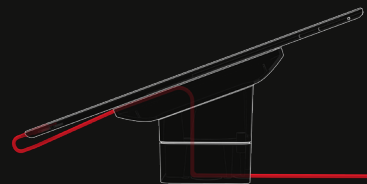


7. Let the stand sit for 24 hours before use.




Optional Position Lock

Rotate stand 45 degrees so cable hole is on the left, then screw in lock screw as shown. This will lock the rotation for a fixed option.



Optional Rotation Lock


To change your stand to landscape or portrait, unscrew to remove case and place back on in desired angle.




1. Unscrew the top bracket with Allen key. Then unscrew screws to lift the case off the stand.




2. Follow the above locations to line up your surface mounting and cable feed.




3. Drill pilot holes to assist with screw base mounting. Refer to the mounting guide for assistance.



4. If you are running your charging cable through the surface, ensure to drill a larger hole to feed cable through.

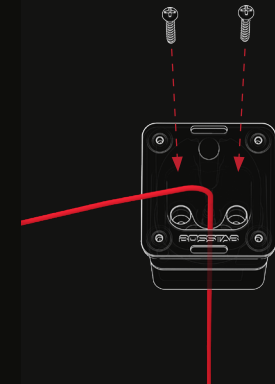


5. With the cable channel facing out the back of the stand, screw down your stand using the wood screws provided.




6. Place case back on the stand and screw back in the 4 screws.



7. Peel off the paper from the 3M Command strip.



8. Place the bracket in the center of the tablet and press down and hold for 20 seconds.



9. Re-attach top bracket and secure with the lock screw. Plug in the charger cable.

For more information or to contact our sales & customer support team please click on the links below:

[Contact Us](#)

[Warranty & Returns](#)

[Shipping](#)