

ARGON AUDIO



Argon Audio is a Danish audio company founded 20 years ago with a clear goal: to deliver high quality products at value-for-money prices. Today, all Argon Audio products are designed and engineered in Denmark and carefully crafted to deliver a level of performance that punches way above their respective price classes – and always with a Scandinavian design aesthetic.

Congratulations with your FENRIS speakers, may they bring you years of enjoyment.

Table of Contents

1 Introduction	page 2
1.1 Contents of the box	page 2
1.2 Safety Instructions	page 3
2 Usage, controls and connections	page 4
2.1 Overview of the back panel	page 4
2.2 Overview of the remote control	page 5
3 Quick Start	page 6
4 Special Functions and Features	page 6-7
5 Specifications	page 7

1.1 Contents of the box:

- Argon Audio FENRIS Speakers
- Front covers with magnet mount
- Quick Start Guide
- Power cable
- Speaker cable (3 meters)
- Remote control w/batteries

We recommend that you keep the original box and packing material for future transportation.

We also recommend that you keep this User Manual for future use.

1.2 Safety Instructions



Unplug this product from the wall outlet before cleaning. Do not use this product near water or moisture. Do not spill liquids on the product. Clean only with a dry cloth.

Place the unit on a solid surface.

Do not put it in a closed bookcase or a cabinet that may keep air from flowing through its ventilation openings.

Do not install near any heat sources, such as radiators, heat registers, stoves or other appliances that produce heat.

Protect the power cord from being walked on or pinched, particularly at plugs and the point where they exit from the product.

During Lightning storms, unplug the product from the power source or if unused for long periods of time. This will prevent lightning and power-line surge damage to the product.

Do not attempt to service this product yourself. Opening or removing covers may expose you to dangerous voltages or other hazards. Please contact the manufacturer to be referred to an authorized service center near you.

Do not overload wall outlets, extension cords, or integral power circuits as this can result in a risk of fire or electric shock.

Never push any object through the product openings, as this can result in fire, electric shock or damage.

Use proper power sources. Plug the product into a proper power source, as described in the operating instructions or as marked on the product.



If there is a Lightning flash with an arrowhead on product, it's intended to alert the User of the presence of un-insulated "dangerous voltage" within the product, that might be of sufficient magnitude to constitute a risk of electric shock to persons.




If there is an Exclamation point on the product, it's intended to alert the User that there is important operating and maintenance (servicing) information in the User manual.



If there is a double rectangular symbol on the product, it means that the product is double insulated. Earth connection is not required.

2. Usage, controls and connections

2.1 Overview of the back panel (inputs and connections)

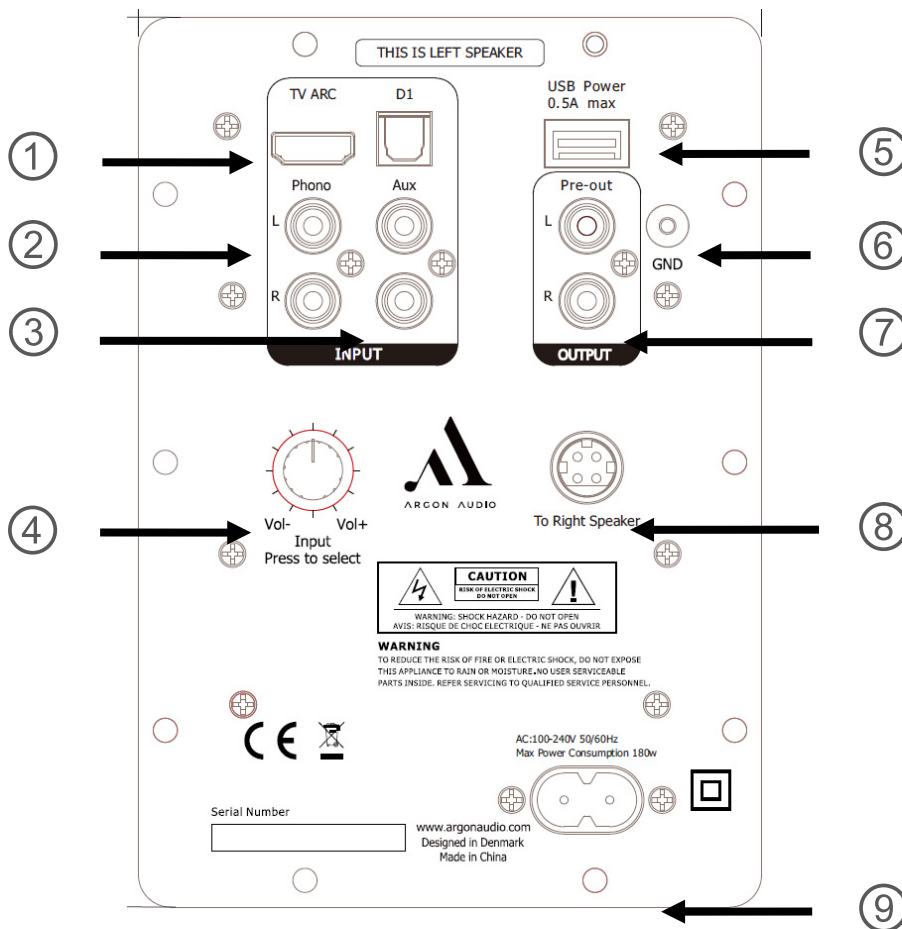

1. TV ARC: for TV sound from any TV that supports HDMI ARC (2.0 PCM only). To its right, D1: optical input for digital sources (max 24 bit/48 kHz)
2. Phono: line in for turntables only (MM)
Connect a turntable, remember to connect "Ground" (7) as well
3. Aux: line in for analogue sources
Connect any analogue audio source with Left/Right cable
4. Volume/input knob
5. USB power: charge or power any 5V/0.5A USB device
6. Ground (GND): connection for turntable grounding
7. Pre-out: for subwoofer connection etc.
8. Speaker output: connect to the passive speaker
9. Power Plug: insert the power cable and connect to an electric outlet

2.2 Overview of the remote control



1. Power ON/OFF
Press to turn power on or off
2. Input selector
Press to choose your desired input source
Press and hold BT to pair a new Bluetooth device or remove all paired devices if already paired
3. Volume up/down
Press to adjust volume up or down
4. Play/pause in Bluetooth mode
5. Skip track in Bluetooth mode
Press to skip track forward or backwards
6. Mute or un-mute the sound
Press to Mute or un-mute the sound

3. Quick start

1. Connect the speakers using the included speaker cable.
2. Connect the power cord into an electric outlet and into the back of the left speaker (which has the amplifier). The LED light on the loudspeaker will turn on.
3. To pair your Bluetooth device, turn on the speakers and press and hold 'BT' on your remote for about 3 seconds, until the LED starts blinking. Your speakers are now in pairing mode. Activate Bluetooth on your playback device and scan for devices. Your speaker will show up as "Argon Audio FENRIS". Press "pair" and you're connected. The LED light on the speaker will change to solid blue. You're now ready to start listening to music!
4. Besides Bluetooth, your FENRIS speakers have four more inputs: TV ARC, D1, AUX and Phono. FENRIS will automatically switch between the inputs, but you can also use the included remote control to select your wished input.
5. When using the TV ARC input, you might need to set the digital sound output on your TV to PCM. Consult your TV manual to see how.
6. When connecting a turntable to the Phono input on the FENRIS speaker, remember to also connect the ground wire from the turntable to the metal GND screw (if applicable).
7. If you have an active subwoofer, connect it to the FENRIS speaker's Pre-out, using an RCA cable and then connect the cable to your subwoofer.
8. We recommend a running-in time of your FENRIS speakers of approximately 15-20 hours at normal listening level before you decide on the final positioning of the speakers.

4. Special functions and features

APU (Auto Power Up)

When the FENRIS speakers receive input from any connected source (except Phono), they will automatically power on (if powered off) and switch to the right input. This is called Auto Power Up. Note: this will not happen if the speakers are already powered on and playing from another source.

You can disable Auto Power Up (APU) if needed: simply press and hold the power button on remote control for 5 seconds while the speakers are on. The speakers will now power off with APU disabled. This will also disable automatic power off, meaning you need to turn off your speakers manually.

To enable APU again, simply press and hold the power button for 5 seconds again when the speaker is powered off.

Bluetooth unpairing

You can always press and hold the 'BT' button to remove all Bluetooth connections. Please note that Bluetooth pairing is only available when the Bluetooth-input is selected.

LED dimming

To enable dimming of the LED on the front of the speaker, power on the speaker and hold the D1 button on the remote for 5 seconds. The LED will now turn off after 5 seconds after switching inputs. To disable again, press and hold D1 for 5 seconds again.

5. Specifications

- 2-way active speaker system with built-in 4 channel Class-D Amplifier
- Bass reflex system
- Output power: 2 x 50 watts (woofers), 2 x 25 watts (treble)
- Frequency range:
 - FENRIS A4: 52-22.000 Hz (\pm 6dB)
 - FENRIS A5: 47-22.000 Hz (\pm 6dB)
 - FENRIS A55: 38-22.000 Hz (\pm 6dB)
- Tweeter: 0,75" soft dome with neodymium magnet
- Bass/midrange driver:
 - FENRIS A4: 4" Bass /midrange driver
 - FENRIS A5: 5,25" Bass/midrange driver
 - FENRIS A55: 2x5,25" Bass/midrange driver
- Energy usage in standby: <0,5 watts
- **Inputs** : TV ARC, optical digital, L/R analog stereo-in (RCA), phono (MM), wireless Bluetooth 5.0
- **Outputs**: Pre-out, 5V/0.5A USB-charge
- Auto power on/off on inputs incl. Bluetooth, (notice: Auto power on does not work on turntable input)
- Magnetic front grille
- Dimensions:
 - FENRIS A4: 14 x 24 x 22 cm (WxHxD)
 - FENRIS A5: 17 x 28 x 22 cm (WxHxD)
 - FENRIS A55: 17 x 88 x 27 cm (WxHxD)
- Weight:
 - FENRIS A4: 5.5 kg (set)
 - FENRIS A5: 7.2 kg (set)
 - FENRIS A55: 25.2 kg (set)
- Colors:
 - Matte black with bronze trim rings
 - Matte white with silver trim rings
 - Ash with gold trim rings