
# Quick Installation Guide



Smoke Detector Cam

## 1.Packing List

Open the package, then make sure the Smoke Detector Cam is intact, and with all the below accessories.

Installation Manual



Smoke Detector Cam (Note: Not support smoking detector function)



Please refer to the installation pictures in Battery Cam App, and read this manual and keep it handy during installation.



10000 mAh Battery Working time: About 24h



Adaptor with Micro USB Chaging Wire Charge the battery





Remote Contrl Device Power on/ off the camera

Important reminder card

Important information alerts

Adhesive Tape









Philips big flathead self-drilling screw (4) Use 2 of these to attach the supplied bracket to your on the wall.




Plastic expansion (4) Knock the plastic expansion into the hole.



Grab the base and housing of the device and rotate counterclockwise



### Step 2 – Power on the device




# Step 3 – Prepare for configuration

Micro USB Charge Port ( INPUT )

You must configure the device before you can proceed to the next step.


## Product Detail

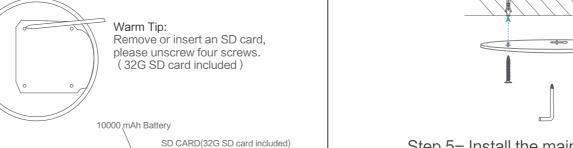



# Step 4- Fixed base


RESET



### Step 5- Install the main body

Tighten the screws and fix the base.

Connect the main body and rotating clockwise to the base, fixing the foundation of the machine, complete the installation.




# 1. How to configure the camera?

Please turn on the power and wait for 1 minute.

- 1. Please fully charge battery before using the camera.(Also can be connected with wire)
- 2). Turn on the device and press once the remote control "ON" button. Waiting for 1 minute. the red indicator light willblink twice at a time. The camera is wating to be connected.
- 3. If the red light does not blink twice at a time after turning on, please reset the camera.
- 4. How to reset the camera?

Please press and hold the "reset" vellow button for 5 seconds or press andhold the remote control "OFF" button for 5 seconds. Waiting for 1 minute, the red indicator light will blink twice

Then



## Wi-Fi Router

2.Preparation

· Device can only connect to 2.4Ghz Wi-Fi router

Please prepare the below stuff before you use it.


One smartphone or tablet PC(Mac or Windows PC is not acceptable)


with IOS 8.0 or Android 4.4 system(higher version system is acceptable)


- Distance between the router and the device should be within 3 meters during configuration.
- Make sure turn on the DHCP of router, and MAC address should be off.
- · Please don't use special character such as Chinese,
- symbol to name the WiFi. · Please don't use special character such as Chinese,
- symbol as the password, the WiFi and Wi-Fi password can not be blank.


2.4G Wi-Fi


Wi-Fi Router

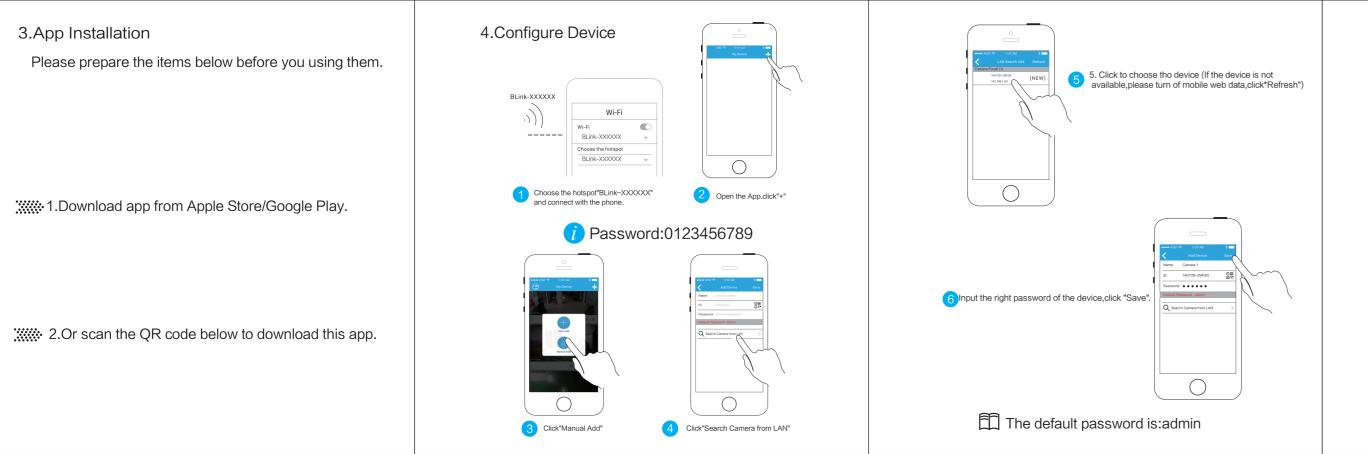


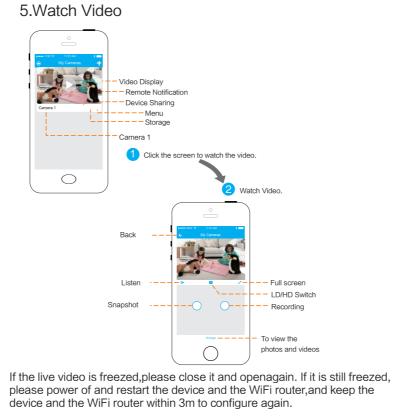

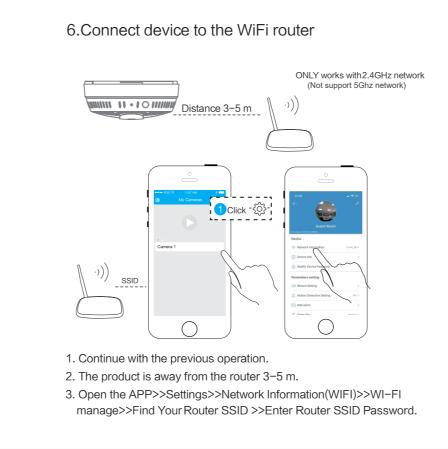

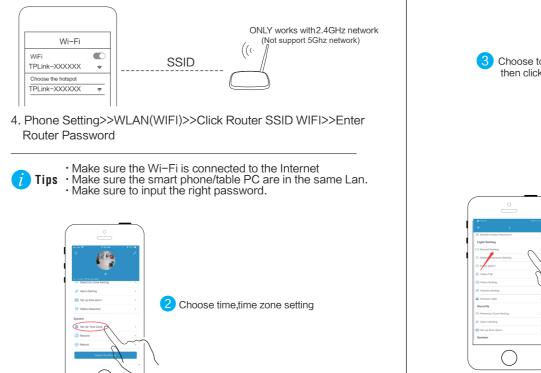









### ·Q:How many users can watch the video the same time? > 5 persons maximum. · Q:Whether device supports ONVIF? > Yes,it is standard. O:How many cameras does the App holds at the same time? > To make sure the App works well please do not connect over 10 cameras. ·Q:Can I record the live video into my phone? > Yes, the manually record will saved into your phone. But the auto record will saved into the SD card. ·Q:Whether device supports SD video recording? > Yes,up to 32G Micro-SD card. ·Q:How long does my SD card can record? > If your camera is running Full Time recording one 32G SD card can record about 4 days. If the SD card is no space for new video, it will erase the oldest video to save the newest. ·Q:What is the format of the video recording on the Micro-SD > AVI,H.264 and most of the main media player format. ·Q:How to use smart phone to watch the SD card recording? > Press the APP, press the local recording->"SD", then you can watch

the video recording.

· Q:Why system prompt that equipment is offine after added?

> Please click software reconnect or check whether the equipment

·O:Why stuck and time-lag situation happens sometimes

> Please check your network connection or set up video quality to

device will be reset to the factory default setting in about 1 minute.

find "Modify Device Password". The default password is "admin".

> Please make sure that the distance between the device and the

WIFI router is within 3 meters and there are no walls in the middle.

> If you bought the device before 2019, please use the old version.

· Q:What can I do if I forgot the equipment password? > Press (RST/SET]button on the unit and hold 5 seconds at least,the

> Open the App and click the gear icon, then you can

·Q:Why can't it connect to WIFI or is it unstable?

·Q:Why can't it connect to a dual-band router?

> Please choose 2.4Ghz WIFI for the connection.

Our new app is just for the device on or after 2019.

· Q:Why can't it configure with the app?

you, you can turn it off on the APP manually.

when the device is energized?

power supply and the network connection is OK.

when watching the video?

"low" pattern under advanced setting.

·Q:How do I change the password?

# About the User Manual: The user manual is used as a guide. The photos graphics charts and illustrations provided in the User Manual are only used for explanation and interpretation, which may be different from specfic products please refer to the real object. The User Manual may be updated because of the products version upgrade ·O:Why there is a red indicator light under the ventilation hole or other requirements, if you need the latest version of the user manual, please contact customer service. > The red light indicates a normal operation of the device. If it bothers