


ILLUMINATED PLAQUES—TRANSFORMERS MUST BE INSTALLED BY A QUALIFIED ELECTRICIAN

WALL FOR INSTALLATION MUST BE FLAT/LEVEL

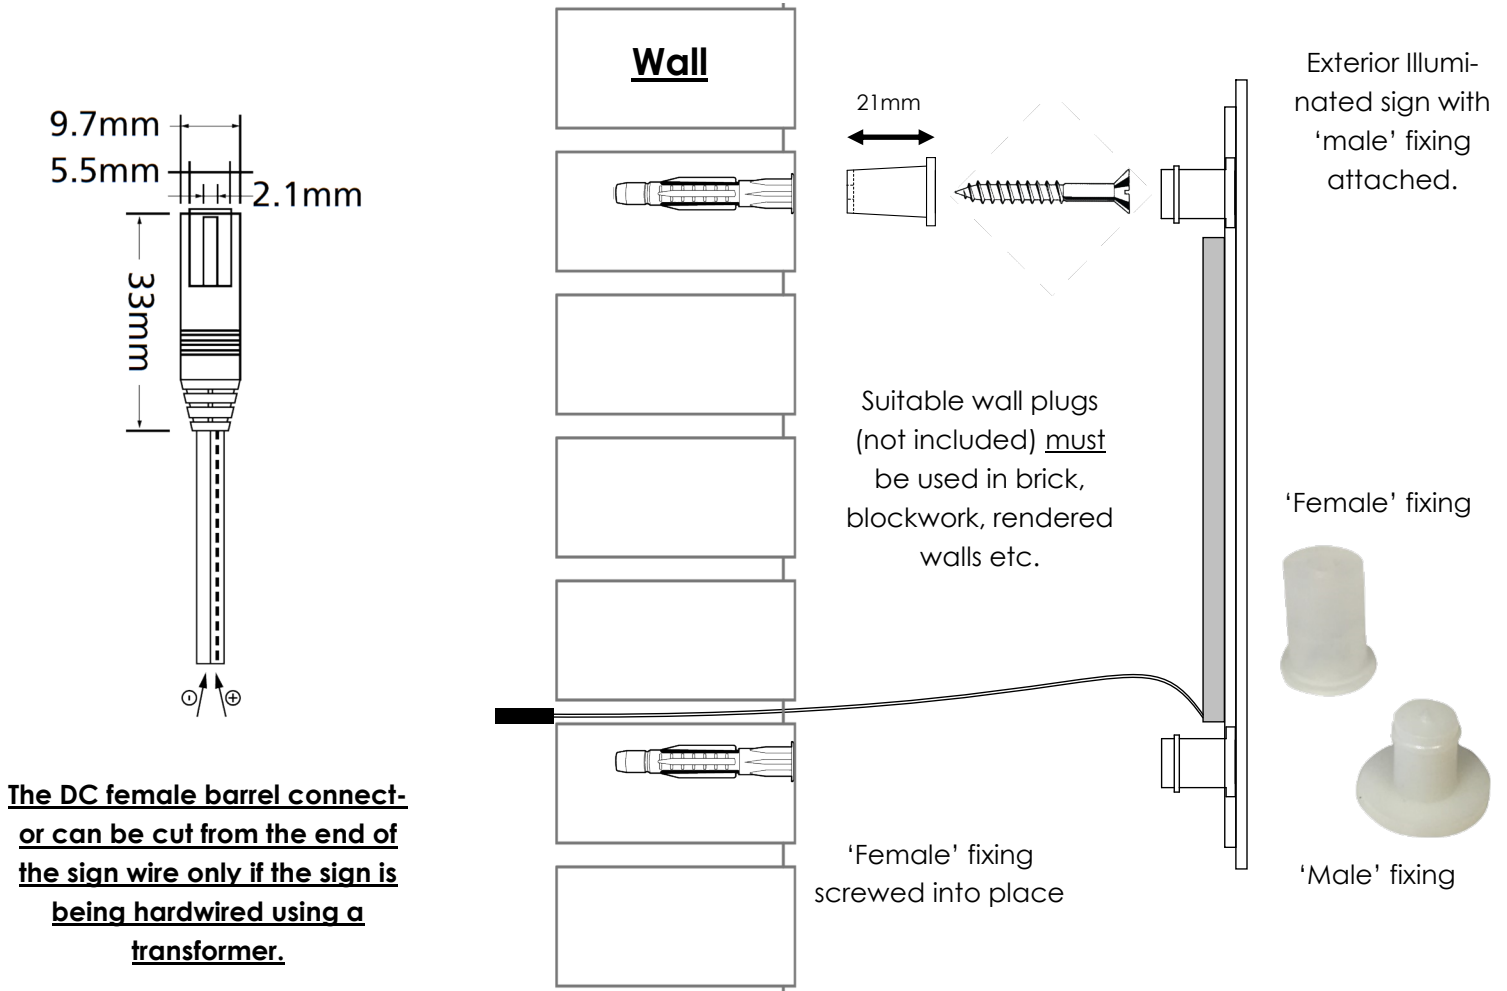

Using a scrap sheet of cardboard or paper and a soft under surface, push your sign (fixing points facing down) into the paper to form indents. Or carefully measure the holes centres from the small points on the male fixings.

Use your paper template to transfer the hole centres for the fixing points onto the level wall, all fixing points must be used and accurate.

Drill suitable hole and insert wall plug (wall plug not included)

Using stainless steel screws, attach the 'female' plastic fixings into place on the wall (use white acrylic spacers as required to obtain the same depth as the brushed steel stand off corner bolt).

DO NOT OVERTIGHTEN AND DAMAGE FEMALE FIXINGS.

AN ELECTRIC DRILL OR SCREWDRIVER IS NOT RECOMMENDED

Align the fixings and push the sign into place, listen for the click.

It is essential these instructions for installation are followed, deviation from them will result in any warranty being void.

Any power transformers not purchased from KREATIV-DESIGN would not be covered under any warranty.

TRANSFORMERS MUST BE INSTALLED BY A QUALIFIED ELECTRICIAN

ALL POWER PLUGS/TRANSFORMERS AND CONNECTIONS MUST BE INSTALLED INDOORS AND PROTECTED FROM WATER, THEY ARE NOT IP RATED.

