

# MEGA<sup>LITE</sup>

## HAZE<sup>2</sup>ENGINE™



### **Product Description:**

The Haze 2 Engine offers versatile functionality with its adjustable output direction feature, allowing you to create various haze effects tailored to different events. With multiple means of control including a convenient 2 button remote which gives you complete flexibility in how you control your unit. These features along with the unit's quiet mode make the Haze 2 Engine an extremely versatile unit.

### **Adjustable Direction**

The Haze 2 Engine has two adjustable gates that can be used to change the direction the haze flows out of the unit creating different effects for different events.

### **Wireless Control**

The Haze 2 Engine can also be controlled via 2 button remote control giving you more flexibility in how you control this unit.

### **Quiet Mode**

The unit is equipped with a quiet mode engineered for theatrical and intimate venues, ensuring an immersive experience for both performers and audiences alike.

## Mechanical Specifications

---

Housing:	Sheet Metal
Mounting System:	Rubber feet for Floor Mounting
Power Connection:	Panel: Seetronics SAC3MPX Panel Mount Cable: Seetronics SAC3FX to Nema 5/15
Signal Connection:	3 and 5 Pin XLR In and Out
Output Direction:	Forward and Upwards gates
Tank Size:	42oz
Wireless Controller:	Wireless handheld on/off controller
Manual Engage:	Yes

## Electrical Specifications

---

Power Input:	110V 60hz
Fuse:	F10 250V
Heat Source Watts:	900W
Power Consumption:	927 Watts 8 Amps @110V
Fan Speed:	Controlled Via Display and DMX
Haze Output:	Controlled Via Display and DMX
Haze Volume:	9,000 CuFT/Min
Heat Up Time:	1 min 40 sec from cold start


## Control System

---

Operating Mode:	DMX, Manual Settings Via Display, Wireless Remote on/off controller, Manual Engage Button
Protocol:	DMX 512
Channel Modes:	2 Channel Mode Volume, Fan Speed
DMX-512:	Yes

## Size and Weight

---

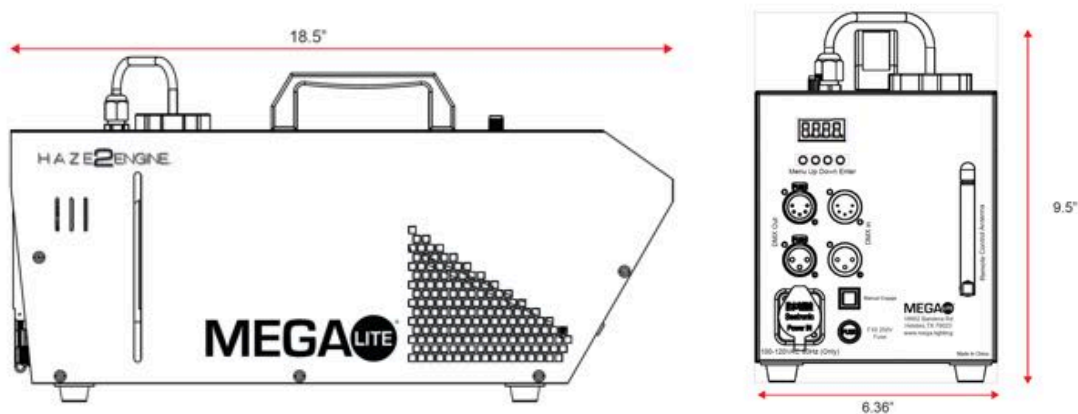

Fixture Size:  
Fixture Weight:  
Packaged Size:  
Packaged Weight:

18.5" X 6.36" X 9.5"  
12lb  
21.5" X 9" X 10.75"  
14lb

## Included Items

---

2002: Haze 2 Engine  
2002-REM: Haze 2 Engine Remote

## Accessories:

---

Part Number: Haze 2 Engine Road Case

## Customer Service

---

MEGA-Lite has a customer support line to provide set-up help and answer any questions should you encounter a problem. Please visit our website for any other related technical documents. For service-related issues, please contact our service department at [service@mega.lighting](mailto:service@mega.lighting)

Operating Hours: Monday - Friday 9AM - 6PM CST  
Phone: (210) 684-2600  
Email: [Sales@mega.lighting](mailto:Sales@mega.lighting)

# MEGA LITE<sup>®</sup>

18662 Bandera Rd  
Helotes, TX 78023  
Phone (210)684-2600 / Fax (210)855-6279  
[www.mega.lighting](http://www.mega.lighting) / [info@mega.lighting](mailto:info@mega.lighting)