


# Srhythm

Find the rhythm of your soul

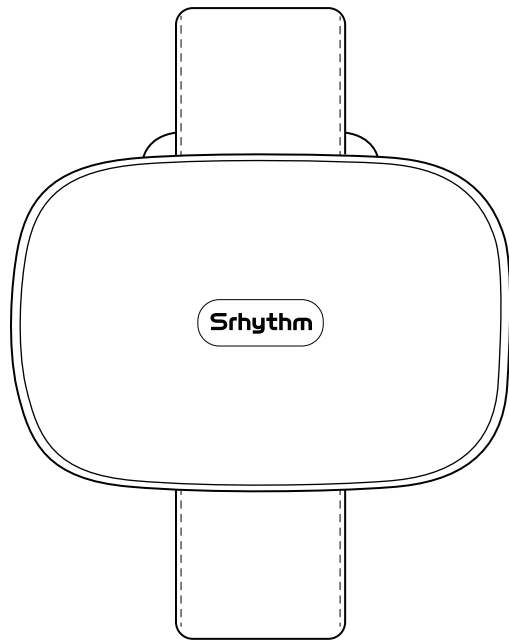

## Wireless Speaker K1

user manual

# User Manual

## Safety Instructions

1. Before using the speaker, please read the manual carefully and keep it for future references.
2. Use original or certified cables.
3. Don't disassemble.
4. Avoid dropping.
5. Avoid extreme temperatures. Unplug this apparatus during lightning storms or when unused for long periods of time.
6. Do not expose products containing batteries to excessive heat (e.g. from storage in direct sunlight, fire or the like).
7. Keep the product away from fire and heat sources. Do not place naked flame sources, such as lighted candles, on or near the product.
8. Turn off speaker to save power when you do not use the speaker.


## Technical Specification

Product name	Srhythm K1
Modle	K1
Bluetooth version	5.3
Battery capacity	1200mAh
Charging time	About 2 hours (5V/1A)
Music play time	About 20 hours at 60% volume
Rated power	5Wrms
Bluetooth profile	HSP, A2DP, AVRCP
Bluetooth range	10m/33ft
Waterproof rating	IPX7
Net weight	178g/0.4lb
Dimensions(W*H*D)	102.0mm*79.0mm*36.0mm


# What's in the Box




Srhythm K1 Speaker\*1




Portable Carry Case\*1




Type-C Charging Cable\*1



3.5mm Audio Cable\*1






Wrist Extension Strap\*1



Srhythm Quick Start Guide\*1

# At a Glance

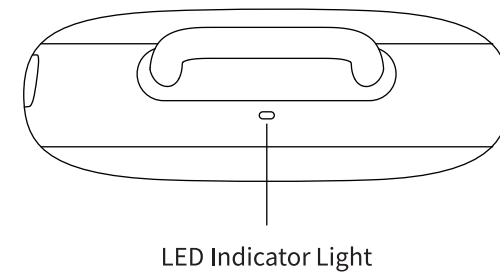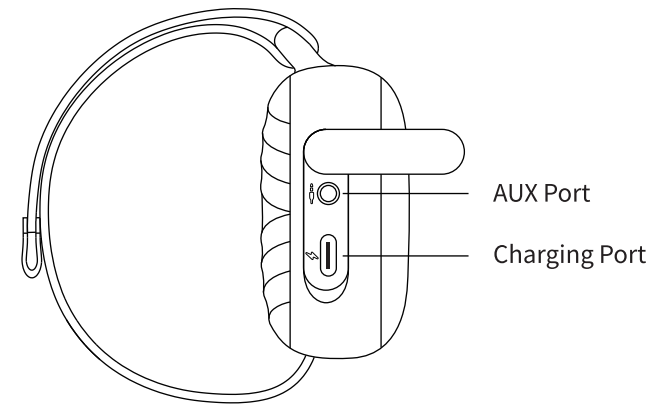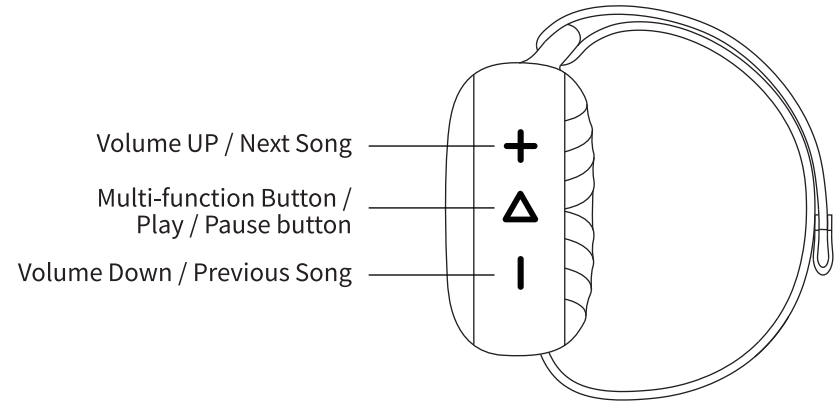

LED Indicator Light

# How to Use

## 1. Turn on / off

Press and hold the Multi-function Button for 3 seconds to turn on the Bluetooth speaker.

LED Indicator Light	Voice prompts
Blue light on 1s	Power On

Press and hold the Multi-function Button for 5 seconds to turn off the Bluetooth speaker.

LED Indicator Light	Voice prompts
Blue light flashes 2 times	Power Off

\*Srhythm K1 will automatically turn off after 10 minutes if no device is connected.

## 2. Pair with your device

Step 1: Turn on the Bluetooth speaker, then enter into pairing mode.

LED Indicator Light	Voice prompts
Blue light flashes	Pairing

Step 2: Keep the speaker and your mobile phone as close as possible during pairing process.

Step 3: Turn on the Bluetooth on your cell phone. Search for the Bluetooth speaker signal on your phone. Click on "Srhythm K1".

LED Indicator Light	Voice prompts
Blue light always on	Connected

## 3. Connect via Aux

Press and hold the Multi-function Button for 3 seconds to turn on the Bluetooth speaker.

LED Indicator Light	Voice prompts
Blue light on 1s	Power On

Connect the speaker via Aux.


LED Indicator Light	Voice prompts
White light always on	

\*AUX mode is unavailable when out of battery.





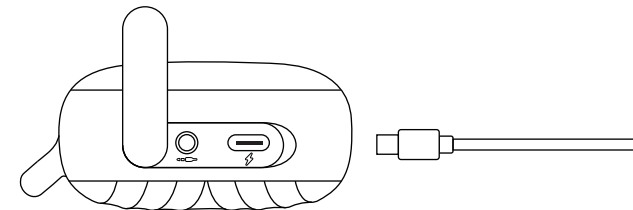


\*When using AUX mode, volume/play/pause control works on the Bluetooth speaker, but previous/next song control must be done from the connected device.

## 4. Charge the speaker


Please use original or certified cables to charge your speaker.



# Function Details

  3S	Turn on
  5S	Turn off
 ×1	Play / Pause
 ×1	Volume up
  2S	Next song
 ×1	Volume down
  2S	Previous song
   2S	Reset

# Product Dimension

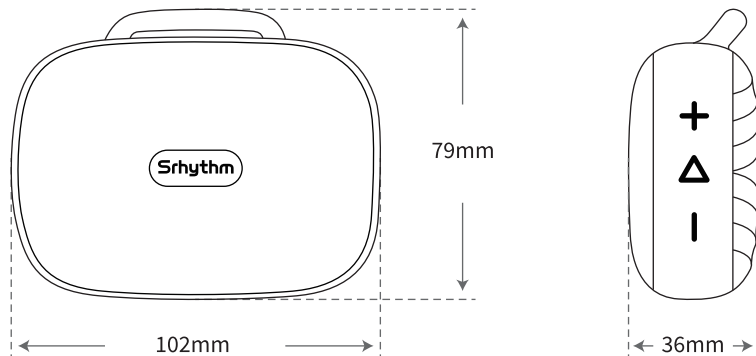

# FCC Caution

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

# IMPORTANT NOTE

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.