


Manganin Shunt Resistor

for High Precision Current Measurement

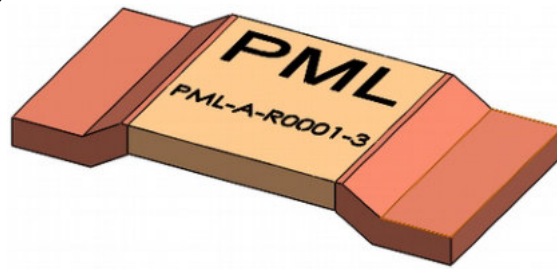

Description

The R1000-SMD-06 shunt resistor is a precision Cu-Mn resistance in the small size of a 2512 SMD component.


The shunt is designed for precision current measurement with high thermal stability in instruments, industrial, and automotive applications, typically including energy meters, ampere meters, power inverters, IGBT modules, and battery current monitoring. Thanks to its compact size it is ideally suited for high power applications on PCB substrates.

Characteristics

Parameter	Typical Value	Unit
Resistance	1000 (*)	μOhm
Accuracy of absolute resistance	5	%
Resistivity temperature coefficient	± 50	ppm/K
Operation temperature range	-50 ... 150	$^{\circ}\text{C}$
Continuous power rating	3	W
Inductance	<2	nH

(*) resistance values between $200\mu\text{Ohm}$ and 3mOhm on request

Geometry

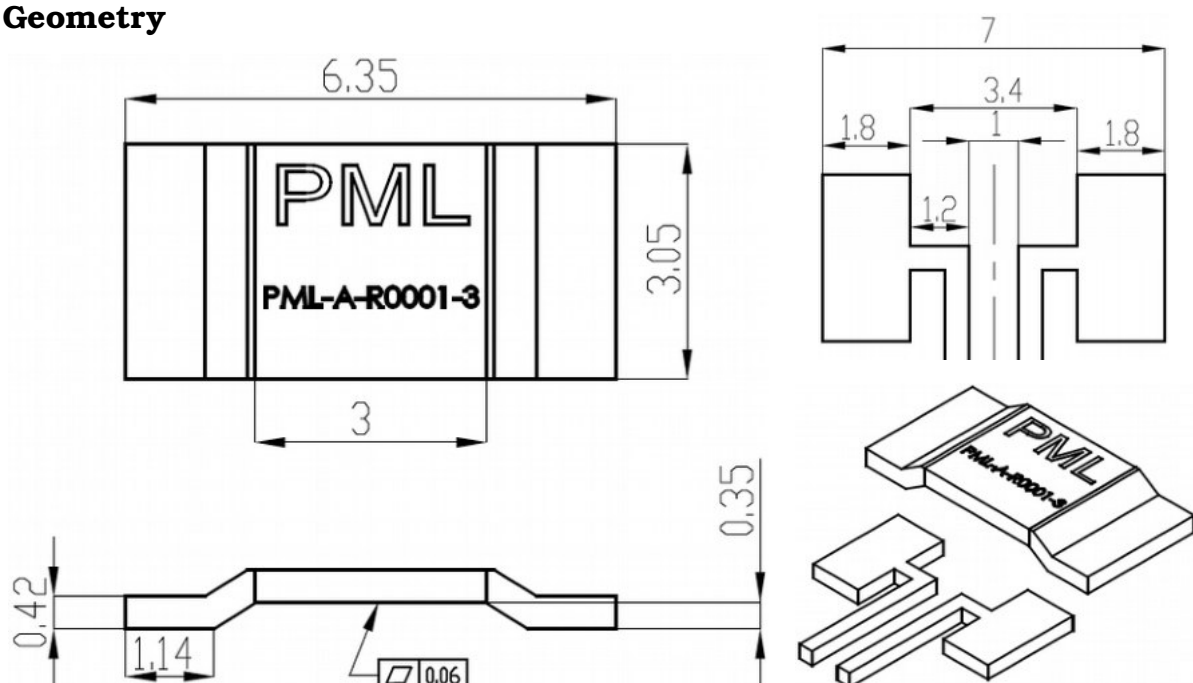

Please contact us at



maglab GmbH

Güterstrasse 141
CH-4053 Basel
Switzerland

+41 61 261 16 44
info@maglab.ch
www.maglab.ch



Permanent Magnets Ltd.

B-3, MIDC Industrial Area, Mira-gaon
Miraroad-East, Thane-401104, Maharashtra
India

+91 22 29 45 21 21
shuntinquiry@pml.in
www.pmlindia.com