

LED SHOE BOX FIXTURES

INSTALLATION-LED SHOE BOX FIXTURES

RL-SB-150W-CREE
RL-SB-200W-CREE
RL-SB-320W-CREE

Prior to Installation

Before installing light fixtures, read and understand all cautions, warnings, instructions, and product labels. Failure to do so could result in injury and/or void the warranty.

Important

Installation should be done by a qualified electrician.
Make sure power is OFF before installing or maintaining fixture.


Installation

Step 1. Before wiring, hang the light fixture in position on the pole, by the metal wire (see picture "A")


Step 2. Black wire is L (Live), White wire is N (Null line), Green wire is G (Ground line). Complete electrical connections by wire caps (by others)

Step 3. Push the hole of the mounting arm into the pole, tighten the attached hexagon screw (see picture "B" below), or if use mounting bracket, screw and tighten the mounting bracket onto the pole (see picture "C" below).


Step 4. After installation & wiring, seal all the holes with silicon glue.

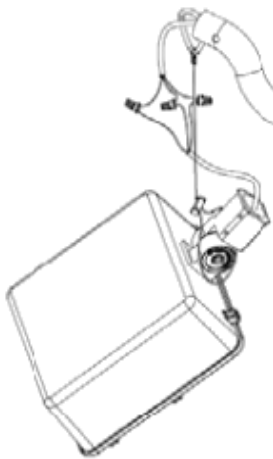

Picture A

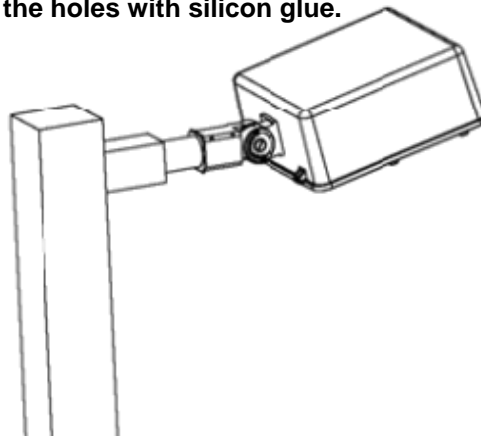

Picture B

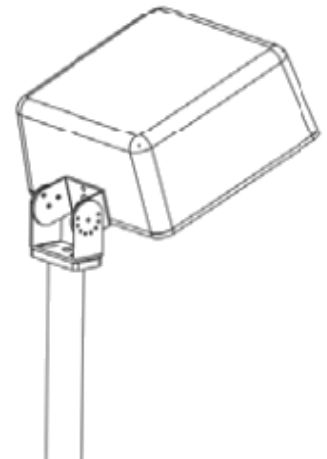

Picture C

Mounting configurations

Wall Mount

Arm Mount Single






Arm Mount 2 @ 180°

Arm Mount 2 @ 90°

Arm Mount 3 @ 120°
(Round Pole Only)

Arm Mount 3 @ 90°

Arm Mount 4 @ 90°



WARNING

The unit is designed for years with minimum care. For optimum performance, periodically clean the reflector and lens with a mild, non-abrasive glass cleaner and soft cloth. Do NOT use solvents or cleaners containing abrasive agents. When cleaning the fixture, make sure you have the power turned off and do not spray liquid cleaner directly onto the LED, socket, or wiring.



1# Xinxing Road, Shutianpu Community, Gongming,
Shenzhen, Guangdong Province, 518106, China
TEL: 86-755-89491179 89491279 89491379
www.Rise-Lite.com sales@rise-lite.com

All right reserved @ RISELITE