


HOW IT WORKS

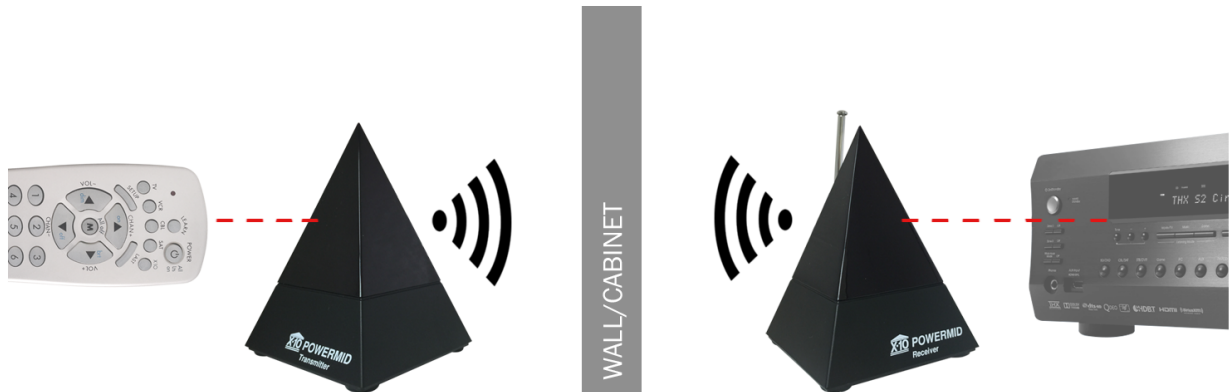

The PM5900 Transmitter turns the IR Signal into a Radio Frequency (RF) Signal that can pass through walls.

The RF signal is received by the PM5900 Receiver and turned back into an IR signal for your devices.

Installation and operating instructions for ST539 Transmitter and RE549 Receiver, both included in the PM5900 Set.

1. Plug the Powermid Transmitter (Model ST539) into a 120V AC outlet in the room where you want to use your remote control (up to 20 feet away from where you normally sit). Make sure the front of the unit (with the Powermid name on it) is facing you.
2. Plug the Powermid Receiver (Model RE549) into a 120V AC outlet in the room where your TV, VCR, stereo, etc., that you want to control is located (up to 20 feet away from what you want to control). Point the front of the Powermid Receiver towards the unit you want to control. Fully extend the antenna.

Note: The Transmitter and Receiver can be in different rooms, up to 100 feet away from each other.

3. Point your remote control at the Powermid Transmitter and press any button. The Powermid Transmitter receives the Infrared (IR) signals from your remote and converts them to Radio Frequency (RF) codes. It sends these codes (even through walls and ceilings) to the Powermid Receiver which converts the codes back to IR codes to control your TV, VCR, etc.

You can add more Transmitters to use your remotes in more than one room. Add more Receivers to control equipment in more than one room. Add an IR Extender, Model RX569 (sold separately) if you want to place the Powermid Receiver next to your TV, etc., instead of in front of it. Or if your equipment is located inside a closed cabinet.

X10 Wireless Technology, Inc. 120 Day Limited Warranty

X10.com, a division of Authinx, Inc. warrants X10 products to be free from defective material and workmanship for a period of 120 Days from the original date of purchase at retail. X10 agrees to repair or replace, at it's sole discretion, a defective X10 product if returned to X10 within the warranty period and with proof of purchase.

If service is required under this warranty:

- Call Us at 888 384-0969
- Email Us at support@x10.com
- Or visit www.x10.com/support for help.