

EMB250

NICOR Emergency Pack 25W

Product Description

The EMB250 is an LED emergency driver for factory or field installations that enables normal and emergency operation of a LED fixture. During a power failure, the EMB250 activates emergency mode to maintain constant output power to the fixture for a minimum of 90 minutes without light degradation. The EMB250 contains a battery, charger, and converter circuit in a single housing. Also includes a test button and button installation faceplate.

Construction

- Heavy duty steel case
- Orange powder coat finish
- 24" flexible conduit leads

Electrical

- Long life high temperature Li-Fe-Po battery
- Single piece test switch/charge indicator included
- Constant power design provides consistent lumen output for >90 minutes
- Self sensing output voltage adjusts for various products such as troffers, downlights, strips, etc.
- 48 hour recharge time

Installation

- For use with switched or unswitched fixtures
- Rated for plenum, damp location, and type IC luminaires
- UL Classified for factory and field installation

Warranty

- 3-year limited system warranty standard

PRODUCT INFORMATION




Input Voltage:	120-277 VAC 50/60 Hz
Input Power:	8W
Output Voltage:	11-56 VDC
Output Power:	25W (Max)
Emergency Operation:	90 Minutes
Operating Temp:	32°F to 122°F (0°C - 50° C)
Weight:	2.8 lbs

Project _____

Catalog _____

Type _____

Date _____

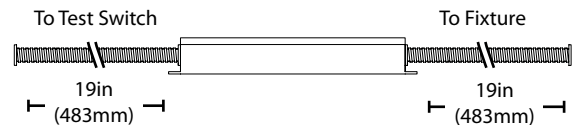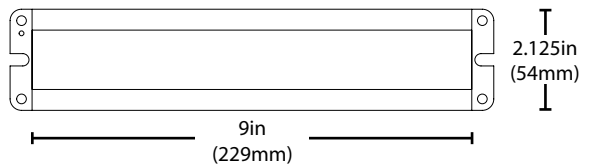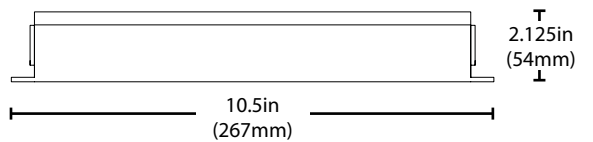

Ordering Information

Example: EMB250-10-UNV

Series	Version	Voltage
EMB250	10 (Version 1)	UNV (120-277V)

Specifications and dimensions subject to change without notice