


# MULTI BAND VHF/UHF


## MULTI BAND VHF/UHF COILS/WHIPS

Model	Type	Frequency (MHz)	Gain (dBi)	Max Height (In)	Power Rating (Watts)	Whip Color	Cable Assembly
NMO2/70BCO	Dual Band Coil	144-148 / 440-450			100	Coil Only	Order Separately
NMO2/70B	VHF: Center Loaded 1/2 $\lambda$	144-148	3.8	34.5	100	Black	Order Separately
	UHF: Collinear	440-450	5.2				
NMO2/70SH	VHF: Center Loaded 1/2 $\lambda$	144-148	2.14	19	200	Stainless	Order Separately
	UHF: Center Loaded 3/4 $\lambda$	440-450	4				
NMO150/450C	VHF: Center Loaded 1/2 $\lambda$	150-154	3.8	37.25	100	Stainless	Order Separately
	UHF: Collinear	450-460	5.2				
NMO150/450/800	Tri Band	150-165 / 450-470 / 806-940	2.14	16.5	100	Black	Order Separately

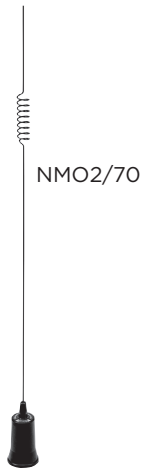

## MULTI BAND VHF/UHF GLASS MOUNT

Model	Type	Frequency (MHz)	Gain (dBd/dBi)	Max Height (In)	Power Rating (Watts)	Whip Color	Cable Assembly	Connector
KG2/70CXPL	1/2 $\lambda$ Collinear	144-148 / 442-448	0/2	32.75	100	Black	14' RG-58A/U	PL-259
KG2/70CXFME	1/2 $\lambda$ Collinear	144-148 / 442-448	0/2	32.75	100	Black	14' RG-58A/U	FME



## MULTI BAND VHF/UHF MAGNETIC MOUNTS

Model	Type	Frequency (MHz)	Gain (dBi)	Max Height (In)	Power Rating (Watts)	Whip Color	Cable Assembly	Connector
MM2/70PL	VHF: Center Loaded 1/4 $\lambda$	144-148	2	21	50	Black	12' RG-58A/U	PL-259
	UHF: Center Loaded 3/4 $\lambda$	442-448	4					



The most commonly used cable assembly/mount is the NMOKHFUD (27 MHz to 6 GHz) with 17' of UD (RG-58/U Dual Shield).

[www.pulseelectronics.com/products/antennas](http://www.pulseelectronics.com/products/antennas)

NOTE: Antennas are not to scale