


LTspice Model

Photocoupler Tr. Output

TOSHIBA

TLP185



1: アノード
3: カソード
4: エミッタ
6: コレクタ

Model Information

Model An original macro model
Call Name MDC_TLP185_LT
Pin Assign 1:Anode 3:Cathode 4:Emitter 6:Collector
File List Model Library MDC_TLP185_LT02.lib
 Model Report MDC_TLP185_LT.pdf (this file)

Verified Simulator Version LTspice version XVII
Note

References

The information which was used for modeling is as follow:

[Data Sheet]

- Date/Version 2014/9/1
- Product name TLP185
- Company name Toshiba Corporation
- Characteristics $I_{fVf}[Temp]$, ΔI_{fVf} , $I_{cVce}[If]$, $I_{cIf}[Vce]$, $I_{cTemp}[Vce]$, $CTR_{If}[Vce]$, $V_{cesatTemp}[If]$, $V_{cesatTemp}[If]2$, $I_{cTemp}[If]$, $SwitchingRL[Tname]$, $SwitchingTemp[Tname]$, $CjVr$, $CceVce$, $SwitchingWaveform$

Simulation Range

This table shows the range of evaluated simulation range that was not occurs any convergence problems in this area.

Item	Range			Unit
	Min.		Max.	
Collector-emitter voltage (DC)	0	to	80	V
Temperature	-55	to	125	deg C

Photo Coupler


○ : Implemented
 × : Not Implemented
 — : Not applicable

Model Functions Table
RANK=1


Functions	RANK	Implemented
IF-VF(Temp)	1	○
IC-VCE-IF(Temp)	1	○
Idark-Temp(Vce)	1	○
VCE(sat)-Temp(IF)	1	○
IC-IF(VCE)	1	○
CTR-IF(VCE)	1	○
IC-Temp(IF)	1	○
Switching	1	○
Capacitance	1	○

Simulation results are following.
 Explanatory notes — : simulated

IfVf[Temp]

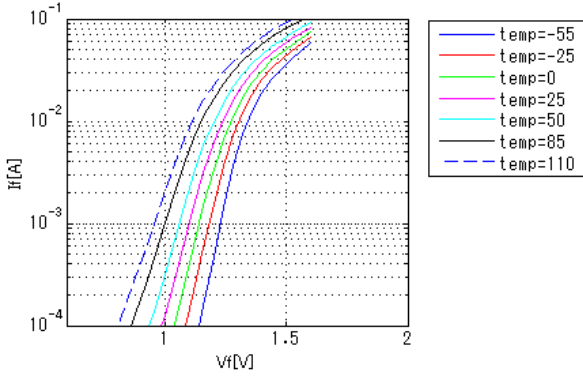


DeltavIf

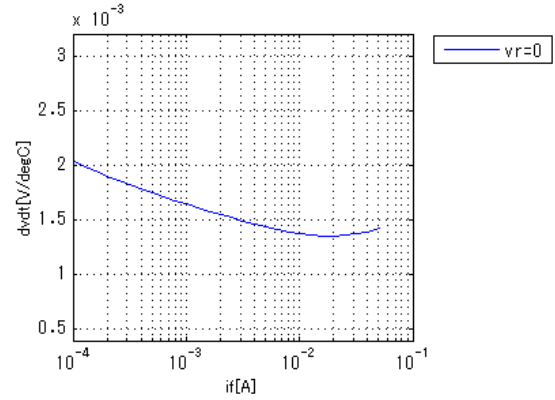


IcVce[If]

temp = 25degC

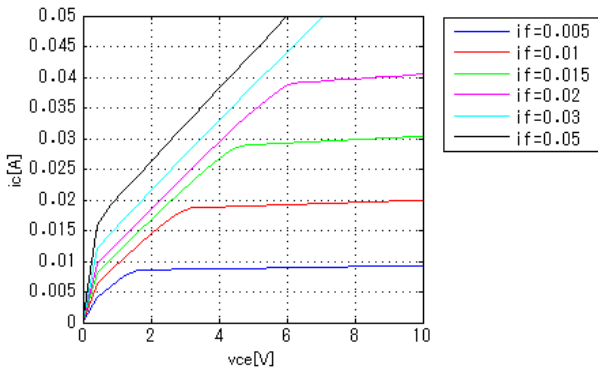


IcVce[If]

temp = 25degC

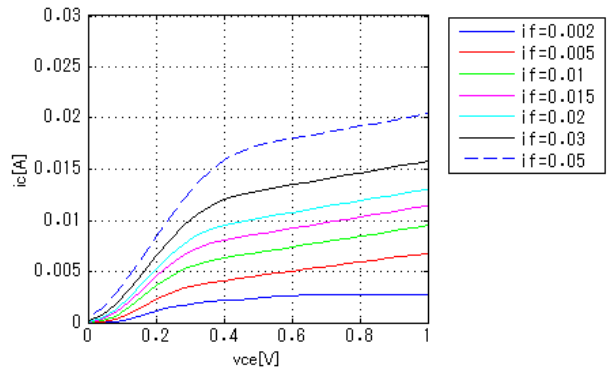


IcIf[Vce]

Temp = 25degC

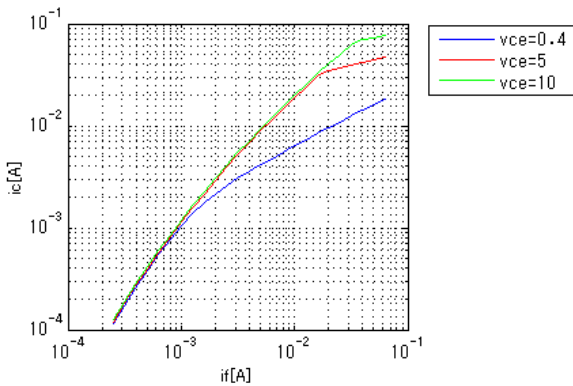


IcTemp[Vce]

If = 0A

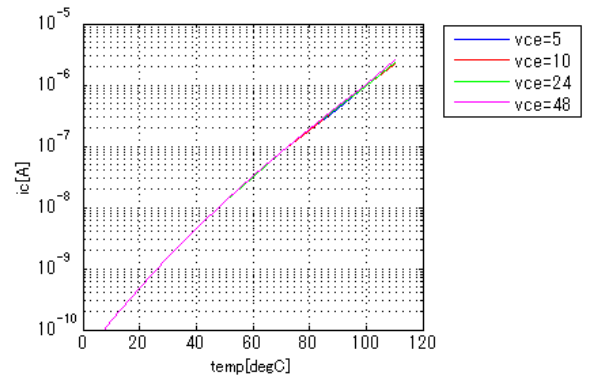


Simulation results are following.
 Explanatory notes — : simulated

CTRif[Vce]

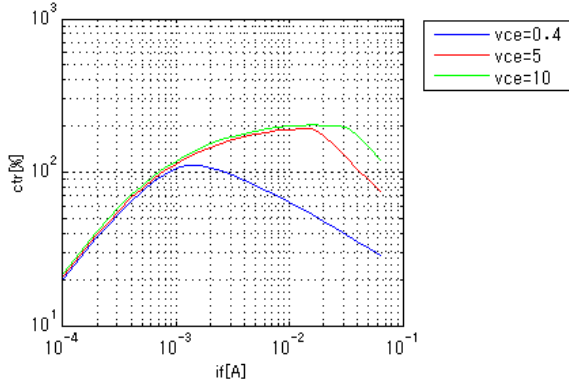


VcesatTemp[If]

Ic = 0.0002A

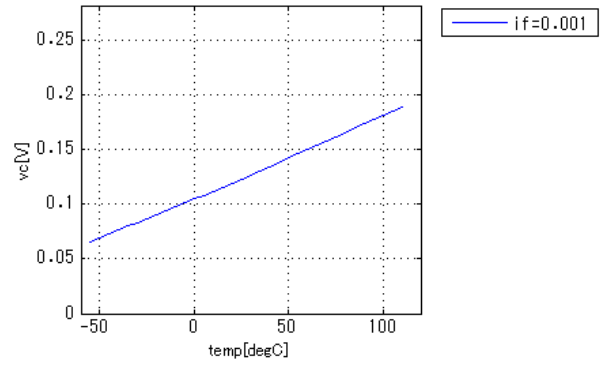


VcesatTemp[If]2

Ic = 0.0024A

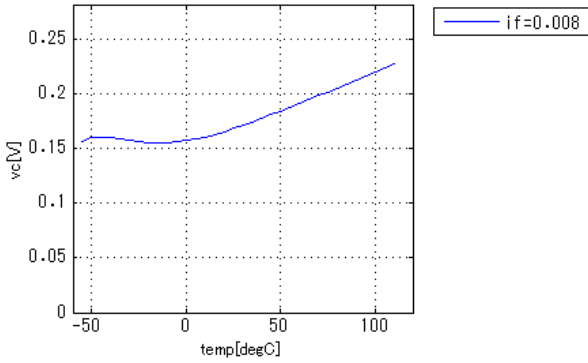


IcTemp[If]

Vce = 5V

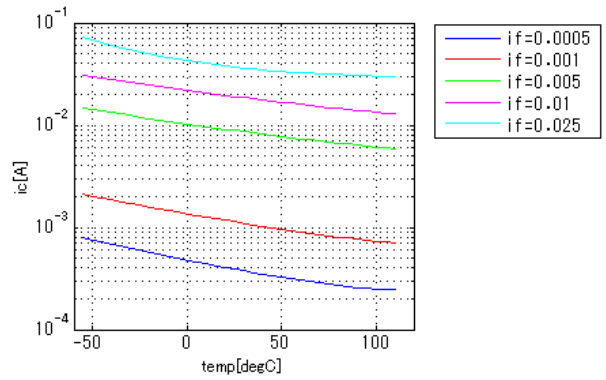


SwitchingRL[Tname]

if = 0.016A, vcc = 5V, temp = 25degC

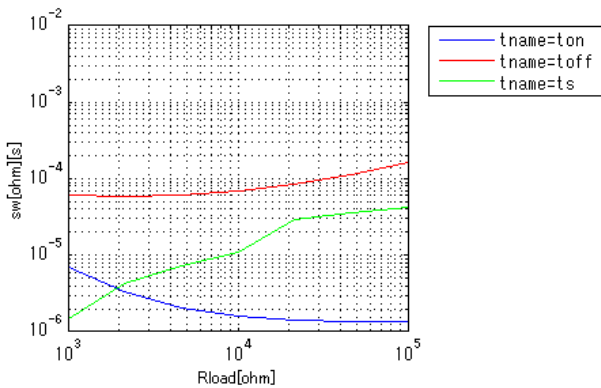

SwitchingTemp[Tname]


if = 0.016A, vcc = 5V, RL = 1900ohm

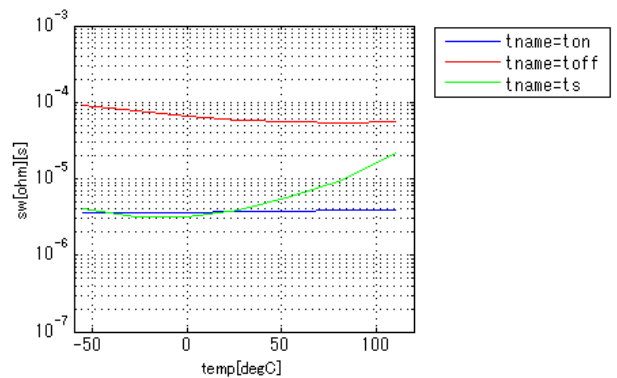

Simulation results are following.
 Explanatory notes — : simulated


CjVr

freq = 1000000Hz, temp = 25degC

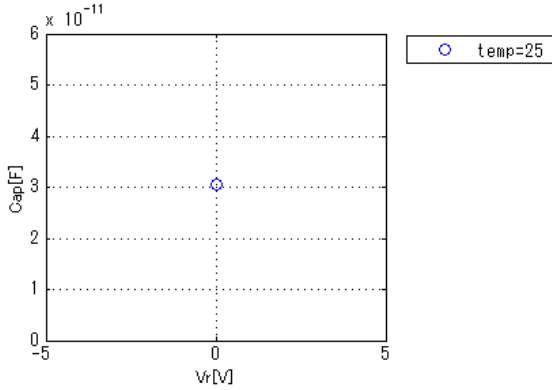



CceVce

freq = 1000000Hz, temp = 25degC

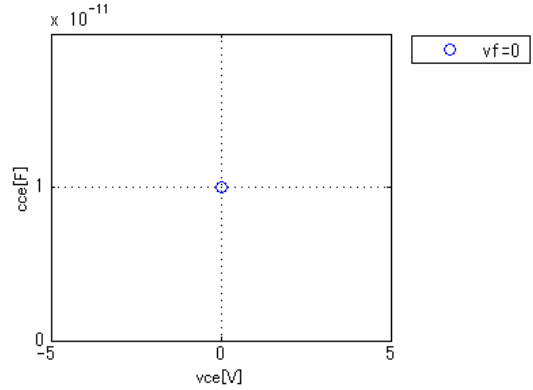

Switching Waveform (Blue : INPUT Red : OUTPUT)

vcc = 5V, if = 0.016A, Temp = 25degC, RL = 2154ohm

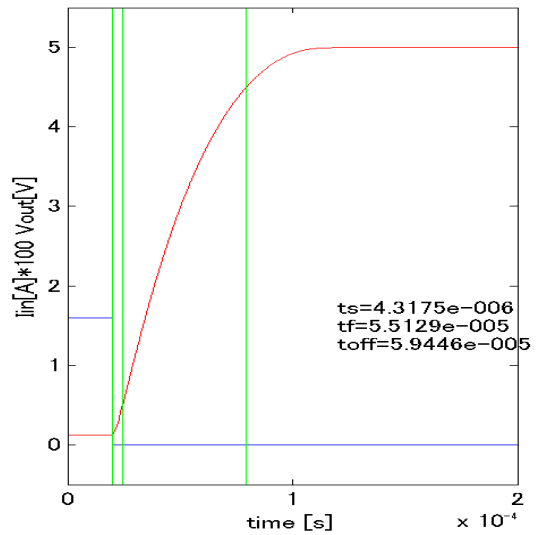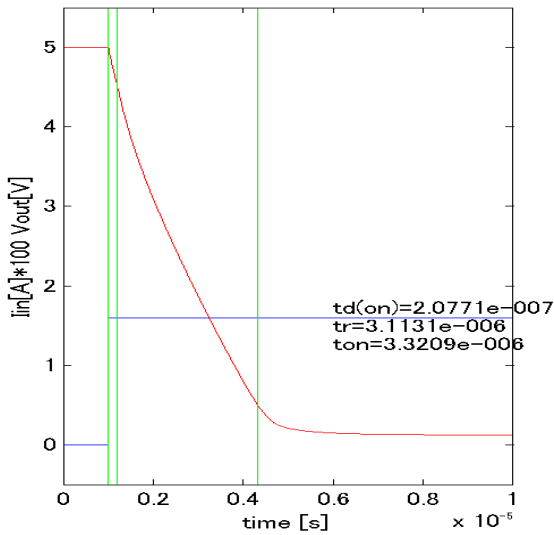

DISCLAIMER

1. This SPICE (Simulation Program with Integrated Circuit Emphasis) model and its content (the "Contents") are copyright of MoDeCH Inc. All rights reserved. Any redistribution or reproduction of any or all part of the Contents in any form is prohibited without express written permission made by MoDeCH Inc.
2. MoDeCH Inc. as licensor (the "Licensor") hereby grants to you, as licensee (the "Licensee"), a non-exclusive, non-transferable license to use the Contents as long as you abide by the terms and conditions of this DISCLAIMER.
3. The Licensee is not authorized to sell, loan, rent and redistribute or license the Contents in whole or in part, or in modified form, to anyone.
4. The Licensor shall in no way be liable to the Licensee or any third party for any loss or damage (including, but not limited to, lost profits, or other incidental, consequential, or punitive damages), however caused (including through negligence) which may be directly or indirectly suffered from, arising out of, or in connection with, any use of the Contents .
5. Notwithstanding anything contained in this DISCLAIMER, in no event shall Licensor be liable for any claims, damages or loss which may arise from the modification, combination, operation or use of the Contents with the Licensee's computer programs.
6. The Licensor does not warrant that the Contents will function in any environment.
7. The Contents may be changed or updated without notice. MoDeCH Inc. may also make improvements and/or changes in the products, pricing and/or the programs related to the Contents at any time without notice.



MoDeCH Inc.

Head Office

Location: 5-15 Yokoyama-cho, Hachioji-Shi, Tokyo 192-0081, Japan

Tel:+81-42-656-3360

E-Mail:model-on-support@modech.co.jp

URL:<http://www.modech.com/en/>