

weBoost Installed | Office 200

SKU: 473047

MAP: \$3,799.99

FEATURES

- Best-in-class amplifier system for small-to-medium businesses
 and warehouses
- Covers 15,000 to 35,000 square feet
- Includes professional installation anywhere in the US
- · Comes with 2 inside antennas for more complete coverage
- Is FCC approved and works on all U.S. carrier networks, including Verizon, AT&T, Sprint, T-Mobile, UScellular, and more

About

Resolve cell signal issues with a quick, turnkey solution that includes complete, professional installation. **The weBoost I Installed Office 200** is our best-in-class amplifier solution, designed for small-to-medium businesses and warehouses. It comes with two low-profile antennas for optimal cell signal coverage throughout a commercial space. weBoost Installed I Office 200 is 5G compatible and improves cell signal on all U.S. carrier networks, including Verizon, AT&T, Sprint, T-Mobile, UScellular and others. weBoost Installed I Office 200 also comes with an industry-leading 3-year manufacturer's warranty and a 30-day money-back guarantee.

Kit Includes









PROFESSIONAL

INSTALLATION INCLUDED

5GCOMPATIBLE

2x Low Profile Dome (314407)

Professional Installation

Power Supply

(850026)

Office 200

Outside Omni Plus (314423)



2-Way Splitter (850034)

*Cables will be provided by installer


Specifications

SKU NUMBER	473047*	
FREQUENCIES	Band 12/17	700 MHz
	Band 13	700 MHz
	Band 5	850 MHz
	Band 4	1700/2100 MHz
	Band 25/2	1900 MHz
MAX GAIN	72 dB	
IMPEDANCE	75 Ohm	
POWER	110-240V AC, 50-60 Hz, 20 W	
CONNECTORS	F-Female	
BOOSTER DIMENSIONS	14.25 x 10.75 x 2.25 in	
BOOSTER WEIGHT	7.7 lbs	

★ WARNING: This product can expose you to chemicals including Nickel, which is known to the State of California to cause cancer, and Bisphenol A, which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov



How It Works

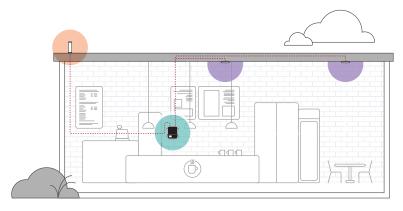

Outside antenna: The outside antenna communicates back and forth with nearby cell towers.


Booster: The booster amplifies any cell signals it receives from the outside antenna.

2

3 Inside antennas: The inside antennas broadcasts these signals for use throughout your business.

Package Dimensions (Approx.)

20 L x 16 W x 14 H

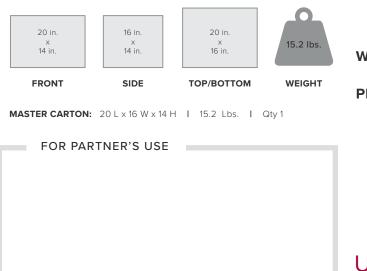

Support





473047_weBoost Installed | Office 200_SS_062321