



LTS-8TS-2U | 15 Feet USER GUID

CRST 8-Outlet & 2-USB Heavy Duty Power Strip Surge Protector




RELOCATABLE POWER TAPS WITH SURGE PROTECTOR
MODEL: LTS-8TS-2U

Intertek
3165047

CONFORMS TO UL STD. 1363 AND 1449
CERTIFIED TO CSA STD. C22.2#308 AND 269.3


Contents

- Power strip X1
- User manual X1
- Hook-and-loop cord tie X1

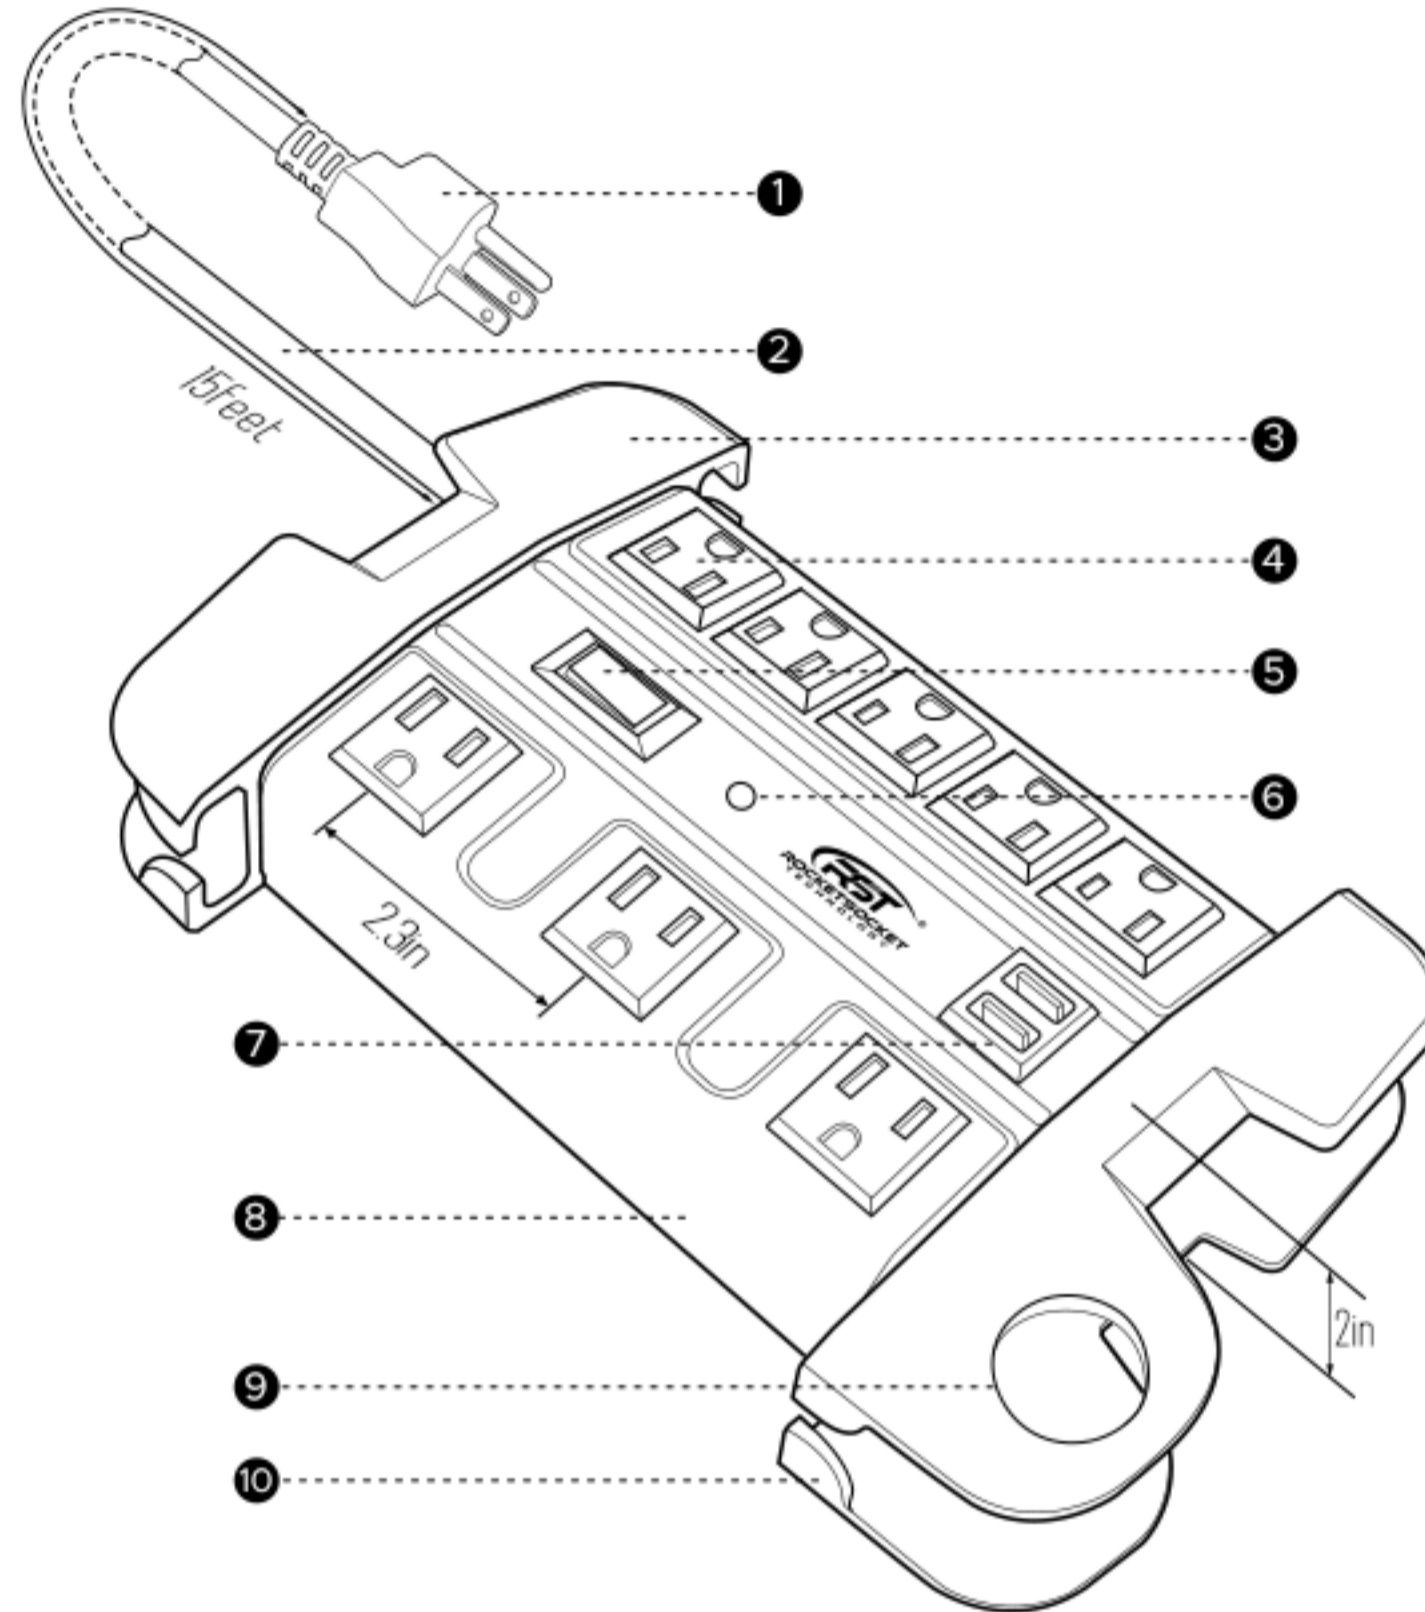

- 1. Power plug (Type B)
- 2. Power cord (14AWG)
- 3. Shock-proof panel
- 4. AC outlet
- 5. ON/OFF Switch (Built-in circuit breaker)
- 6. LED indicator
- 7. USB Ports (total 3.1A)
- 8. Metal housing
- 9. Hanging hole
- 10. Cable winding holder
- 11. Mounting holes

CIRCUIT BREAKER The product can accommodate a total equipment load of up to 15 A (1800 W). If the load exceeds 15 A, the built-in circuit breaker will trip and the outlets will stop providing power. In such case reduce the load by unplugging some devices and again set the power switch to RESET position.

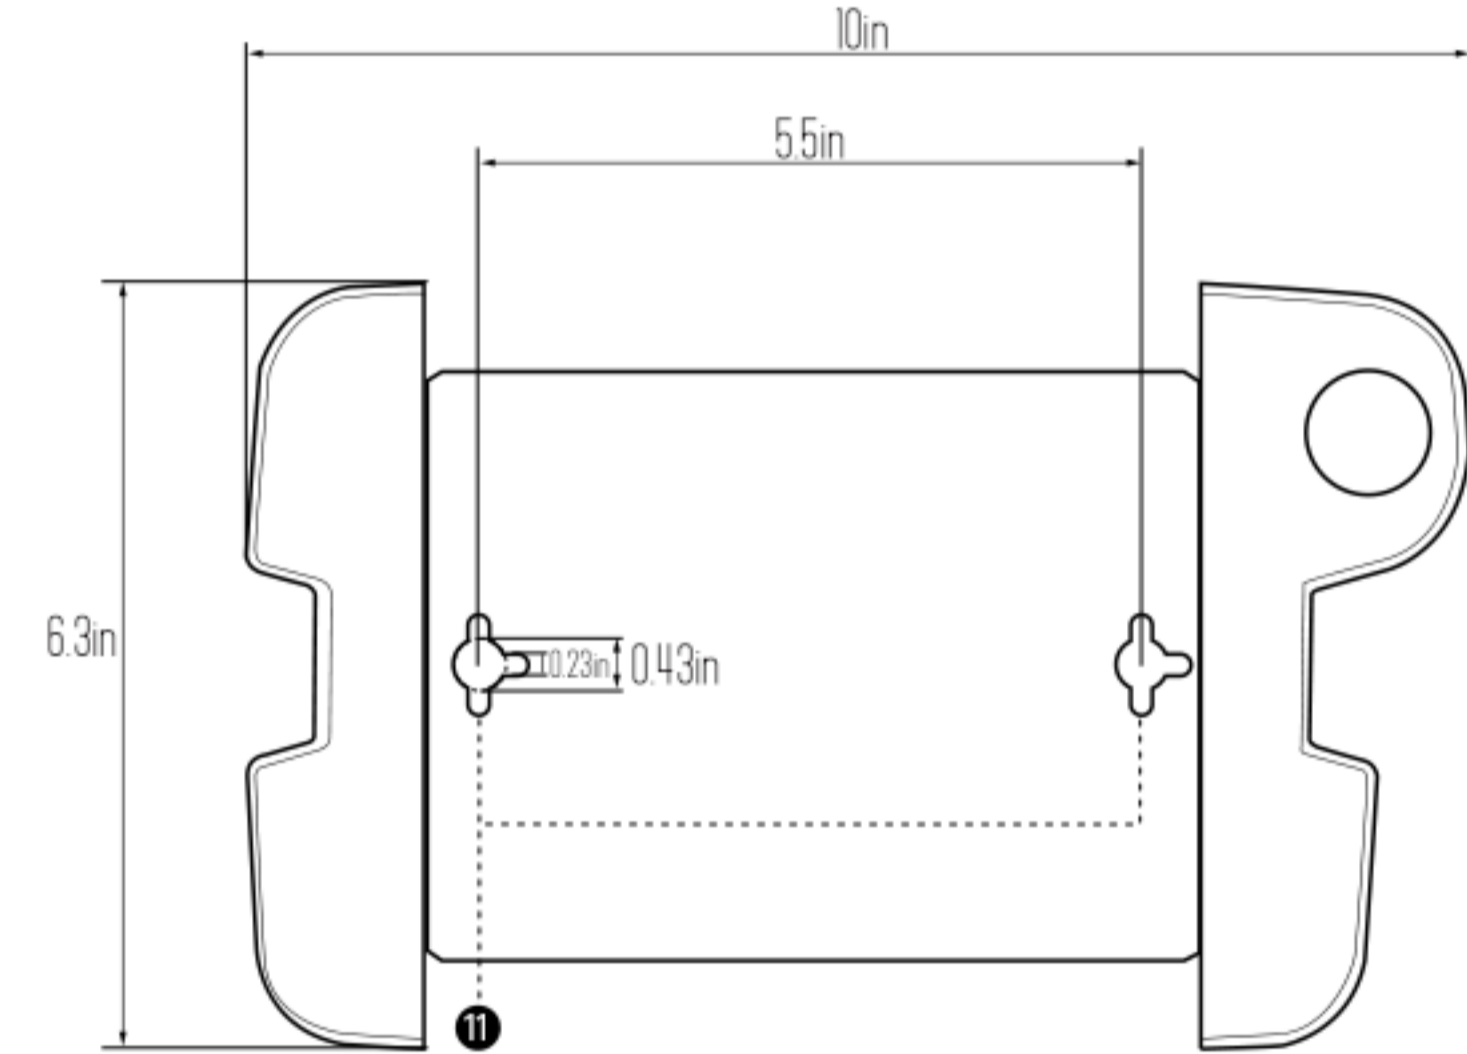

SPECIFICATIONS

Electrical rating	125V/15A/60Hz
Maximum power output	1875 W
Surge protection rating	1350 Joules
USB output rating	5V/3.1A Total
Cord rating	14AWG (3x2.08mm ²)
Cord length	15 Feet
Overload protection	15A
Product dimensions (W x H x D):	10x6.3x2 in

⚠ IMPORTANT SAFEGUARDS

- DO NOT USE IN WET LOCATIONS
- KEEP AWAY FROM CHILDREN
- INDOOR USE ONLY*
- FULLY INSERT PLUGS INTO OUTLET TO REDUCE RISK OF FIRE
- DO NOT EXCEED ELECTRICAL RATINGS
- DO NOT CONNECT DIFFERENT EXTENSION CORDS IN SERIES.

NOT FOR USE WITH:
• AQUARIUMS, NEAR WATER OR ANY OTHER SOURCE OF MOISTURE.

* You can temporarily use the product outdoors while ensuring a dry environment and avoiding splashes and rain.