



**WIFI (AIRPLAY2) & BLUETOOTH V5.0
MULTI-ROOM
2X100W / 4X100W AMPLIFIER
WITH IR REMOTE**


**MODEL:
AMP150 / AMP200**

QUICK START GUIDE

Contact Us:
15224 Stafford St
City of Industry, CA 91744



626-968-0211
626-839-9018
www.ticcorp.com/support

Front Panel Functions

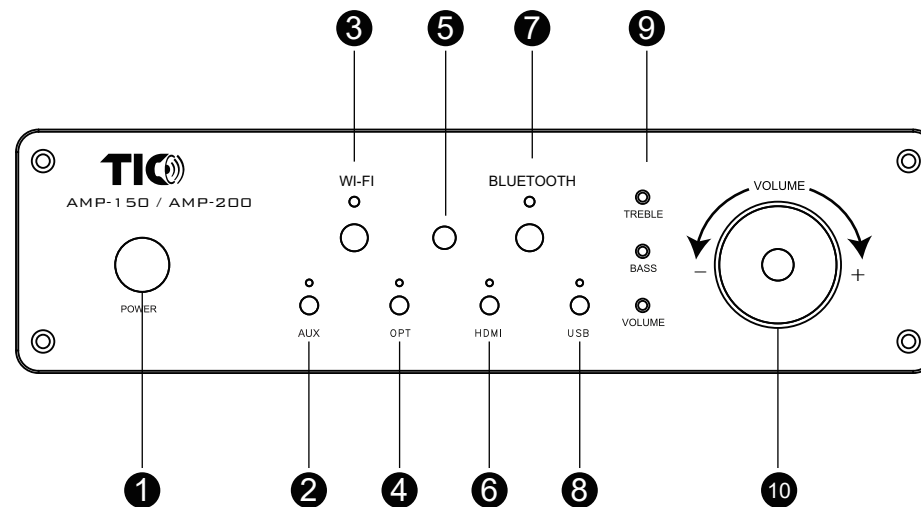

- 1. Power switch
- 2. AUX in indicator
- 3. Wi-fi indicator
- 4. Optical indicator
- 5. Infrared remote control receiver
- 6. HDMI indicator
- 7. Bluetooth indicator
- 8. USB indicator
- 9. Volume indicator
- 10. Volume control

Connections

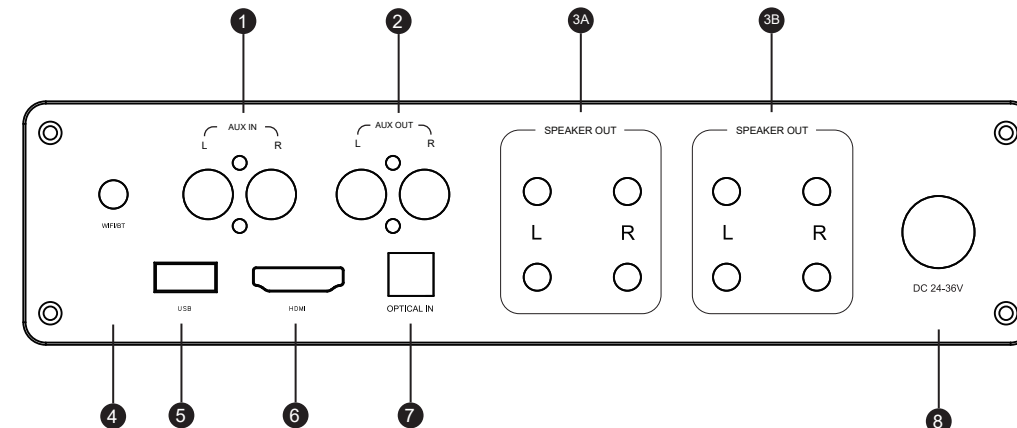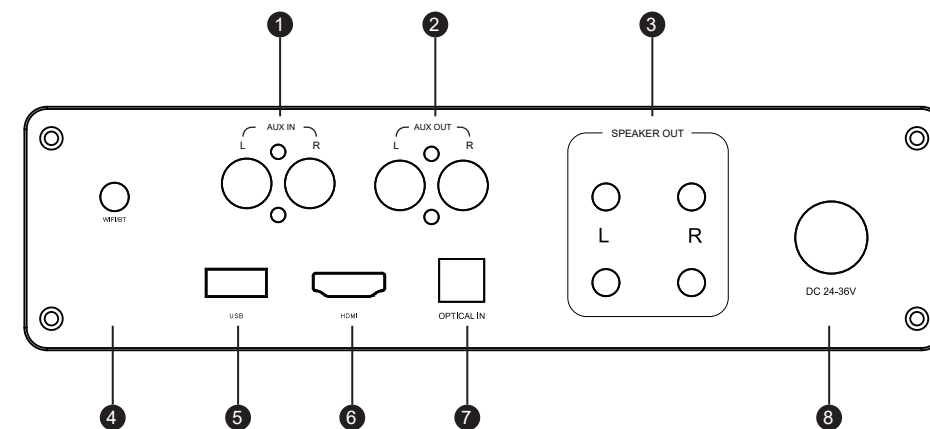

- 1.AUX Input
- 2.AUX Output
- 3A 3B.Speaker Output
- 4.Wifi/BT ANT
- 5.USB Input
- 6.HDMI Input
- 7.Optical Input
- 8.Power


*Function Introduction

- Support WiFi 2.4G & 5G
- Support Bluetooth 5.0
- Support 24bit/44.1KHz~24bit/192KHz
- Support Airplay2, DLNA, iHeartRadio, Spotify, TIDAL, Napster, Qobuz, Deezer
- Support network multi-room
- Support optical input
- Equipped with full frequency stereo output

* Main technical parameters

Name	Technical Parameter
Product Name	WIFI BLUETOOTH V5.0 MULTI-ROOM 2X100W / 4X100W AMPLIFIER
Product Model	AMP150 AMP200
Audio Input	WIFI/ Bluetooth/OPTICAL/AUX/USB
Audio Output	AUX
Work Voltage	DC 30V-5A
Output Power	2 X 100 W (8Ω) 4 X 100 W (8Ω)
Frequency Response	20 H z - 20 k H z
Harmonic Distortion	0.05%
Impedance	4-16 Ohm
SNR	95db
AUX	Input sensitivity 1 V
RCA output	Rated level 1V

IR Remote

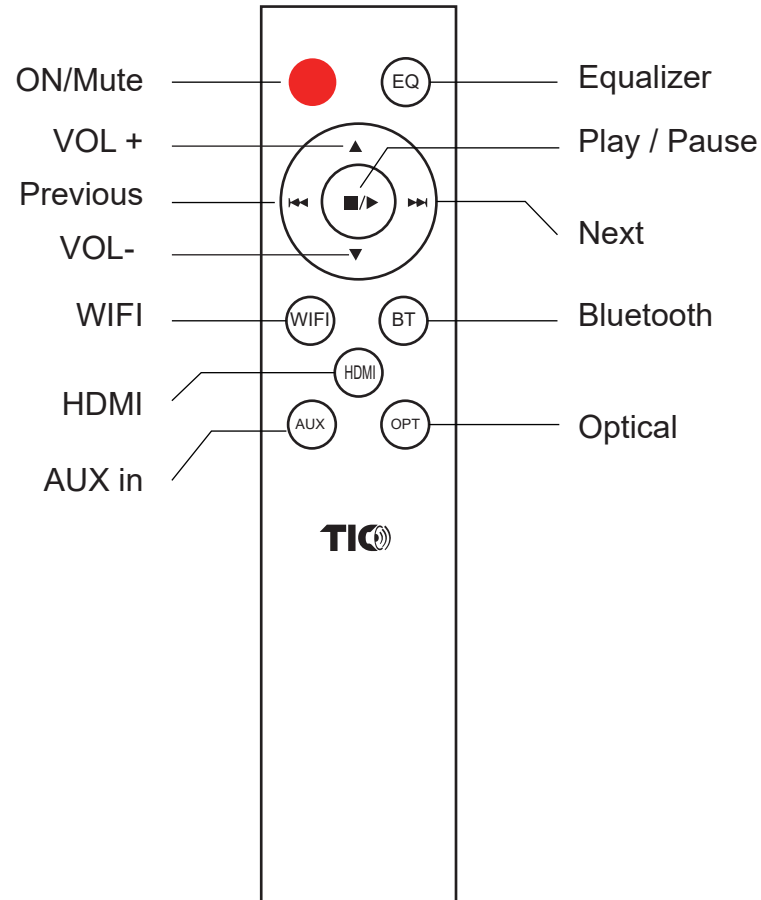

WI-FI Setup

Wi-Fi SetupDownload and install the Muzo app by scanning below QR code, or search “Muzo Pod” in the App Store (iOS devices) / Google Play (Android devices).

Open the App and follow the on-screen guide to set up your Wi-Fi audio network.

Note:

*For additional information, see the App “Muzo Pod” Guide and Product Manuals online at www.ticcorp.com.

Scan to download for iOS



Scan to download for Android

