




INSTRUCTION MANUAL

CHLOE OUTDOOR WALL SCONCE




Redhoumy



Thank you for choosing Redhoumy as your shopping destination. We greatly value your patronage and strive to provide exceptional customer service throughout the entire purchasing and delivery process. To assist you further, we have provided a comprehensive installation guide for this light. If you require any additional assistance, please don't hesitate to contact us via email at support@redhoumy.com. Our dedicated customer service representatives will be ready to support you.

Before commencing the installation process, please follow these important steps:

- Ensure that the electrical power to the fixture is turned off at the electrical panel.
- Utilize a suitable voltage tester to confirm the absence of any electrical power at the fixture before starting any work. Do not solely rely on a wall switch for protection against electrical shock.
- Please note that the installation of this product requires the expertise of an experienced electrician.
- It is essential to note that this product does not cover a standard US junction box due to its slim design. To address this, we have included a junction box cover that you can install to cover the box. The wall plate consists of two pieces that can be combined to form a square-shaped cover. Refer to the image below for visual reference:

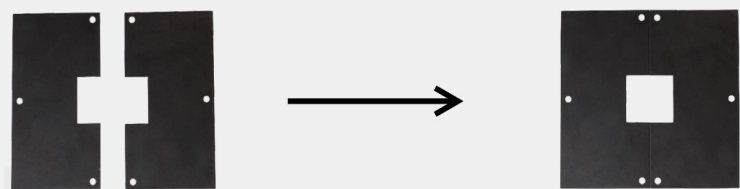

Assembly Inventory:

Assembly Inventory Check:

Kindly review the assembly inventory provided below. In the event that you find any missing items, please don't hesitate to contact our customer service team for assistance.

A. 1 x Assembled LED Light (refer to image 1.1)

Includes light bar and wires

B. Wall Bracket (refer to image 2.1)

C. Waterproof Wire Connector

D. Regular Screws

E. Plastic Drywall Anchor

Tools needed (not included):

1 x Screw Driver 1 x Electric Drill



Image 1.1



Image 2.1


Installation Instructions:



Be sure to cut off power
IN CASE OF ELECTRIC SHOCK!

If you require any assistance during the installation process, please don't hesitate to reach out to our customer service team. Here are the step-by-step instructions to guide you:

1. Mark the drilling position on your wall or ceiling using a pencil or pen. The silver bracket can be used as a reference point to mark the position of the light. Ensure that you take into account the wiring position on your wall or ceiling.
2. Use a drill to create holes in the wall where you marked in step 1.
3. Insert the plastic drywall anchors into each hole. Be careful not to damage or force the anchors into the holes. If the holes are too small, you may need to make them slightly bigger.
4. Securely attach the silver brackets to the wall using a screwdriver. Please note that at this stage, the lamp should not be attached. This step will be completed after wiring.
5. If you need a plate to cover the junction box opening in your wall, please follow step 5. If not, you may skip this step. Use a pencil to mark the drilling position on the junction box cover. Drill six holes as indicated on the cover. Insert drywall anchors into each hole and screw the wall plate onto the wall. The wall plate consists of two pieces that can be combined to form a square-shaped cover. Ensure that the wall wires are still accessible by inserting them through the center of the junction box cover.
6. Before wiring the lamp, please make sure you understand the wiring instructions. The black wire represents Live, the white wire represents Neutral, and the green wire represents Ground. Use the provided waterproof connector to wire the lamp. Insert the wires from the lamp into one end of the connector. Loosen the screws slightly in the middle of the connector, place the wire through, and then tighten the screw to hold the wire securely. Repeat this step for your wall wires.

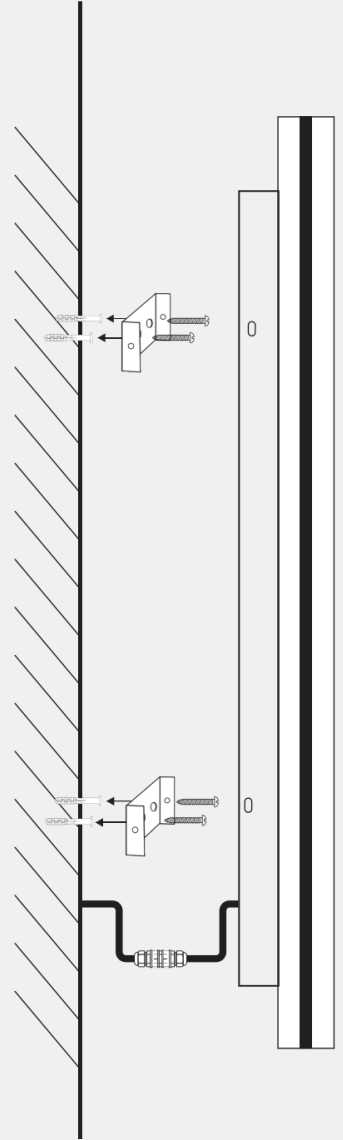

1. Attach the wall lamp to the silver brackets using the provided screws. At this point, you may turn your electrical power back on and test the lamp.

If you encounter any difficulties or have any questions during the installation process, please don't hesitate to contact our customer service team. We are here to assist you.

Email: support@redhoumy.com

Remote Control Instructions



Please take note that the remote control is included with the dimmable version only. Follow the instructions below to install and connect the remote control:

1. Install two AAA batteries in the remote control. Once the batteries are installed, point the remote at the light fixture and press the "On" button. The light will turn on automatically once the remote is connected. If the remote does not connect, proceed to step 2.

2. To connect the remote control to the lamp, it must be done within the first 5 seconds after powering on the fixture. Press and hold the "Connect" button on the remote until the fixture flashes.

3. Once the light is turned on, use the "↑" and "↓" buttons on the remote to adjust the brightness. Pressing the "↑" button will increase the brightness, while pressing the "↓" button will decrease it.

4. Similarly, use the "→" and "←" buttons on the remote to adjust the color temperature of the light. Pressing the "→" button will decrease the temperature, resulting in a warmer emitting color. Pressing the "←" button will increase the temperature, resulting in a colder emitting color.

To pair multiple fixtures with the same remote:

1. Within the first 5 seconds of the light being powered on, press and hold the "ON 1" button on the remote until the fixture starts to flicker. Once the flickering stops, it indicates that the fixture is paired.

2. To control multiple fixtures simultaneously, press and hold both the "ON 1" and "ON 2" buttons on the remote at the same time. This will enable you to control both fixtures simultaneously.

Please follow these instructions to properly set up and control your light fixtures using the remote control. If you have any further questions or require additional assistance, please don't hesitate to contact our customer service team.