




INSTRUCTION MANUAL

Redhoumy



Thank you for choosing Redhoumy as your shopping destination. We value your business greatly and are committed to delivering outstanding customer service every step of the way. To ensure your satisfaction, we have provided an installation guide for this light. If you need further assistance, please don't hesitate to contact us at support@redhoumy.com. Our dedicated customer service representatives will be more than happy to help you.

Before you begin the installation process, please follow these important steps:

1. Turn off the electrical power to the fixture from the electrical panel.
2. Use an appropriate voltage tester to verify that there is no power present at the fixture.
3. Once you have confirmed that there is no power, you can proceed with the installation.

Assembly Inventory:

Kindly review the assembly inventory. Should you discover any missing items, please contact our customer service team for assistance.

A - LED Light Assembly (refer to image 1.1)

Includes light bar and wires

B - Wall Bracket (refer to image 2.1)

D - Regular Screws (4 pieces) - available in silver or black color

E - Plastic Drywall Anchors (4 pieces)

Tools required (not included):

- Screwdriver (1 piece)
- Electric Drill (1 piece)

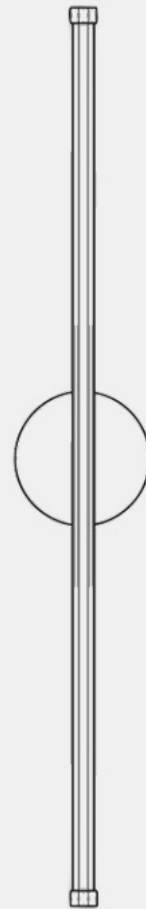


Image 1.1



Image 2.1

Installation Instructions

Step 1: Utilize a pencil or pen to mark the desired drilling position. You can utilize the silver bracket as a guide to mark the light's position. It is crucial to ensure that you consider the wiring placement on your wall or ceiling.

Step 2: Using a drill, create holes in the wall at the marked positions from step 1.

Step 3: Insert the plastic drywall anchors into each hole. Take care not to damage or force the anchors into the holes. If the hole is too small, try enlarging it.

Step 4: Using a screwdriver, securely fasten the silver bracket to the wall. Do not attach the lamp at this stage. This step should be completed after wiring.

Now that you have established the lamp's position, it's time to wire the lamp.

Step 5: (Skip this step if you have ordered the plug-in version) Identify the wires: Black Wire (Live), White Wire (Neutral), Yellow Wire (Ground). Connect the lamp's wires to the corresponding wall wires and neatly tuck them inside the lamp or within the wall.

Step 6: Attach the wall lamp to the silver bracket using the provided screws.

Now, you can restore electrical power and test the functionality of the lamp.

Redhoumy

Remote Control Instructions

Please take note that the remote control is included with the dimmable version only.

1. Install two AAA batteries into the remote control. Once the batteries are properly installed, aim the remote at the light fixture and press the "On" button to turn on the light. The remote should automatically connect once the batteries are inserted. If the remote does not connect, please proceed to step 2.

1. To connect the remote control to the lamp, you need to do it within the first 5 seconds after powering on the fixture. Press and hold the "Connect" button on the remote until the fixture flashes.

1. Once the light is illuminated, use the "+" and "-" buttons on the remote to adjust the brightness. Pressing the "+" button will increase the brightness, while pressing the "-" button will decrease it.

1. Additionally, you can use the "k+" and "k-" buttons on the remote to adjust the color temperature of the light. Pressing "k+" will increase the temperature, resulting in a warmer emitting color, while pressing "k-" will decrease the temperature, producing a cooler emitting color.

Helpful information: The bottom 5 buttons on the remote control serve the following functions:

1. Adjust brightness
2. Dim the light
3. Select the Warm White (4000K) option
4. Select the Warm (3000K) option
5. Select the Cold White (6000K) option



Redhoney