

Elita - LED Bollard

Model: BL210

Installation Instructions


All installations must be carried out by a qualified electrician following local regulations. Make sure that the power is switched off before installation. Please read and follow the 'Installation instructions' and 'Safety instructions' sections carefully before commencing installation.

Installation of this model can change from time to time please read instructions every time before installation. For detailed specification, please go to our website eurotechlighting.co.nz

Code:	Colour:	Dimensions (mm):	IP Rating:	Lamp type:	Voltage:	Material:
BL210-650	Black	120Ø x 650H	IP65	E27 15W max (Not Included)	230V	Die-cast Aluminium & Marine Grade Paint + Clear PC
BL210-850		120Ø x 850H				

Installation Instructions

1. Take out of the box and disconnect parts. Remove mounting plate and head with the Allen key provided. Remove lamp holder base and connector from head with a screwdriver.
2. Run cable in ground if using a 230V bulb if using a 12V bulb make sure to connect 12V transformer.
3. Run the cable through the centre of the mounting bracket. Fit the bolts to the 3 holes in the mounting bracket and secure bolts in the ground. Make sure you allow enough cable to reach the connector block.
4. Lock the Pole of the bollard into mounting bracket with provided Allen Key screws.
Connect the mains supply to the terminal block, using the following colour code for the wiring:
Connect the Brown (Live) wire to the corresponding terminal on the terminal block marked L.
Connect the Blue (Neutral) wire to the corresponding terminal on the terminal block marked N.
Insert the Bulb.
5. Screw lamp holder base to head with screwdriver ensuring a tight seal is made. Fit head to pole with Allen key.
6. Turn on Bollard.

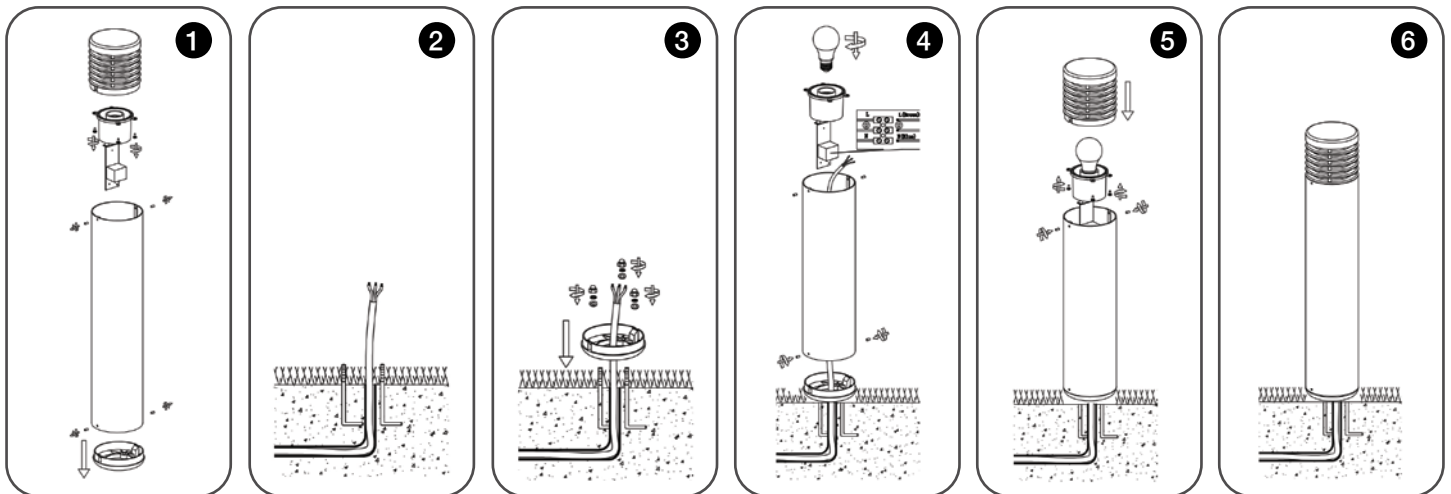

Changing the Bulb

1. Turn off the power.
2. Remove lens by turning and unlocking.
3. After the bulb has cooled, turn it anti-clockwise to unscrew it from the lamp holder.
4. When installing the new bulb, turn it clockwise into the socket until it stops. Do not overtighten.
5. Refit lens and turn to lock into place.

Safety Instructions

Read these instructions carefully before commencing installation.

1. This LED luminaire must be installed by a licensed electrician ONLY following all local regulations.
2. Ensure that the cables will not be squeezed or damaged by sharp edges.
3. Clean the light with a soft cloth and a standard PH-neutral detergent.
4. Misuse of/or changes to the appliance shall void all warranties.
5. Do not install on a surface that is not suitable or deformed.
6. Do not install on or above a surface with a high temperature.
7. There should not be any materials that are corrosive, explosive.



For detailed specification, please go to our website eurotechlighting.co.nz

Eurotech
lighting