

# Lamina - Step Lights

Model: LSL1001 & LSL1201

## Installation Instructions

All installations must be carried out by a qualified electrician following local regulations. Make sure that the power is switched off before installation. Please read and follow the 'Installation instructions' and 'Safety instructions' sections carefully before commencing installation.

Installation of this model can change from time to time please read instructions every time before installation. For detailed specification, please go to our website [eurotechlighting.co.nz](http://eurotechlighting.co.nz)







Code:	Colour:	Dimensions (mm):	Double Insulated:	IP Rating:	Kelvins:	Lumens:	Material:	Voltage:	Wattage:
LSL1001CCT	Black & White covers	100L x 60H	Yes	IP65	CCT= 3000K / 4000K / 6000K	80lm / 100lm / 90lm	UV Resistant ABS + Polycarbonate	230V	2W
LSL1201CCT		220L x 80H				260lm / 300lm / 275lm			3.8W

## Product Information



## Installation Instructions

1. Make sure power is turned off. Pop front cover off the fitting.
2. Unscrew IP65 shield.
3. Gently knock the provided plastic expansion tubes into the pre-drilled holes, ensuring the plastic tubes are flush with the mounting surface. Run the cable through the rubber seal. Fix backplate to the wall.
4. Connect cables paying attention to live + neutral markings.  
Blue = Negative  
Brown = Positive  
Use the switch at the back of the fitting to change the colour temperature.
5. Screw IP65 shield to backplate ensuring a tight seal is made.
6. Ensure installation is correct before switching on the fitting to test. Once correct, fit the provided front cover.

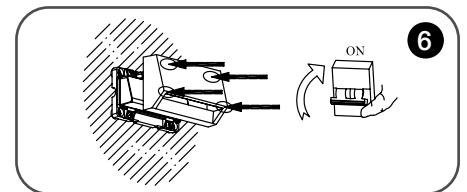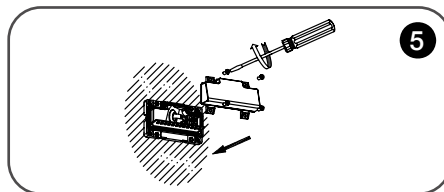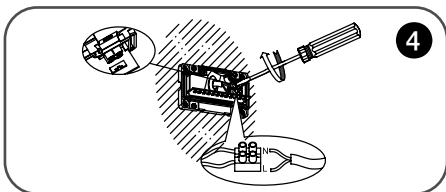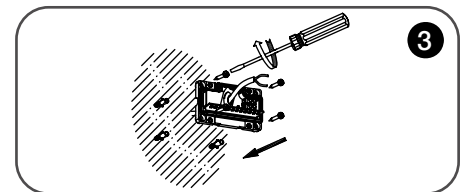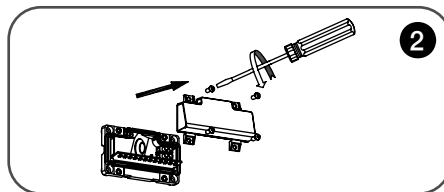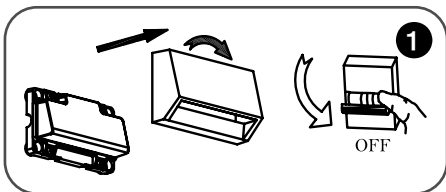

## Safety Instructions

Read these instructions carefully before commencing installation.

1. The light source contained in this luminaire shall only be replaced by the manufacturer or this service agent or a similar qualified person.
2. This LED luminaire must be installed by a licensed electrician ONLY following all local regulations.
3. Ensure that the cables will not be squeezed or damaged by sharp edges.
4. Clean the light with a soft cloth and a standard PH-neutral detergent.
5. Misuse of/or changes to the appliance shall void all warranties.
6. Do not install on a surface that is not suitable or deformed.
7. Do not install on or above a surface with a high temperature.
8. There should not be any materials that are corrosive, explosive.



For detailed specification, please go to our website [eurotechlighting.co.nz](http://eurotechlighting.co.nz)

**Eurotech**  
lighting