



Instruction Manual



BH-11 EQz

WIRELESS HEADPHONE

Turbo Bass Mode



Turbo Bass



BT 5.0



Voice Assistance

Thank you for choosing BH-11 EQz Bluetooth Headphone. Please follow all sides of this user guide to ensure proper usage and keep it for future reference.


Specifications

Model No:	BH-11 EQz	Sound Pressure level (Sensitivity) :	105+/-3dB at 1kHz
Wireless Range:	10meter/33feet	Power Voltage :	3V-4.2V
Transmission Frequency:	2402-2480MHz	Charging Voltage :	5V
Charging Current :	210mA	BT Version :	5.0
BT Music Current :	17~20mA	Talk Time:	Up to 20 hours
BT Call Working Current :	19~20mA	BT Music Play Time :	Up to 24 hours
Speaker :	40mm/32Ω±15%	Battery in headphones :	450mAh polymer battery
Mic Sensitivity	-42dB±3	Weight :	303g

Package Contents

- I * BH-11 EQz Bluetooth Headphone
- I * Micro USB Charging Cable
- I * 3.5mm Audio Cable
- I * User Guide
- I * Warranty Card

Product Overview

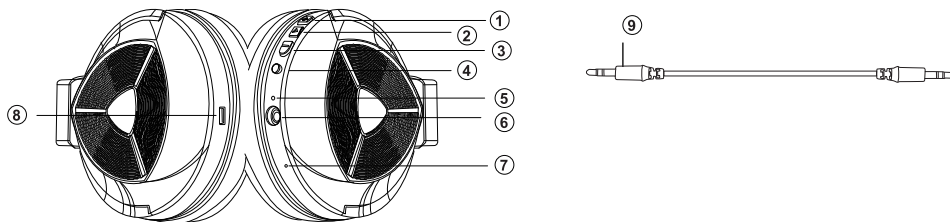

- | | | | | | | | |
|---|--------------------|-----------------------------------|--|--------------------|------------------------|--------------------|--------------------------------------|
| <p>1 Volume up/
Next track</p> | <p>[+]
[▶]</p> | <p>Short press
Long press</p> | <p>2 Multifunction
button</p> | <p>[⏻]
[▶]</p> | <p>On/Off
Play</p> | <p>[☎]
[⏸]</p> | <p>Call/Answer/Hang up
Pause</p> |
| <p>3 Volume down/
Previous track</p> | <p>[−]
[◀]</p> | <p>Short press
Long press</p> | <p>4 EQz Button/Voice Assistant</p> | | | | |
| <p>5 LED indicator—Bluetooth, Charging, Power on</p> | | | | | | | <p>6 3.5mm audio input</p> |
| <p>7 Microphone</p> | | | | | | | <p>8 Micro-USB input</p> |
| <p>9 3.5mm audio cable</p> | | | | | | | |

Getting started

● Charging the headphones

You can charge the headphones regardless of their power state (on or off).

1. Connect the micro-USB plug of the charging cable to the micro-USB input of the headphones.
2. Connect the USB plug to the USB port of your computer. If you are using an external power adapter, connect the USB plug to the power adapter or to the USB car charger adapter, and connect to the power source.

A complete charging cycle takes about 3 hours. Before using the headphones for the first time, charge the headphones for a complete charging cycle without interruption.

When being charged, the LED indicator lights up as Red constantly and will turn into Blue when fully charged. When the battery drops to a low level, a “beep” tone will be heard prompting you to recharge the headphones.

It is recommended to charge the headphones using only the supplied USB cable. You can't continue playing music or making calls on your smartphone while the headphones are being charged.

● Pairing the headphones with a Bluetooth device

Ensure that the headphones are within the range of your smartphone and that Bluetooth is activated on the headphones when performing this procedure.

1. Switch the headphones on, press the Multifunction button for 3 seconds or until you hear the voice prompt “pairing”. The LED light flashes red and blue alternately. The headphones are in pairing mode.

2. Activate Bluetooth on your smartphone.
3. On your smartphone, start a search for Bluetooth devices. All active Bluetooth devices in the proximity of your smartphone are displayed.
4. From the list of found Bluetooth devices, select “BLAUPUNKT-BH”. If necessary, enter the default PIN code “0000”.

If pairing was successful, you hear the voice prompt “connected”. The LED will flash blue occasionally.

● **Connect with two Bluetooth devices simultaneously**

1. Connect headphones with the first device as above. Then turn off the Bluetooth on the connected device.
2. Connect headphones with the second device as above.
3. Turn on the Bluetooth on the first device. Tap and select “BLAUPUNKT-BH” to connect them.
4. Now the headphones should be connected with both devices simultaneously.

NOTE: BH-11 EQz only has one audio channel, if you want to play music from another Bluetooth device, please pause the current device's music first.

● **Adjusting the headband**

For good sound quality and best possible wearing comfort, you can adjust the ear pad location on the headband to properly match the size of your head.

Wear the headphones so that the headband runs over the top of your head.

Adjust the location of the ear pads by moving the cups up and down of the headband slider until:

- your ears are comfortably covered by the ear pads.
- you feel even, gentle pressure around your ears.
- a snug fit of the headband in the head is ensured.

Using the headphones

- **Switching the headphones on**

Press the multifunction button for 3 seconds. You hear the voice prompts " power on" and the LED flashes between blue and red when the headphones are active.

- **Switching the headphones off**

Press the multifunction button for 3 seconds. You hear the voice prompt "power off" and the LED light turns off, indicating the headphones are off.

- **Adjusting the volume**

Press the volume +/- buttons once to increase or decrease the volume. When the maximum or minimum volume is reached, you hear an alert tone.

- **Playing music wirelessly**

The following music functions are only available when the headphones and your device are connected via Bluetooth. Some smartphones, music apps or players may not support all functions.

Playing/pausing music: quickly press the multifunction button.

Playing the next/previous track: press and hold the volume+/- button

- **Playing music using the audio cable**

Use the audio cable to listen to music when the headphones are running out of battery or when Bluetooth transmission is restricted or not allowed.

The headphones immediately switch off once the audio cable is plugged into the audio input.

Inserting the audio cable

1. Insert the 3.5mm jack plug into the audio input of the headphones. Bluetooth is deactivated.
2. Connect the 3.5mm jack plug to the audio output of your smartphone.

● Super EQ Technology

Press the **EQz** button and hold for 3 seconds to activate the bass boost mode transforming your audio into an immersive experience with powerful bass you can feel.

● Making calls on the headphones

1. Making a call: Dial the desired number on your smartphone.
If your smartphone does not automatically transfer the call to the headphones, select the **BH-11 EQz** as the audio source on your smartphone (see the instruction manual of your smartphone if necessary).
2. Accepting/rejecting/ending a call: Press the multifunction button once to accept and end the call, press and hold the multifunction button to reject an incoming call.
3. Redialing: You can use this function when the headphones are not actively playing music or are used for making calls.
 - Press quickly the multifunction button twice to redial the last number called and press the multifunction button once to cancel the redialing.
 - During the call, you can adjust the volume by pressing the volume+ or volume- button on the headphones.

● Accessing Voice assistant

You can use this function when the headphones are not actively playing music or are used for making calls.

1. Press the Voice assistant/EQz button ④ once to active Siri or Google assistant.
2. Say your voice command, such as "Call Jack". The Bluetooth smartphone dials the phone number of Jack.

● Clearing the previously paired devices

1. Set the headphones to pairing mode.
2. Simultaneously press the volume+ button and volume – button for 4 seconds. The LED flashes between red and blue. The headphones are permanently disconnected from all devices and immediately go into pairing mode. The Bluetooth mode switch off once the audio cable is plugged into the audio input.

Forced pairing mode: Press and hold multifunction for 5 seconds to enter the forced pairing mode directly when BH-11 EQz is unable to enter pairing mode.

• Warranty Information 1 Year*

If you have issue with our BH-11 EQz product please contact our service center.

Authorized Service Center Blaupunkt Speakers

Address: Envent World Wide Pvt. Ltd., KH NO-96/2, Village-Bamnoli, Sector-28, Dwarka, Bamnoli West, Delhi- 110077. E-Mail: wecare@blaupunkt-audio.in Tel: 1800 843 4333

Please prepare and submit the following information during the telephone or e-mail notification to facilitate the process: - Serial number - Date of purchase - A copy of proof of purchase in case of warranty

Note - Important information: Please use the original packaging or other suitable packaging to protect the unit in transit.