


## **ARIA+ MANUAL**

# OPN SOUND **USER MANUAL** Scan for more languages

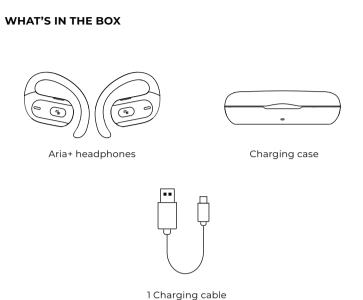

# **1** GETTING STARTED: CHARGE IMPORTANT: Remove the protective plastic covering on each of the earbud charging ports.









To power on, take ARIA+ out of the charging case. Your earbuds will automatically go into pairing mode.



Navigate to your devices Bluetooth® settings and select ARIA+.



**3** GETTING STARTED: WEAR






Slide the earhook behind your ear and rotate it down until the earpiece rests over the top of your ear.

### CONTROLS



- N Play/pause: Tap either earbud 1x
- ✓ Previous track: Tap left earbud 3x
- Next song: Tap right earbud 3x
- ()) Volume up: Tap right earbud 2x
- √ Volume down: Tap left earbud 2x



- Answer/end call: Press either earbud 1x
- Reject call: Press and hold either earbud for 2 secs
- Voice assistant: Press and hold either earbud for 3 secs

### **CHARGING CASE LED DISPLAY**



The battery level is displayed on the interior charging case screen. LED light will flash white when battery is below 10%.

### **SPECIFICATIONS**

Speaker type	Directional audio
Bluetooth	v5.3
Battery life	5 hours (15 hours with charging case)
Standby time	288 hours
Charge time	2 hours
Weight	20g / 63g
Frequency response	20Hz-20KHz
Sensitivity	105 ± 3dB
Waterproof rating	IPX5
Wireless range	33 ft (10 meters)

### **PRECAUTIONS**

- 1. Listening to loud music for a long time may cause discomfort. Please use medium volume when possible. Do not use high volume for long periods of time.
- 2. Using headphones will affect your perception of the surrounding environment. Pay attention when using headphones.
- 3. Do not remove or modify the headphones as this may cause damage or burn out.
- 4. Do not throw or twist on the headphones.
- 5. Keep headphones away from fire, hydration and high pressure equipment.
- 6. Not suitable for children under 3 yrs old. Contains small parts.
- 7. Do not classify headphones as household waste. Please send them to the local electrical equipment recycling station.
- 8. The charging pole piece has been treated for anti-corrosion, but seawater is highly corrosive. It is recommended to clean them after being in seawater.

Note: The company does not assume any responsibility for the loss of personal property caused by the violation of the above warnings.

### **ACTIVATE YOUR LIFETIME WARRANTY**



We've got you covered! Register your lifetime warranty here: opnsound.com/pages/warranty

### **EU DECLARATION OF CONFORMITY**

We, Conduction Labs Inc. DBA OPN Sound. of 4800 N Federal Hwy, Suite B200, Boca Raton, FL 33431 USA, declare under our sole responsibility that the device is in Conformity with the following relevant Union harmonisation legislation: Radio Equipment Directive (RED) 2014/53/EU

The complete declaration of conformity can be found here: https://opnsound.com/pages/documents

Frequency Range	Max. Transmit Power
2402 - 2480mHz	10 dBm EIRP



