


PSpice Model

NMOS

Infineon Technologies AG

IPC90N04S5L-3R3

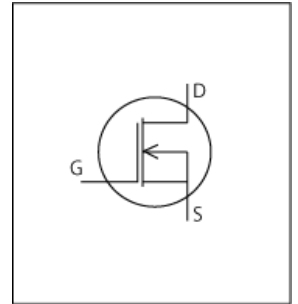

Model Information

Model A macro model based on BSIM3 model
Call Name MDC_IPC90N04S5L-3R3_PS
Pin Assign 1:S 2:S 3:S 4:G 5:D 6:D 7:D 8:D
File List Model Library MDC_IPC90N04S5L-3R3_PS01.lib
 Model Report MDC_IPC90N04S5L-3R3_PS.pdf (this file)

Verified Simulator Version PSpice version 16.6
Note

References

The information which was used for modeling is as follow:

[Data Sheet]

- Date/Version 2016-12-15 Rev. 1.0
- Product name IPC90N04S5L-3R3
- Company name Infineon Technologies AG
- Characteristics IdVgs[Temp], IdVds[Vgs], Rds(on)Id[Vgs], Crss, Coss, Ciss, VgsQg[Vdd], Rds(on)Temp[Vgs], VthTemp[Id], IsVsd[Temp], tdon, tdoff, tf, tr

Simulation Range


This table shows the range of evaluated simulation range that was not occurs any convergence problems in this area.

Item	Range			Unit
	Min.		Max.	
Drain-source voltage (DC)	0	to	40	V
Gate-source voltage (DC)	0	to	16	V
Temperature	-55	to	175	deg C

Simulation results are following.
 Explanatory notes — : simulated


IdVgs[Temp]

Vds = 6V

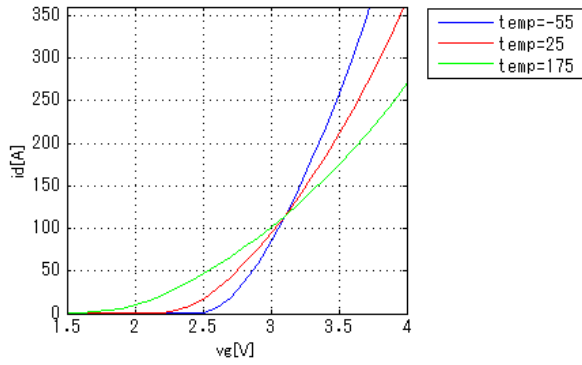


IdVds[Vgs]

Temp. = 25deg C

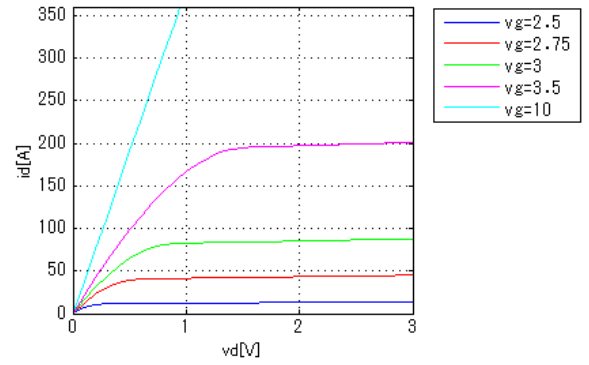


Rds(on)Id[Vgs]

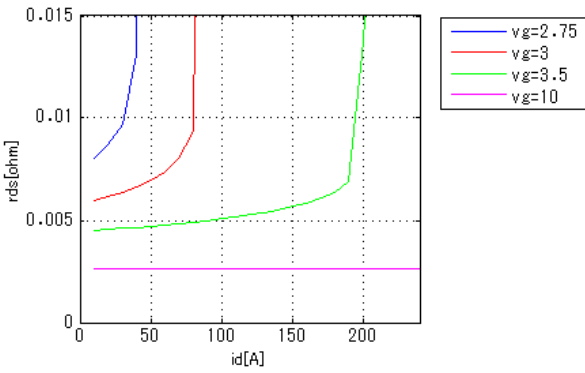


Crss

Freq. = 1MHz

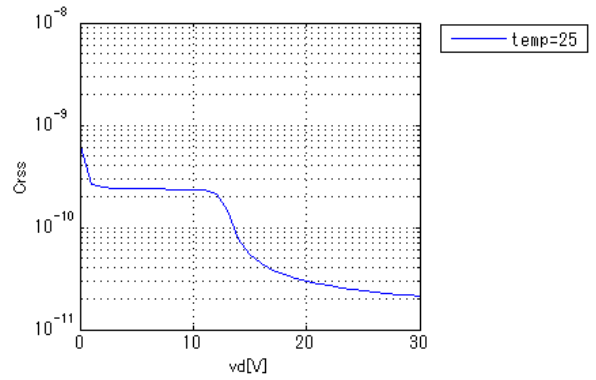


Coss

Freq. = 1MHz

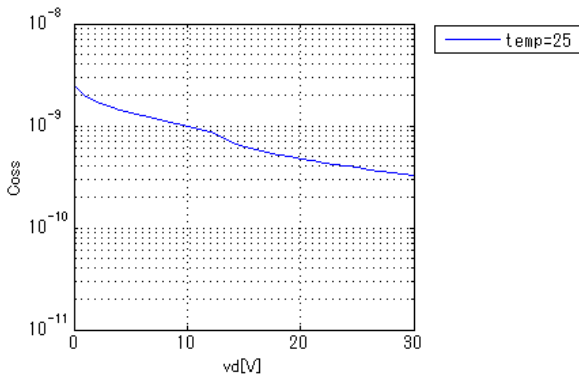

Ciss


Freq. = 1MHz

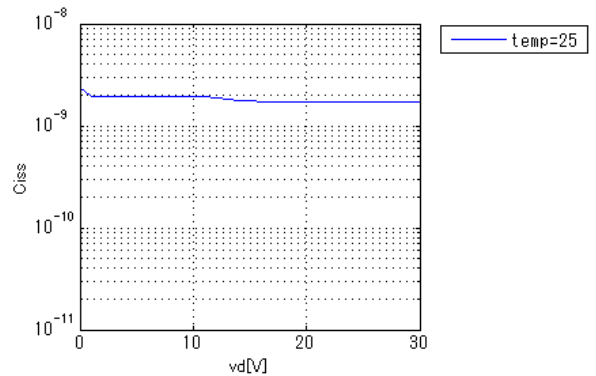

Simulation results are following.
 Explanatory notes — : simulated


VgsQg[Vdd]

Id = 90A

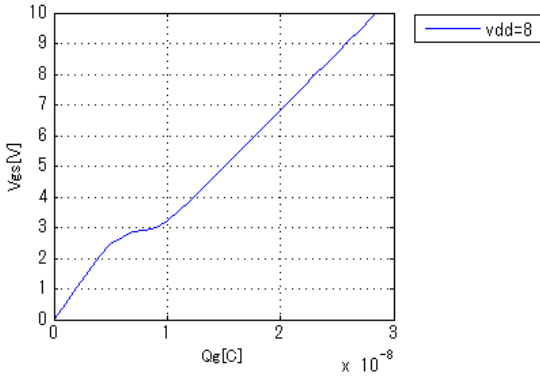


VgsQg[Vdd]

Id = 90A

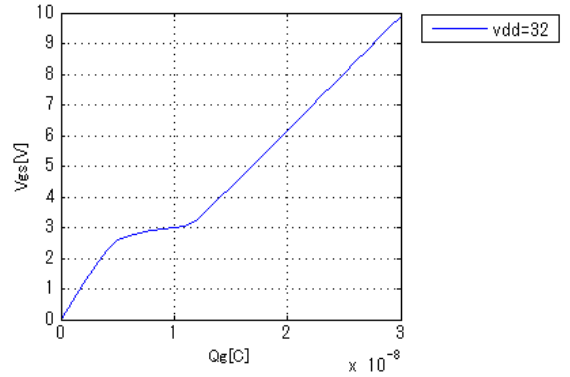


Rds(on)Temp[Vgs]

Id = 45A

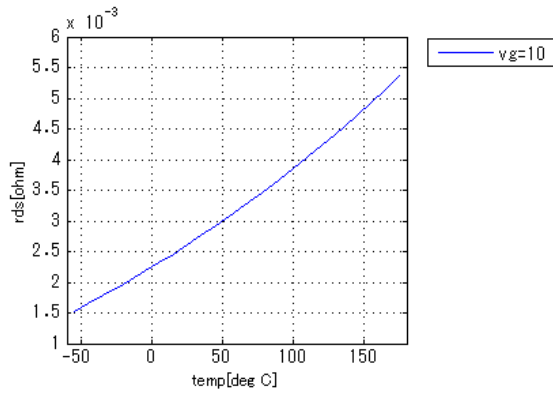


VthTemp[Id]

Vd = Vg

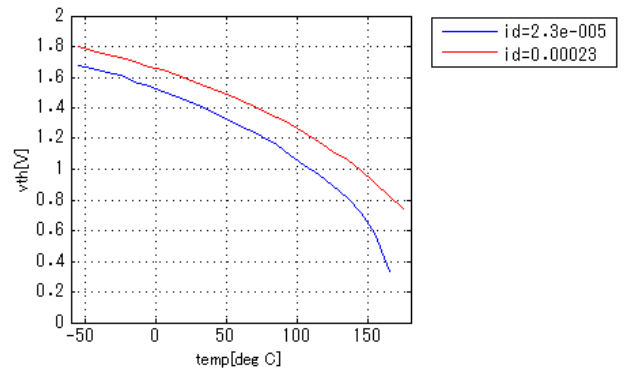


IsVsd[Temp]

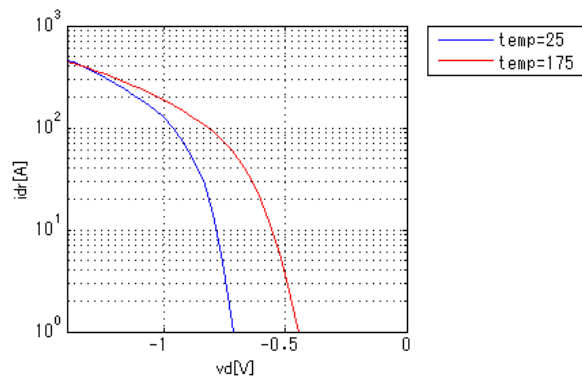

tdon


Vdd = 20V, Id = 90A, +Vg = 10V, -Vg = 0V, Rg = 3.5ohm

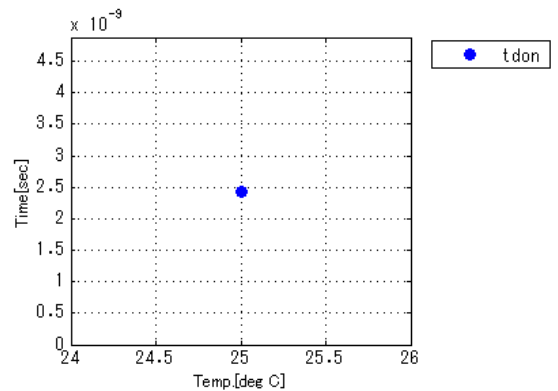

Simulation results are following.
 Explanatory notes — : simulated


tdoff

Vdd = 20V, Id = 90A, +Vg = 10V, -Vg = 0V, Rg = 3.5ohm

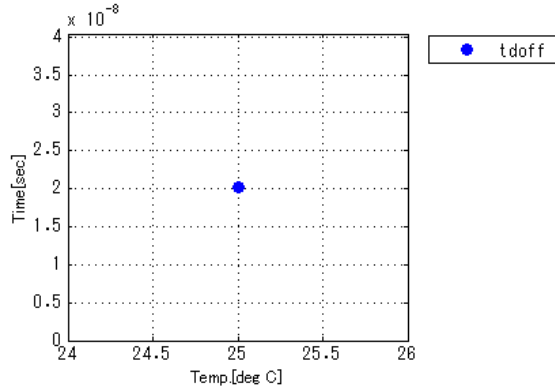


tf

Vdd = 20V, Id = 90A, +Vg = 10V, -Vg = 0V, Rg = 3.5ohm

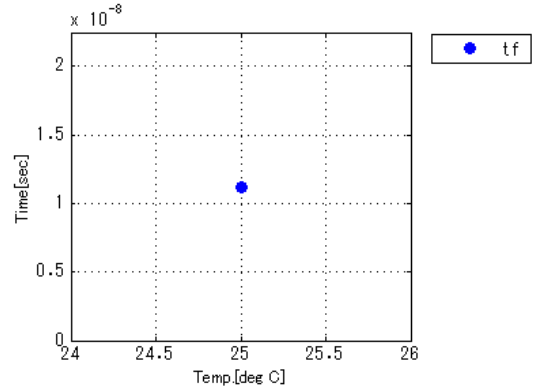

tr

Vdd = 20V, Id = 90A, +Vg = 10V, -Vg = 0V, Rg = 3.5ohm

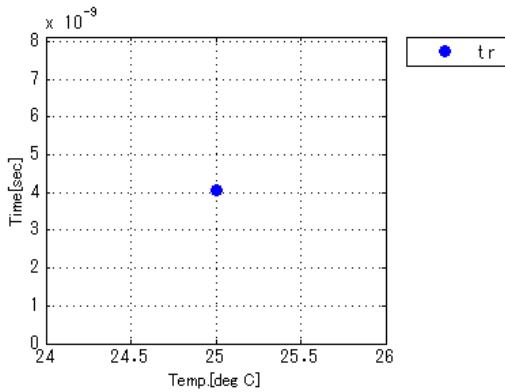

DISCLAIMER

1. This SPICE (Simulation Program with Integrated Circuit Emphasis) model and its content (the "Contents") are copyright of MoDeCH Inc. All rights reserved. Any redistribution or reproduction of any or all part of the Contents in any form is prohibited without express written permission made by MoDeCH Inc.
2. MoDeCH Inc. as licensor (the "Licensor") hereby grants to you, as licensee (the "Licensee"), a non-exclusive, non-transferable license to use the Contents as long as you abide by the terms and conditions of this DISCLAIMER.
3. The Licensee is not authorized to sell, loan, rent and redistribute or license the Contents in whole or in part, or in modified form, to anyone.
4. The Licensor shall in no way be liable to the Licensee or any third party for any loss or damage (including ,but not limited to, lost profits, or other incidental, consequential, or punitive damages), however caused (including through negligence) which may be directly or indirectly suffered from, arising out of, or in connection with, any use of the Contents .
5. Notwithstanding anything contained in this DISCLAIMER, in no event shall Licensor be liable for any claims, damages or loss which may arise from the modification, combination, operation or use of the Contents with the Licensee's computer programs.
6. The Licensor does not warrant that the Contents will function in any environment.
7. The Contents may be changed or updated without notice. MoDeCH Inc. may also make improvements and/or changes in the products, pricing and/or the programs related to the Contents at any time without notice.



MoDeCH Inc.

Head Office

Location:5-15 Yokoyama-cho, Hachioji-Shi, Tokyo 192-0081, Japan

Tel:+81-42-656-3360

E-Mail: model-on-support@modech.co.jp

URL: <http://www.modech.com/en/>