

Project 35mm universal shower mixer with divertor body



SPECIFICATION

SKU NRUB003P


WATERMARK LICENSE WM-060073


TEMPERATURE RATING MIN 1°C-MAX 75°C

PRESSURE RATING MIN 150KPa-MAX 500KPa

PACKING INCLUDES

- 1x mixer body






Dimensions are nominal measurements only.

Notes: Only Compatible for use with all Bianca and Mecca / Shower Mixers






Installation Instruction For Body

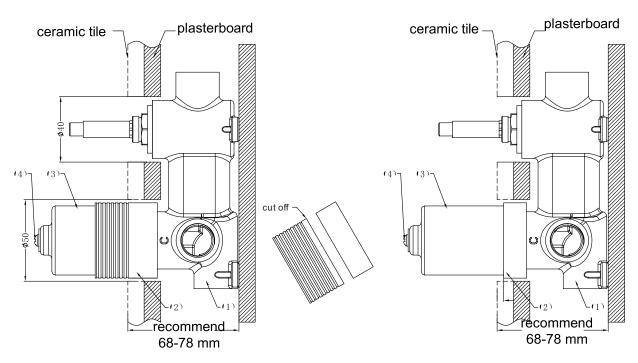


- 1. Fix body (1) on noggin and ensure installation depth is 68-78mm from noggin to ceramic tile surface .
- Caution: Do not take off plastic sleeve on body.
- 2. Connect cold water hose and hot water hose and conduct water pressure test for leak.
- 3.Install plasterboard after drilling a $\phi 50$ and a $\phi 40$ hole according to above picture.




7.Install sleeve onto divertor, do waterproof treatment for gap of plasterboard and body.


- 4. When the installation depth is 68-70mm, make a mark on plastic sleeve (2) at 2-4cm from ceramic tile surface to body.
- when the installation depth is 71-78mm,make a mark on plastic sleeve (2) at 4-7cm from ceramic tile surface to body.
- 5.Remove self-tapping screw, washer and plastic sleeve, and cut off the plastic sleeve from the mark.
- 6.Install self-tapping screw,washer and plastic sleeve successively.






Installation Instruction For Trim Kits

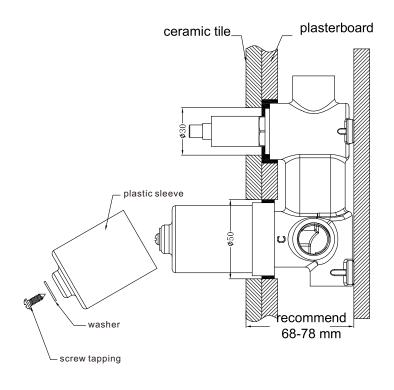

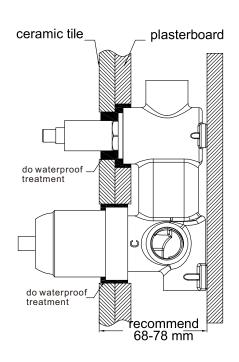

- 1.Install ceramic tile after drilling a ϕ 50 and a ϕ 30 hole according to above picture.
- 2.Take off self-tapping screw, washer, plastic sleeve.

- 3. Put on cartridge bell and sleeve.
- 4. Screw on dressing ring.
- 5.Do waterproof treatment for gap between ceramic tile and cartridge bell, sleeve.

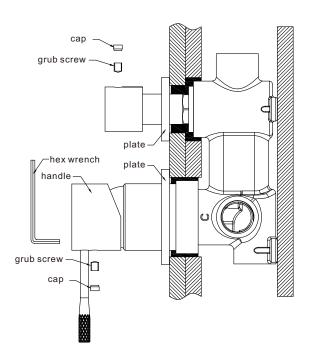

- 6.Put plates onto body.
- 7.Put washer onto cartridge stick, install handle, tighten grub screw of handle firmly by hex wrench, put cap into handle.
- 8. Put knob onto divertor cartridge, tighten grub screw of knob firmly by hex wrench, put cap into knob.