




# BOOM MIC - OPEN MIC/PTT HEADSET

## User's Manual

### SPECIFICATIONS

Bluetooth Protocol	Version 5.0
Noise Cancellation	CVC 8.0
Range	5 Meters
Frequency Band	2.4~2.48 GHz
	Unlicensed ISM Band
Talking Time	Up to 6 Hours
Standby Time	Up to 300 Hours
Weight	18 g
Battery	Li-ion Battery
	3.7 V/ 90 mAh
Charging	5~6 VDC/400 mA
Charging Time	Up to 1.5 Hour


### DIAGRAM

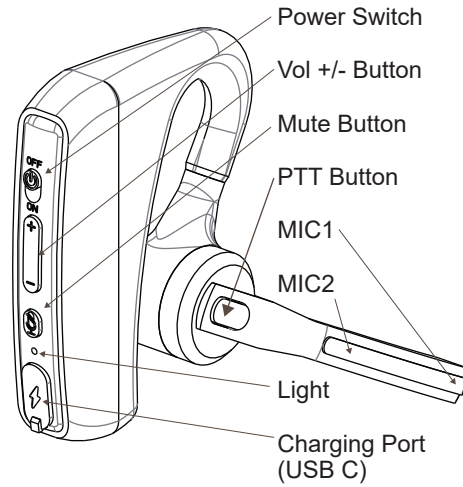

Vol+, SHORT click for volume increase  
 Vol -, SHORT click for volume decrease  
 MIC1 is for voice.  
 MIC2 is for noise cancellation.  
 Mute Button is not used.

2

### SWIVEL TO ADJUST

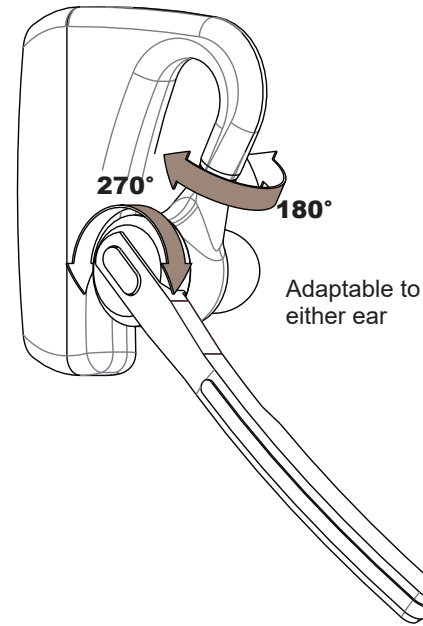

3

### OPEN-MIC/PTT

This headset can be either open-MIC or PTT (push-to-talk) depending on the setting of the radio that it pairs with. (Refer to "Yapalong-6000 User's Manual")

When the radio is in open-MIC mode, the user can talk directly without pushing the button.

When the radio is in PTT mode, the user needs to push the PTT button to talk.

**Note:** the transmission begins in 2 seconds after the PTT button is pressed.

### CHARGING

#### Light Indications:

- Solid Red, charging
- Solid Blue, charging is complete
- Flashing Red, battery is low (With 2 "beeps" every 5 seconds)

#### Notes:

- Please charge your Bluetooth headset FULLY if it is used for the first time.
- Charge once a month if the headset is not used often for longer battery life.

4

## PAIRING WITH YAPALONG

*Note: before starting, please turn off all the Bluetooth devices in the surroundings.*

Power on both the Yapalong6000 radio and the headset, and you will find any of the following 3 states of the green Bluetooth light on the RADIO, not the headset:

### State1 Off

It indicates that the radio has detected its paired headset. No pairing is required.

### State2 Flashing slowly

It indicates that the radio has a paired headset but cannot detect it. The radio will not pair in this state. Press both the Settings and Bluetooth buttons to remove the memory of the paired headset, the light will show the following state:

### State3 Flashing quickly

It indicates that the radio has no paired headset. It is ready to pair and will pair automatically.

5

## PAIRING WITH YAPALONG (Cont'd)

During pairing, make sure the headset is in pairing mode: it reports, "Pairing...", and its light is flashing red and blue alternately.

If the headset is not in pairing mode, please restart it.

After 5 seconds or more, the green Bluetooth light on the radio will be off, the headset will report "Connected", and the light on the headset will turn solid blue, which indicates both are paired.

## EAR TIPS

The following types of ear tips are provided:

- Half-in-ear tips  
small and large



- In-ear tips  
small and large




- Custom molded earplugs (not provided)  
It is for the most secure wear. Check details at [yapalong.com/products/earmolding](http://yapalong.com/products/earmolding)

6

## WEAR

This headset transmits low-power Bluetooth signals to the radio. Please wear the headset and the radio at the same side of your body to avoid body blocking to the Bluetooth signals.

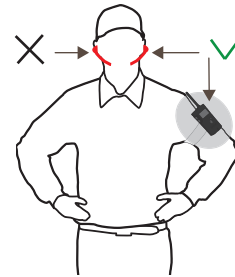

7

## USE WITH CELLPHONE

### Pairing

1. Power on the headset.  
The headset reports "Power On".  
The light flashes red and blue alternately.
2. Activate cellphone's Bluetooth function.  
Search for the available Bluetooth devices.
3. Select "Y-6000" from the list.  
"Y-6000" is shown in your Bluetooth device list once it is connected.  
The headset reports "Connected".

### Answer A Call

The headset will ring when a call dials in.  
Click the PTT button to receive the call.

### Play Music

Click the PTT button to play the music.  
Click again stop the music.  
LONG click Vol+ for the last song.  
LONG click Vol- for the next song.



7895 Tranmere Dr., Unit 13,  
Mississauga, Ontario L5S 1V9  
Canada  
[info@yapalong.com](mailto:info@yapalong.com)  
1-(905)-405-0300 V2