

Arlette 2 Light Globe Pendant

TP1092 | 1.0

GENERATION LIGHTING

Pendant

GENERAL PRODUCT INFORMATION:

These fixtures are intended to be installed utilizing NEC compliant junction boxes.

This product is safety listed for damp locations.


Incandescent lamps may be dimmed with a standard incandescent dimmer. LED lamps may be dimmed with a LED dimmer. Consult lamp manufacturer for additional information.

This instruction shows a typical installation.

CAUTION - RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Use minimum 90°C supply conductors.

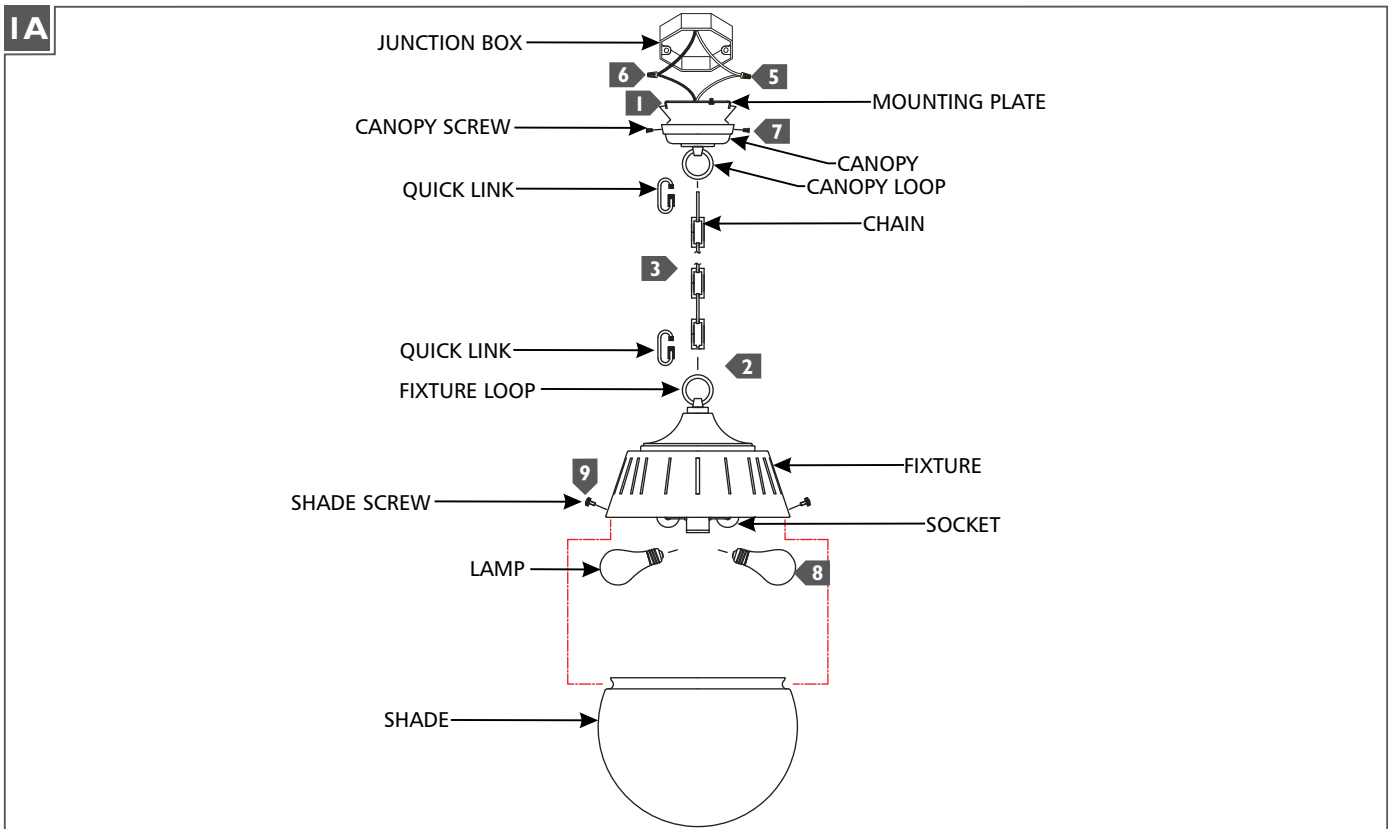

- 1 Secure the mounting plate to the junction box.
- 2 Install a quick link onto the end of the chain and fixture loop. Determine the wanted height of the fixture and remove a portion of the chain by opening a link and removing it from the top. Then install the other quick link onto the chain and the canopy loop.
- 3 Weave the cord through the chain and canopy and out of the junction box. Trim the cord leaving enough to make electrical connections.
- 4 Connect the fixture to a suitable ground in accordance to local electrical codes.
- 5 Connect the white fixture wire (square and/or rigid) to the neutral power line wire with a wire nut.
- 6 Connect the black fixture wire (round and/or smooth) to the hot power line wire with a wire nut.
- 7 Neatly place all the wires into the junction box, place the canopy onto the ceiling, and secure it in place with the provided canopy screws.
- 8 Screw the lamp into the socket. Refer to the label on the socket for Max Wattage information.
- 9 Gently Lift shade into the fixture, and secure in place with the provided screws.

SAVE THESE INSTRUCTIONS!

GENERATION LIGHTING

7400 Linder Ave, Skokie, IL 160077

800.969.3347

www.generationlighting.com

© 2019 Generation Lighting. All rights reserved.

The "Generation Lighting" graphic is a registered trademark of Generation Lighting. Generation Lighting reserves the right to change specifications for product improvements without notification.