

Brianna Linear Chandelier

EC10614 | **1.0**

GENERATION LIGHTING

Chandelier

GENERAL PRODUCT INFORMATION:

These fixtures are intended to be installed utilizing NEC compliant junction boxes.

This product is safety listed for damp locations.


Incandescent lamps may be dimmed with a standard incandescent dimmer. LED lamps may be dimmed with a LED dimmer. Consult lamp manufacturer for additional information.

This instruction shows a typical installation.

CAUTION - RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Use minimum 90°C supply conductors.

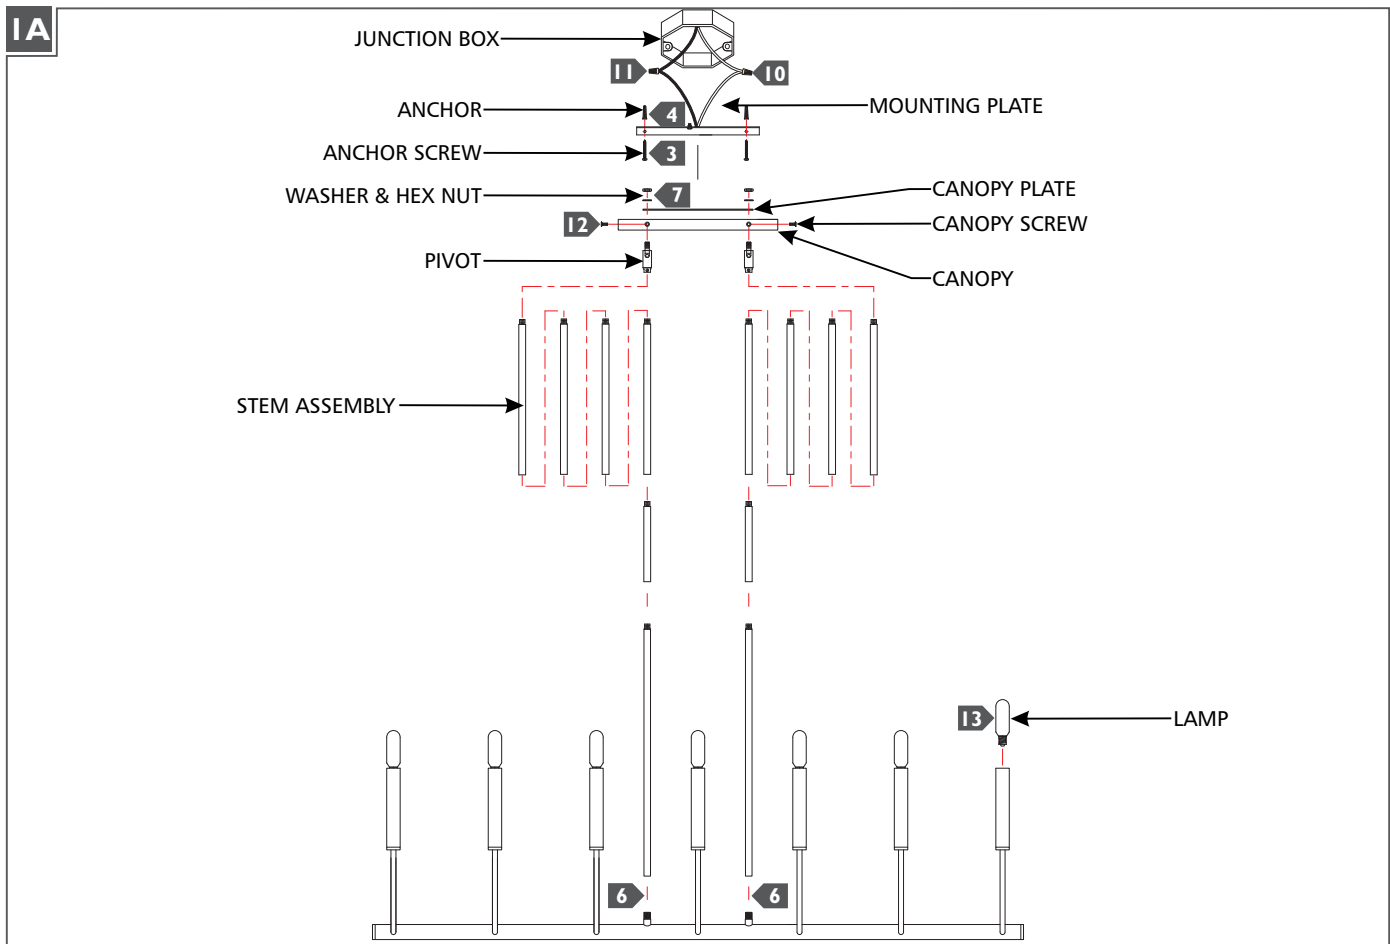

- 1** Temporarily install the mounting plate to the junction box.
- 2** Mark the anchor locations through the holes on the mounting plate, then remove the mounting plate.
- 3** Install the anchors to the marked points.
- 4** Secure the mounting plate to the junction box and screw the anchor screws into the anchors.
- 5** Determine the wanted height or look of the fixture with the provided stems and pivots, then assemble them by screwing them together.
- 6** Feed the cords through the stem assemblies, then screw the stem assemblies to the top of the fixture.
- 7** Feed the cords through the canopy, canopy plate, washers, and nuts (in order shown), then place them onto the swivels and secure them together with the hex nuts.
- 8** Pull the power line wires out of the junction box. Trim the cord leaving enough to make electrical connections.
- 9** Connect the fixture to a suitable ground in accordance with local electrical codes.
- 10** Connect the white fixture wire (square and/or rigid) to the neutral power line wire with a wire nut.
- 11** Connect the black fixture wire (round and/or smooth) to the hot power line wire with a wire nut.
- 12** Neatly place all the wires into the junction box, place the canopy onto the mounting plate, and secure it in place with the canopy screws.
- 13** Screw the lamps into the sockets. Refer to the label on the lamp socket for Max Wattage information.

SAVE THESE INSTRUCTIONS!

GENERATION LIGHTING

7400 Linder Ave, Skokie, IL 160077

800.969.3347

www.generationlighting.com

© 2019 Generation Lighting. All rights reserved.

The "Generation Lighting" graphic is a registered trademark of Generation Lighting. Generation Lighting reserves the right to change specifications for product improvements without notification.