

# Freeport Outdoor Post

CO1191, CO1201 | 1.0

GENERATION LIGHTING

## Post

### GENERAL PRODUCT INFORMATION:

This product is safety listed for wet locations.

Incandescent lamps may be dimmed with a standard incandescent dimmer. LED lamps may be dimmed with a LED dimmer. Consult lamp manufacturer for additional information.

This instruction shows a typical installation.

### CAUTION - RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Use minimum 90°c supply conductors.

GENERATION LIGHTING


7400 Linder Ave, Skokie, IL 160077

800.969.3347

[www.generationlighting.com](http://www.generationlighting.com)

© 2020 Generation Lighting. All rights reserved.


The "Generation Lighting" graphic is a registered trademark of Generation Lighting. Generation Lighting reserves the right to change specifications for product improvements without notification.

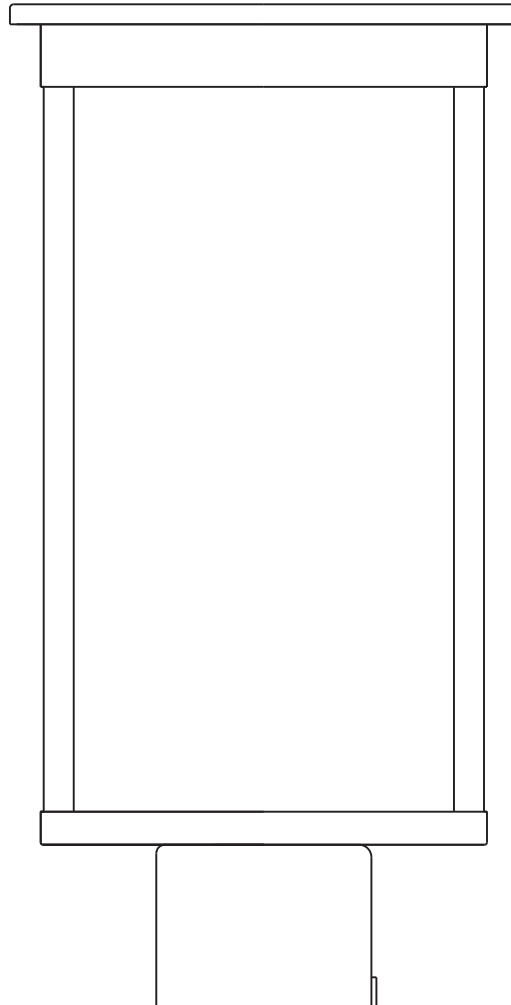

**SAVE THESE INSTRUCTIONS!**

## Install the Fixture

IA

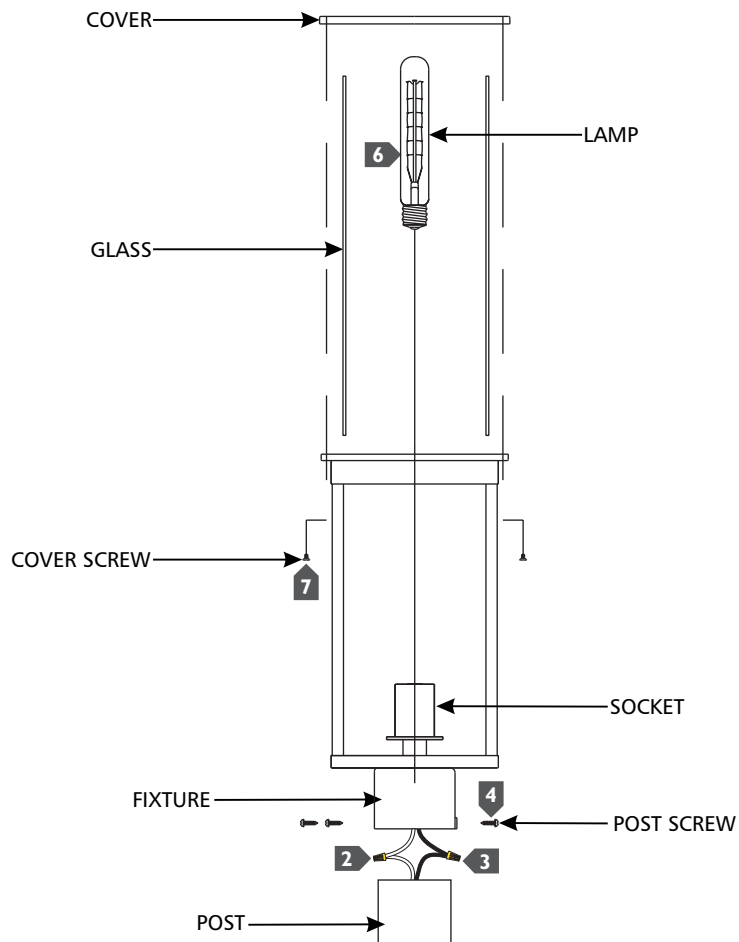

- 1** Connect the fixture to a suitable ground in accordance with local electrical codes.
- 2** Connect the white fixture wire to the neutral power line wire with a wire nut.
- 3** Connect the black fixture wire to the hot power line wire with a wire nut.
- 4** Secure the fixture to the post with the post screws making sure to neatly tuck in all wiring.
- 5** Install the glass by carefully inserting them into the fixture frame and bending the tabs to secure in place.
- 6** Screw the lamp into the socket. Refer to the label on the lamp socket for Max Wattage Information.
- 7** Install the cover to the fixture and secure in place using the cover screws.