

Component Parts

- A Fixture
- **B** Fixture Coupling
- C Crossbar
- **D** Jam Nut
- **E** Threaded Nipple
- **F** Ground Screw
- **G** Canopy Ring
- H Canopy
- I Swivel
- J 3" Fixture Pipe (1)
- K 6" Fixture Pipe (1)
- L 12" Fixture Pipe (2)
- M Double Pipe Coupling (3)
- N Socket (16)
- O Bulb (16) (not included)
- P Retaining Ring Cover (16)
- **Q** Glass (16)

ASSEMBLY & INSTALLATION INSTRUCTIONS

Ensemble Orb 134516

CAUTION: FAILURE TO INSTALL THIS FIXTURE PROPERLYMAY RESULT IN SERIOUS PERSONAL INJURY OR DEATH AND PROPERTY DAMAGE. We recommend installation by a licensed electrician. This product must be installed in accordance with applicable installation code(s), by a person familiar with the construction and operation of the product and the hazards involved.*

Caution: Do not exceed maximum wattage noted on fixture. Use only recommended bulbs with fixture.

Please Note: After installation extra hardware and accessories are possible due to our kits are used on multiple products and options.

To Install Fixture

CAUTION: BE SURE POWER IS OFF AT THE MAIN BREAKER BOX PRIOR TO INSTALLATION.

- 1. Carefully unpack fixture from the carton.
- 2. Thread jam nut (D) and crossbar (C) onto threaded nipple (E) with ground screw (F) facing towards swivel (I); leave both parts loose.
- 3. Using two machine screws (not provided), temporarily fasten crossbar (C) to the electric box.

NOTE: A NEW ELECTRIC BOX COMES WITH SCREWS. WHEN REPLACING A FIXTURE, RETAIN THE EXISTING SCREWS FOR USE WITH THE NEW FIXTURE.

- 4. Adjust the length of threaded nipple (E) in crossbar (C) so that canopy ring (G) will hold canopy (H) against the ceiling with no threads showing for best appearance. When the correct adjustment is established, tighten jam nut (D) against crossbar (C) to hold the adjustment.
- 5. Remove crossbar (C) from the electrical box and proceed with the assembly instructions.
- 6. Locate fixture pipes (J, K, L), fixture (A) and coupling (M). Coupling (M) is shipped threaded into the pipes (J, K, L).
- 7. Provided are multiple fixture pipes in three different lengths. Choose the combination that will acheive the overall height desired. Refer to the table below to determine the pipes required to reach the desired overall height. Once you have determined the components necessary, feed the wires that exit fixture coupling (B) through the individual components and thread pipes and couplings together. Wires will slip easier through loose components than through pipes and couplings that are pre-assembled.

		Overall Height of Fixture							
		29.7"	32.9"	35.9"	39.1"	41.9"	45.1"	48.1"	51.3"
# of Pipes Required	3" Pipe (J)		1		1		1		1
	6" Pipe (K)			1	1			1	1
	12" Pipe (L)	1	1	1	1	2	2	2	2

- 8. Carefully slide canopy ring (G) and canopy (H) over wires and fixture pipes (J, K, L) until they rest on fixture (A).
- 9. Slip wires from the fixture coupling (B) through assembled swivel (I), thread swivel onto final pipe. It may be neccesary to remove a coupling (M) for this to work on shorter overall fixture heights.
- 10. Refer to instructions on next page to continue installation.



To Install Fixture (Figure 1) continued


- 11. Using two machine screws (not provided), fasten crossbar (C) to the electric box.
- 12. Using suitable wire connectors (not provided) connect fixture wires to supply (white to white and black to black). Attach a pigtail lead to crossbar ground screw (F). Hold canopy (H) close, connect all ground wires (bare copper or green to bare copper or green).

CAUTION: MAKE SURE WIRE CONNECTORS ARE TWISTED ON SECURELY, AND NO BARE WIRE IS EXPOSED.

13. Slide canopy (H) against ceiling, and secure with canopy ring (G).

CAUTION: BE SURE NO WIRES ARE PINCHED BETWEEN CANOPY (H) AND THE CEILING.

14. Refer to instructions on next page to complete installation.

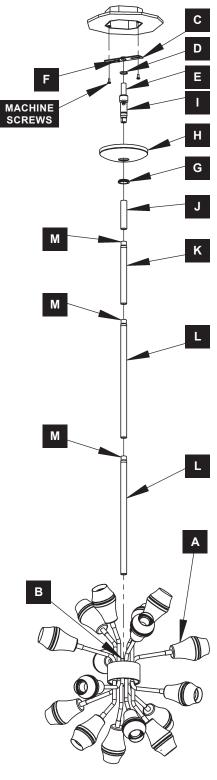

(Figure 1)


Ensemble Orb 134516

To Complete Installation (Figure 2)

- 1. Remove retaining ring cover (P) from socket; covers are shipped installed on fixture (A).
- 2. Carefully unpack glass (Q). Place glass (Q) over socket (N) and secure with retaining ring cover (P).

NOTE: BE CAREFUL NOT TO CROSS THREAD OR OVERTIGHTEN AND BREAK GLASS.

- 3. Install bulb (O) (not included) into socket (N).
- 4. Repeat for remaining glass (Q) and sockets (N).
- 5. Restore electricity at the main breaker

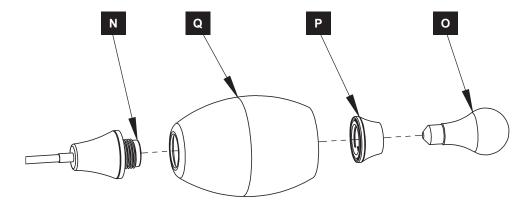

(Figure 2)

If you need further assistance, or find that you are missing any parts, please contact the dealer from which you purchased this product. We hope you enjoy your fixture!

* Hubbardton Forge will not be liable for injury or damage caused by improper installation, lamping or use of this fixture.

