

## **GENERAL PRODUCT INFORMATION:**




This product is suitable for indoor dry locations only.


This product should be used with Tech Lighting Kable Lite turnbuckles at the other end.




## **Install the Slimline Anchors**

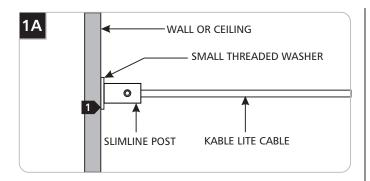


Use the small threaded washer when the Kable Lite cable is attached inline to the slimline post.

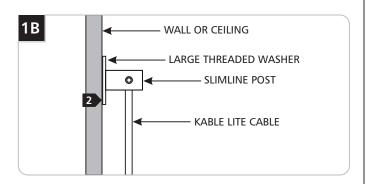


Use the large threaded washer when the Kable Lite cable is attached at an angle to the slimline post.




- **3** Select the right location for the anchors to be mounted.
- Decide the Kable Lite cable separation. 1" is the minimum separation allowed (use the small threaded washer in this case).
- Mark the location of the anchors on the wall or ceiling. The distance between the center points of the anchors should be the desired Kable Lite cable separation.
- Tap the anchors at the marked point up to the threaded portion with a hammer.

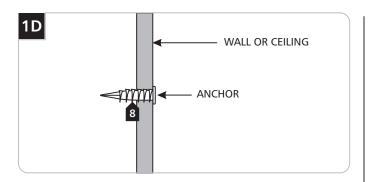


8 Screw the anchors in the rest of the way with a Phillips screwdriver.

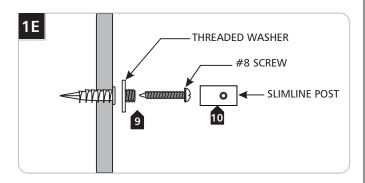

- 9 Attach the threaded washer to the anchor with the #8 screw.
- 10 Screw the slimline posts onto the threaded washers.



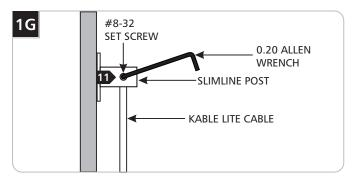

Insert one end of the Kable Lite cable into the slimline post and tighten the #8-32 set screws with the 0.20 Allen wrench to secure the wire. The other end of the cable should be attached to a turnbuckle.

## **SAVE THESE INSTRUCTIONS!**



7400 Linder Ave, Skokie, IL 60077 847.410.4400

## www.techlighting.com

© 2008 Tech Lighting, L.L.C. All rights reserved. The "Tech Lighting" graphic is a registered trademark of Tech Lighting, L.L.C. Tech Lighting reserves the right to change specifications for product improvements without notification.

A Generation Brands Company