

Belcarra Vanity

DJV1011, DJV1012, DJV1013, DJV1014 | 1.0

VISUAL COMFORT & Co.

STUDIO COLLECTION

GENERAL PRODUCT INFORMATION:

These fixtures are intended to be installed utilizing NEC compliant junction boxes.

This product is safety listed for damp locations.

Incandescent version may be dimmed with a standard incandescent dimmer.


LED version may be dimmed with a LED dimmer. Consult lamp manufacturer for additional information.

This instruction shows a typical installation.


CAUTION - RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

SAVE THESE INSTRUCTIONS!

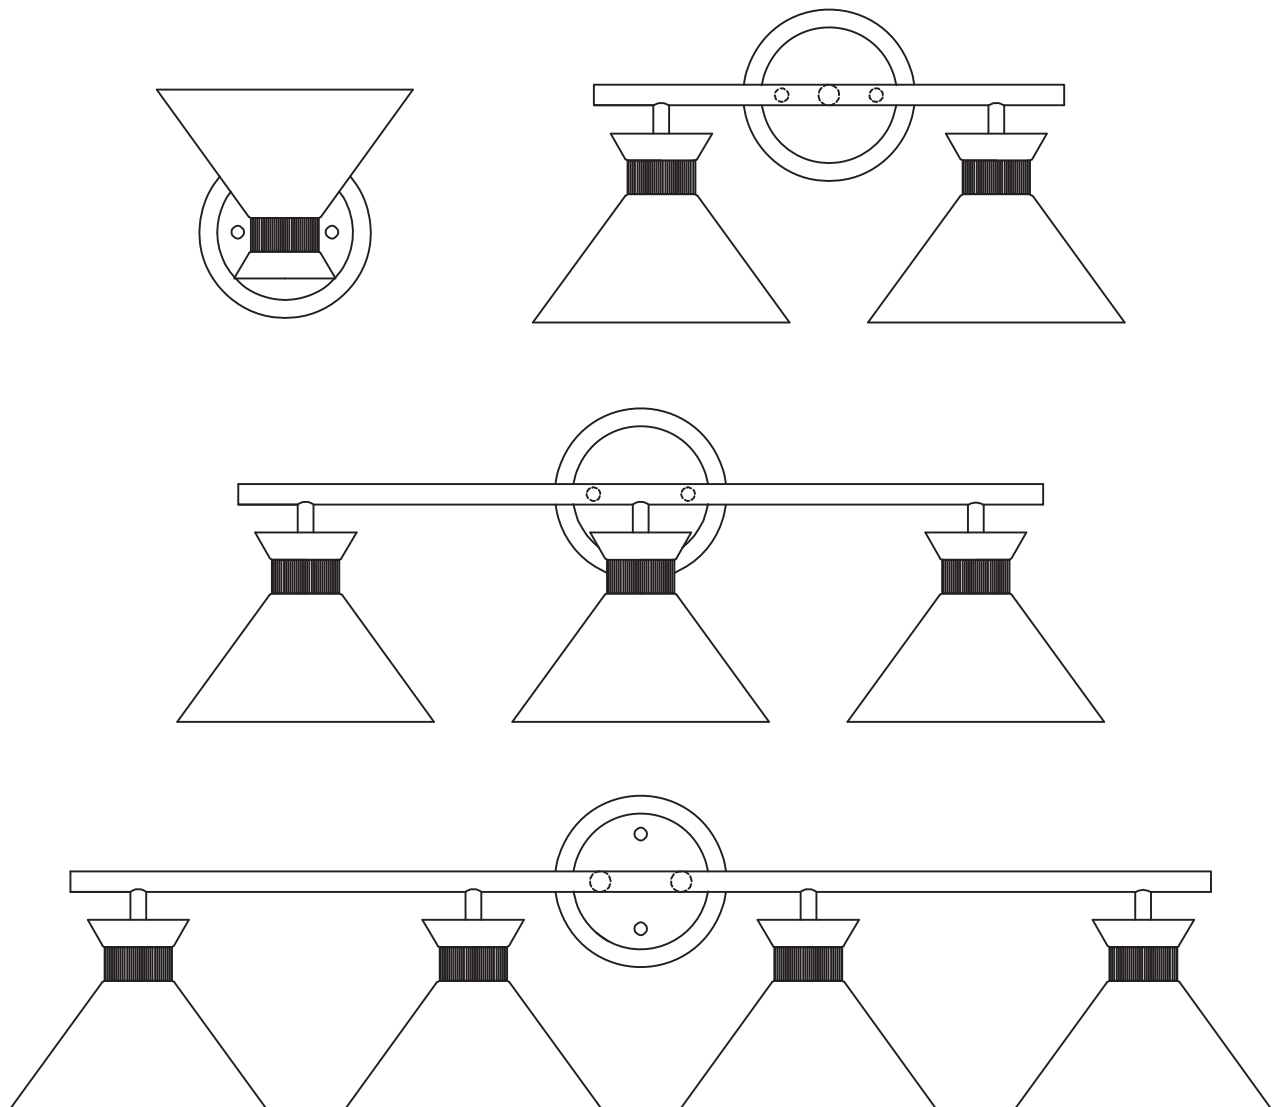

Install the Fixture

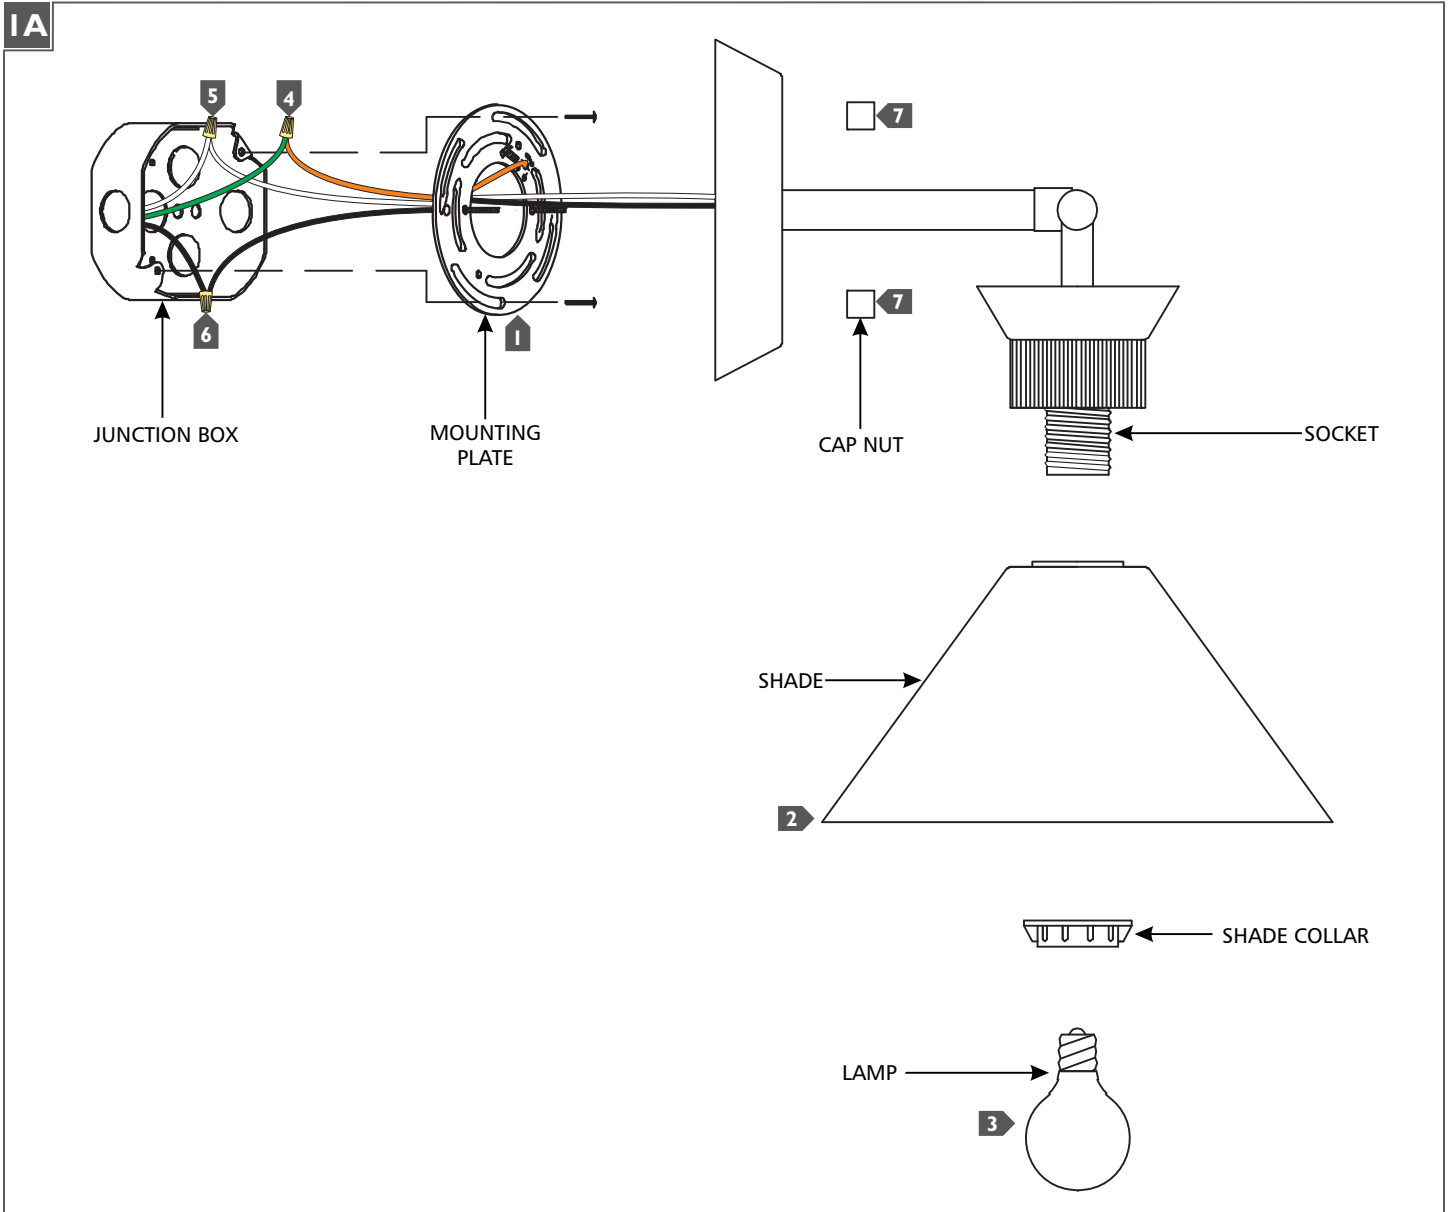

- 1 Secure the mounting plate to the junction box.
- 2 Install the shade(s) by sliding it over the socket and secure the shade(s) in place with the shade collar(s).
- 3 Screw the lamp(s) into the socket(s). Refer to the label on the lamp socket for Max Wattage Information.
- 4 Connect the fixture to a suitable ground in accordance with local electrical codes.
- 5 Connect the white fixture wire (square and/or rigid) to the neutral power line wire with a wire nut.
- 6 Connect the black fixture wire (round and/or smooth) to the hot power line wire with a wire nut.
- 7 Neatly place all the wires into the junction box, place the fixture base onto the mounting plate, and secure it in place using the cap nuts.