

# Largo Pendant

TP1161 | 1.0

## GENERATION LIGHTING PENDANT

### GENERAL PRODUCT INFORMATION:

These fixtures are intended to be installed utilizing NEC compliant junction boxes.

This product is safety listed for damp locations.

Incandescent version may be dimmed with a standard incandescent dimmer. LED version may be dimmed with a LED dimmer. Consult lamp manufacturer for additional information.


This instruction shows a typical installation.

### CAUTION - RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

**Use minimum 90°C supply conductors.**


**SAVE THESE INSTRUCTIONS!**

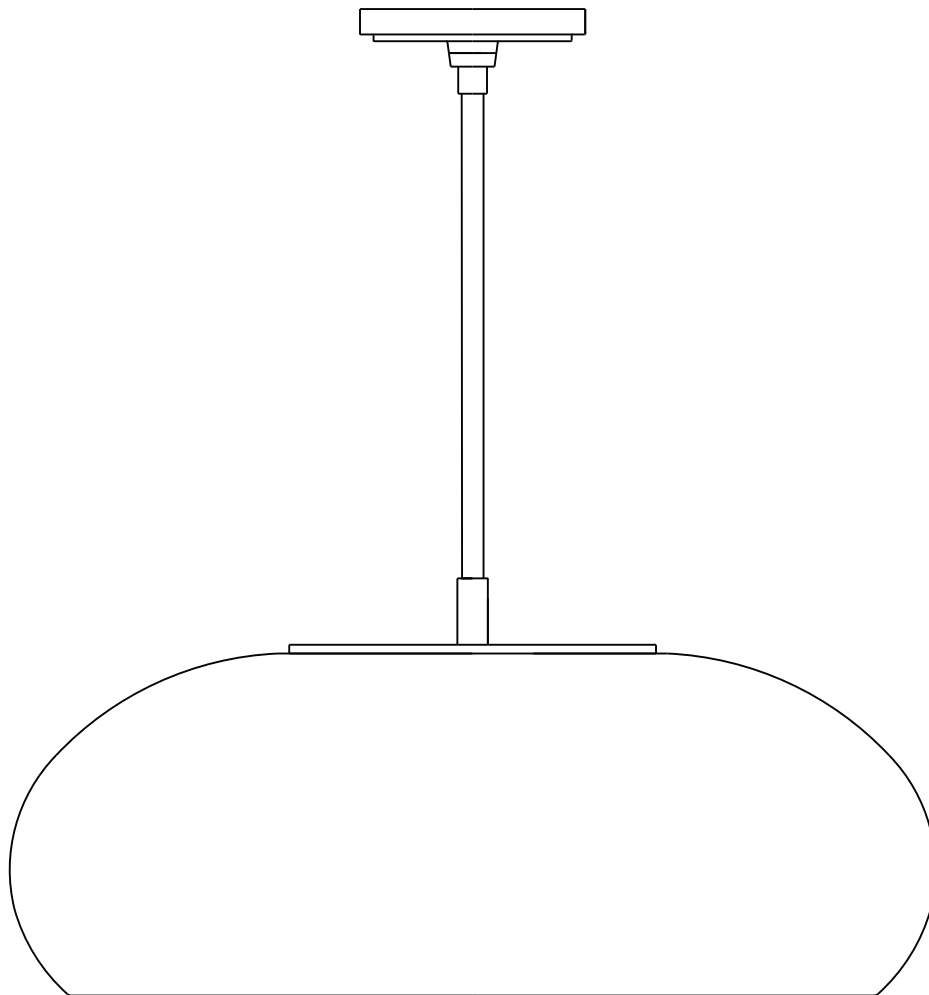

GENERATION LIGHTING  
7400 Linder Ave., Skokie, IL 60077  
T 847.410.4400 | F 847.410.4500  
www.generationlighting.com

# Install the Fixture

1A

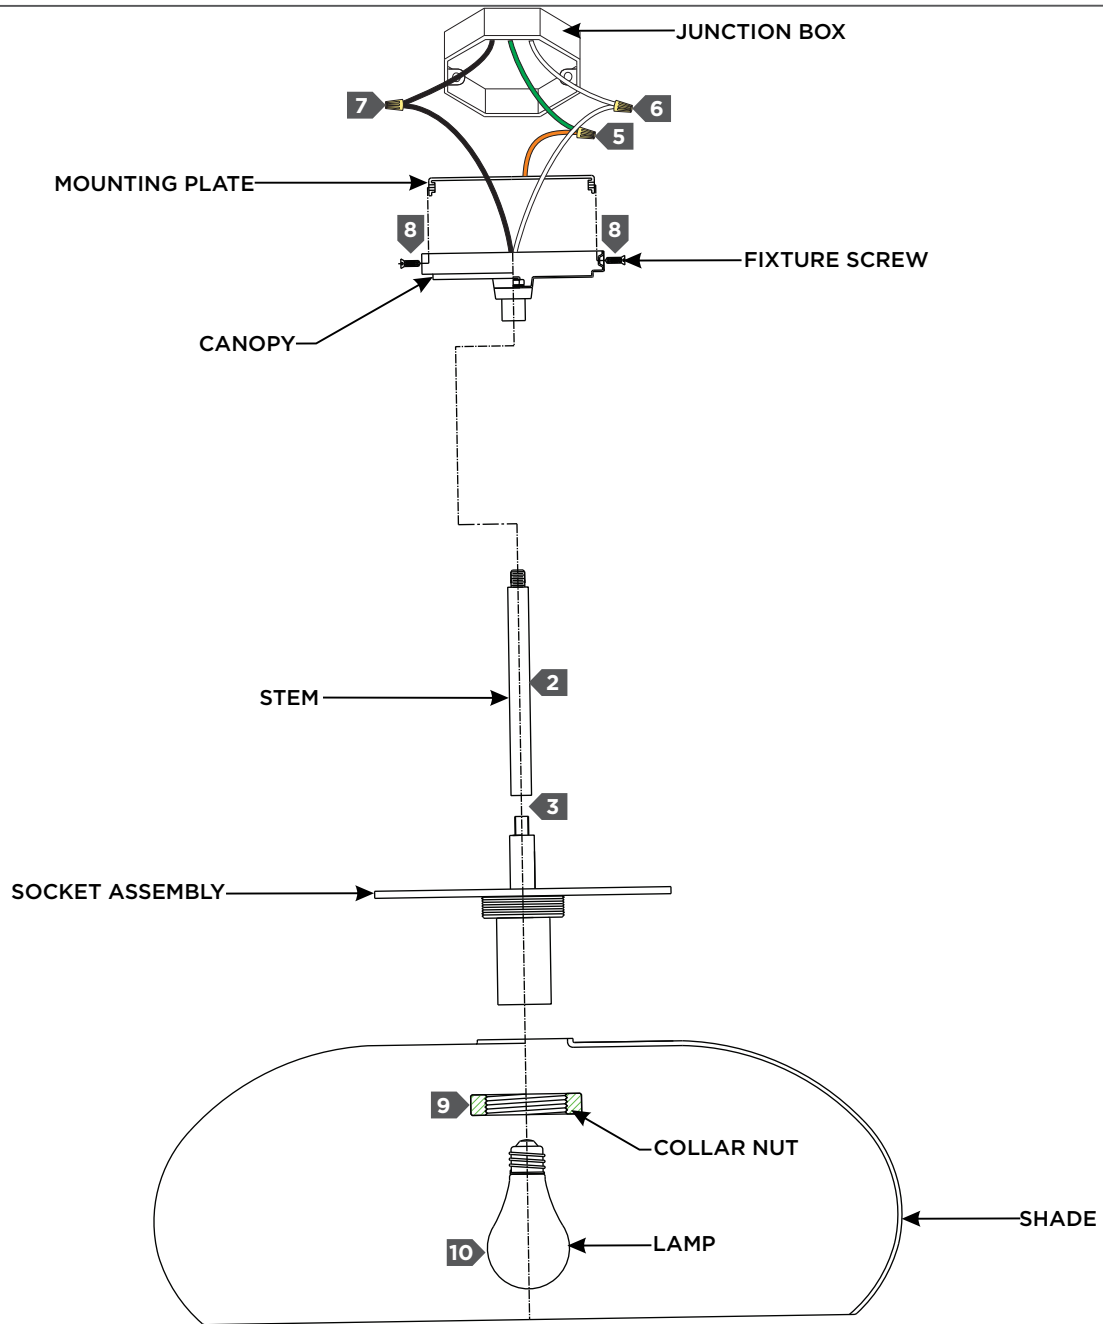

- 1** Secure the mounting plate to the junction box.
- 2** Determine the wanted height or look of the fixture with the decorative stems, then assemble them by screwing them together.
- 3** Feed the fixture wires through the stem assembly, then screw the stem assembly on to the top of the socket assembly.
- 4** Weave the cord through the canopy and out of the junction box. Trim the cord leaving enough to make electrical connections.
- 5** Connect the fixture to a suitable ground in accordance to local electrical codes.
- 6** Connect the white fixture wire (square and/or rigid) to the neutral power line wire with a wire nut.
- 7** Connect the black fixture wire (round and/or smooth) to the hot power line wire with a wire nut.
- 8** Neatly place all the wires into the junction box, place the canopy onto the mounting plate, and secure it in place using the fixture screws.
- 9** Place the shade over the socket and secure it in place by screwing the collar nut onto the socket.
- 10** Screw the lamp into the socket. Refer to the label on the lamp socket for Max Wattage Information.