


BluDento®

B1

WIRELESS MUSIC RECEIVER

USER MANUAL

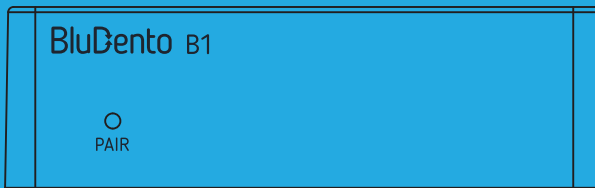

TROUBLE SHOOTING TIPS

01/ B1 is connected but the LED light does not light up. Verify that the power adapter is connected to the B1 and plugged into a functioning AC outlet.

02/ My device will not pair with B1. Verify that Bluetooth on the device is turned on. Confirm that the B1 LED light is blinking in pairing/discovery mode. Make sure your device is within range of B1 (33 feet).

03/ The B1 LED light is solid but I cannot connect my device. Make sure no other devices are connected. If so, either disconnect or turn off Bluetooth on the other devices.

04/ B1 LED light is solid and my device is connected but no audio output or the volume output level seems low. Confirm that the B1 output is correctly connected to your audio system. Make sure the audio source is correctly selected on your music system (analog or digital optical/coaxial input). Check the volume levels on your device. Also check the volume level on your powered speakers or stereo system. Confirm audio cable is correctly and firmly

connected to the receiver. Confirm the stereo volume is set to a comfortable listening level. Confirm you are within range of the receiver. Confirm that the audio source selection of your amplifier is correct with your audio connection (L/R RCA auxiliary audio or digital optical/coaxial audio).

05/ Out of range or lost signal. If the music device is out of range beyond 33 feet of the Bluetooth music receiver or if there is something blocking the Bluetooth signal, the LED light will flash slowly to indicate that the Bluetooth connection with the music device has been lost.


To avoid a lost connection:

A. Move the music device back into range within 33 feet and make sure there's a clear line of sight and there are no obstructions between the Bluetooth receiver and the device.

B. Within 2 minutes, the connection will automatically be reestablished and the LED light will turn on. If the connection is lost for more than 2 minutes, the connection will need to be reestablished.


INTRODUCTION

Thank you for purchasing BluDento B1. The B1 is a Bluetooth capable audio receiver that connects non-Bluetooth speakers to your smart phone, tablet or PC. The B1 supports Bluetooth Low Energy and aptX technology for delivering CD quality audio through your speakers or headphones. Analog stereo L/R RCA as well as S/PDIF TOSLINK and coaxial outputs are included for superior music quality. The B1 is powered by DC5V through the supplied micro USB power cable.

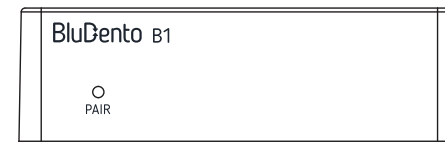

CONNECTING TO SPEAKERS

01/ Power on B1 receiver by plugging the micro USB cable into the receiver and the power plug into your power outlet. B1 will automatically go into pairing mode and the LED light on the front panel will flash slowly to show the unit is powered and ready to be paired.

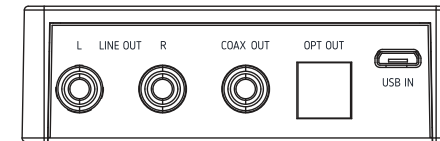

02/ Connect the B1 on an auxiliary analog input or digital one of your HiFi amplifier, A/V receiver or DAC then select analog or digital input on them.

03/ Connect the B1 receiver to your speakers by using the digital optical TOSLINK audio cable, digital coaxial audio cable, RCA auxiliary audio cable, or RCA cable with 3.5mm to RCA auxiliary cable adapter.

04/ SETUP OPTIONS:

OPTION 1:

Using RCA auxiliary audio cable

OPTION 2:

Using RCA auxiliary audio cable+ RCA to 3.5mm auxiliary cable adapter

OPTION 3:

Using an optical digital audio cable

OPTION 4:

Using a coaxial digital audio cable (not included)