

Operating Instructions

EN | 3S-1592 3SIXT Hydra Bluetooth Speaker – S

EN | 3S-1593 3SIXT Hydra Bluetooth Speaker – M

EN | 3S-1594 3SIXT Hydra Bluetooth Speaker – L

INCLUSIONS:

Hydra Speaker

Charging Cable

3SIXT Global Warranty Document

WARNINGS

- Read all instructions and warnings before using this product. Improper use of this product may result in product damage, excessive heat, toxic fumes, fire or explosion, for which damages you ("Purchaser") and not 3SIXT ("Manufacturer") are responsible.
- Do not store the accessory in a high-temperature environment, including heat caused by intense sunlight or other forms of heat (heaters etc.).
- Do not place the device in fire or other extremely hot environments.
- Do not disassemble or modify this accessory in any manner.
- Do not attempt to power this device using any other method than as instructed explicitly in this user guide.
- Be sure to unplug cables from the battery when finished departing your vehicle. Failure not to follow this warning is the sole responsibility of the purchaser, who agrees to indemnify the Manufacturer ("3SIXT").
- This accessory is intended for adults and not minors. Failure not to follow these warnings is the sole responsibility of the purchaser, who agrees to indemnify the Manufacturer ("3SIXT") for any unintended use/misuse by a minor.
- All products must pass through a thorough quality inspection at the time of manufacture. However, if you find that your device is excessively hot, is found to be deformed outside its regular appearance or is emitting smoke, immediately stop using the device and contact 3SIXT.

© 2020 3SIXT. All rights reserved.

This product may be covered by one or more patents or pending patent applications. Designed in Australia by 3SIXT. 23/136 Keys Road, Cheltenham VIC 3192 Australia.

The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc.

MADE IN CHINA




www.3sixtgear.com
or visit www.3sixtgear.com/support



3SIXTgear

NAME PARTS

1. Loop
2. Volume Up/Skip Forward
3. TWS Pairing Mode
4. Charging Port Cover
5. Play/Pause
6. Mode Switch
7. Volume Down/Skip Back
8. Power On/Off/LED
9. Built-in Mic

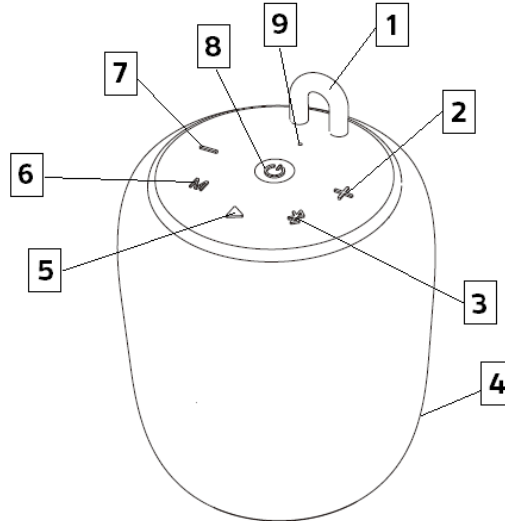

OPERATION

Charging up your Hydra Speaker

1. Locate the provided USB-A to Micro USB Cable.
2. Locate the Micro USB input (4) on the Hydra speaker.
3. Make sure that the Micro USB input (4) is clear of obstruction (dirt/dust etc).
4. Plug the USB-A end of the cable into your BYO wall or car charger making sure to lightly push it in (do not push with excessive force).
5. Plug the Micro USB end into the Hydra Speaker's Micro USB input (4) and push home making sure it is connected (do not push with excessive force).
6. Turn power on at the power source. A small LED will illuminate next to the Micro USB port indicating that it is charging successfully. The small LED will extinguish when the Hydra speaker is fully charged and is ready to be used.
7. To stop charging simply remove your charging cable from the Hydra speaker Micro USB port (4) or turn off at the wall charger. Make sure to replace the charging port cover (4) to keep the unit sealed from water ingress.
8. If the Hydra speaker sits idle charging and not playing music, it will automatically turn itself off to conserve power after 10 minutes.

Powering On

1. Locate the Power On/Off button on the top of the Hydra speaker (8).
2. Press and hold the Power On/Off button (8) for 3 seconds to turn on.
3. The Hydra speaker will make an audible sound and immediately activate pairing mode. The LED located on the power On/Off button (8) will flash on/off in second intervals.

Powering Off

1. Locate the Power On/Off button on the top of the Hydra speaker (8).
2. Press and hold the Power On/Off button (8) for 2 seconds to turn off.
3. The Hydra speaker will make an audible sound and shut down.



BT Pairing (first time)

1. Follow 'Powering On' directions from step 1 to 3.
2. Locate your Bluetooth settings menu on your device and make sure it is on. Search for your specific 'Hydra Speaker'.
3. Once located select the Hydra Speaker and auto pairing should occur. If prompted for a password, input "0000".
4. If successfully paired the Hydra speaker will make an audible sound and the LED next to the Power On/Off button (8) will remain solid.

BT Unpairing

1. Locate your Bluetooth settings menu on your device and search for 'Hydra speaker'.
2. Locate the settings or information setting within your paired device and select "unpair or forget this device".
4. The Hydra Speaker will make an audible sound to indicate it has unpaired and will resume pairing mode with the LED next to the Power On/Off button flashing 1 second On/Off

TWS Pairing (first time)

1. Two of the same model Hydra speakers are required for this function.
2. Make sure to unpair your device/s from the Hydra speakers.
3. Power on both Hydra speakers (8) simultaneously.
4. Double press the TWS Pair button (3) simultaneously on each Hydra device to activate the TWS pairing function on both units.
5. The Hydra speakers will both call out 'Left Channel' & 'Right Channel' to indicate the pairing sequence is complete so you can quickly determine which speaker is for which side.
6. Follow the BT pairing steps 1-4 to pair with your device.
7. Normal operation can now commence in true stereo sound!

Volume Up & Down

1. Locate Volume Up/Skip Forward or Volume Down/Skip Back button (2 or 7) on the top of the Hydra speaker.
2. Press your preferred button as many times as needed to either increase or decrease the Hydra speaker volume to the setting you desire.

Skip Forward & Back

1. Locate Volume Up/Skip Forward or Volume Down/Skip Back button (2 or 7) on the top of the Hydra speaker.
2. Long press your preferred button to either skip forward or back to the next tune.

Taking an Incoming Call

1. Locate 'Play/Pause' button (5) on the top of the Hydra speaker.
2. Press the 'Play/Pause' button (5) once.

Rejecting an Incoming Call

1. Locate 'Play/Pause' button (5) on the top of the Hydra speaker.
2. Long press the 'Play/Pause' button (5) until the call is dismissed on your paired device.



SPECIFICATIONS

Item/Model Number:	3S-1592 / 3S-1593 / 3S-1594
Input:	5V / 1A
Output:	3S-1592 = 5W / 3S-1593 = 10W / 3S-1594 = 20W
BT Version:	5.0
BT Range:	10m
Ingress Rating:	IPX5
Impedance:	4Ω
SNR:	>83dB
Battery Capacity:	3S-1592 = 1500mAh / 3S-1593 = 3000mAh / 3S-1594 = 4400mAh
Recharge Time:	3S-1592 = 2hrs / 3S-1593 = 3hrs / 3S-1594 = 4hrs
Play Time:	3S-1592 = 3-4hrs / 3S-1593 = 5-6hrs / 3S-1594 = 7-8hrs
Operating Temperature:	0 °C - +40 °C
Materials:	ABS/Fabric/Silicone
Product Dimensions (H*W*D):	3S-1592 = 9.5*8.5*8.5cm / 3S-1593 = 16.5*8.5*8.5cm / 3S-1594 = 22.8*11*11cm
Product Weight:	3S-1592 = 275g / 3S-1593 = 420g / 3S-1594 = 840g

