

## SPECIFICATION SHEET

JOB NAME:

LOCATION:

QUOTE/REF#:



## DESCRIPTION

12V DC LED Pre-Wired Constant Voltage Drivers are generally used when you need stable voltage to your LED lights. It has built-in overload, short circuit, and overheat protection. They are energy efficient and ideal for powering our 12V or 24V DC LED lighting.

Need help with your LED lighting applications? Our lighting experts are here to help! Contact us today for assistance with lighting plan or installation instructions.

## SPECIFICATIONS

<b>Input:</b>	100-240V AC
<b>Output:</b>	12V DC or 24V DC
<b>Power:</b>	60, 100, or 120 Watts (12V DC) 60 or 100 Watts (24V DC)
<b>Dimmable:</b>	No
<b>Class II:</b>	Yes
<b>Power Method:</b>	Plug N Play
<b>Finish:</b>	Black Polycarbonate
<b>Environment:</b>	Dry Location
<b>IP Rating:</b>	IP20
<b>Rating:</b>	UL Listed, CUL Listed, RoHS, CE
<b>Manufacturer:</b>	Elumalight
<b>Warranty:</b>	1 Year Limited

## KEY FEATURES

- Easy installation - Plug N Play
- Maintenance-free Class 2 drivers
- Solid-state construction
- High vibration and shock resistance
- Overload, short circuit, and overheat protection
- No RF interference
- Comes with 6 ft length output power cable
- Output Male DC barrel plug is 2.5 mm
- UL Listed power supply
- Long lifespan

## APPLICATIONS


- For use with compatible Constant Voltage 12V DC or 24V DC LED lighting. Not for use with dimmers.

Order SKUs	Voltage	Wattage	Dimensions	Dimensions (metric)
EL-PNP-60W-12V	12V DC	60 Watts	4.45 in. L x 2 in. W x 1.25 in. H	113 mm L x 51 mm W x 32 mm H
EL-PNP-100W-12V	12V DC	100 Watts	5.5 in. L x 2.31 in. W x 1.25 in. H	140 mm L x 58 mm W x 32 mm H
EL-PNP-120W-12V	12V DC	120 Watts	6.7 in. L x 2.76 in. W x 1.57 in. H	170 mm L x 70 mm W x 40 mm H
EL-PNP-60W-24V	24V DC	60 Watts	4.45 in. L x 2 in. W x 1.25 in. H	113 mm L x 51 mm W x 32 mm H
EL-PNP-100W-24V	24V DC	100 Watts	5.5 in. L x 2.31 in. W x 1.25 in. H	140 mm L x 58 mm W x 32 mm H




### SPECIFICATION SHEET

#### 60 Watt Drivers Dimensions

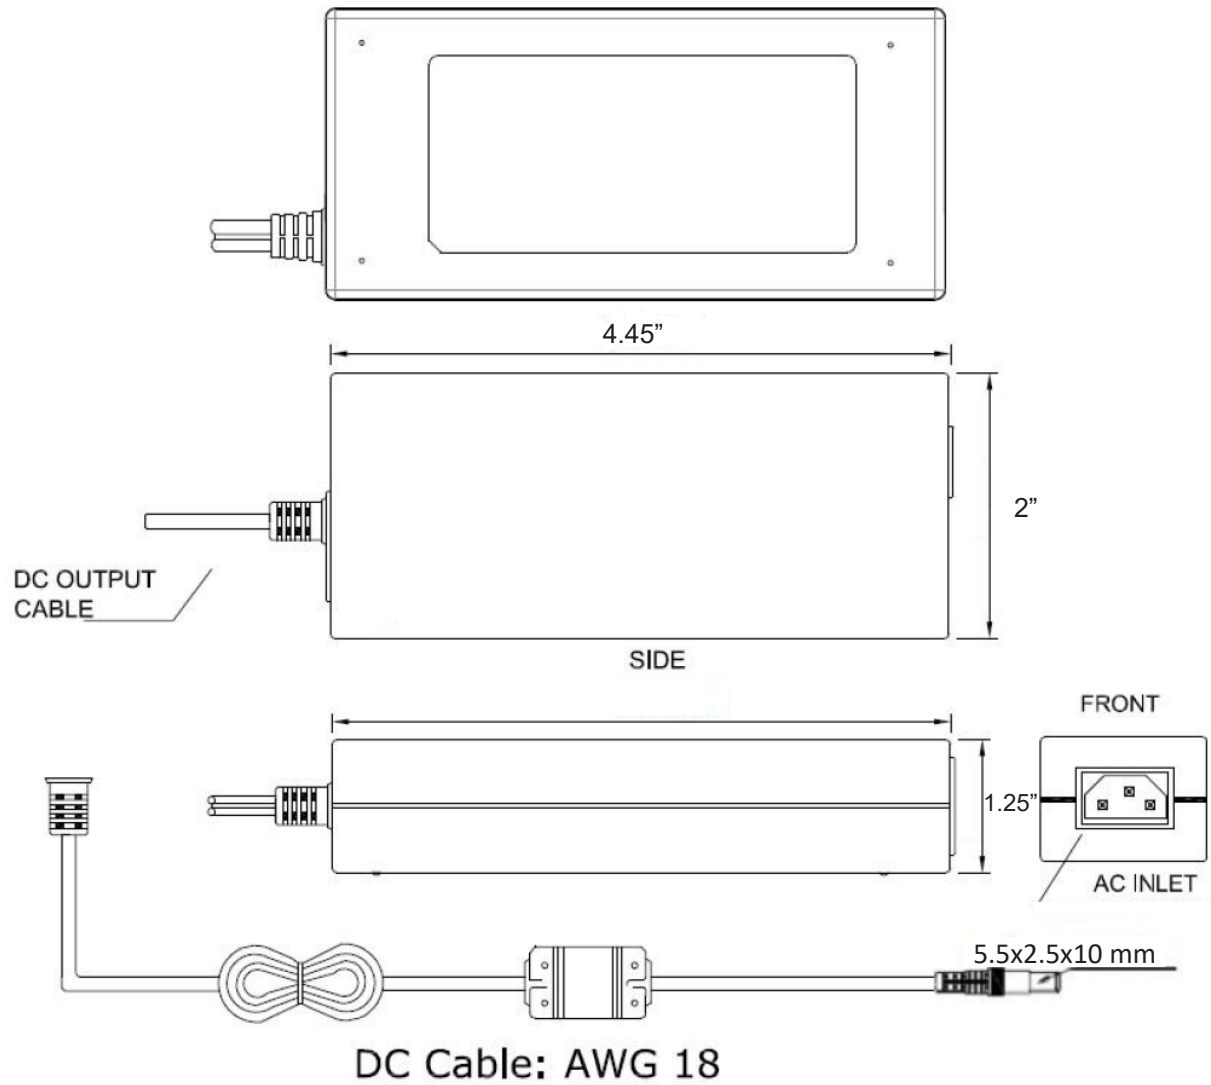

### SPECIFICATION SHEET

#### 100 Watt Drivers Dimensions

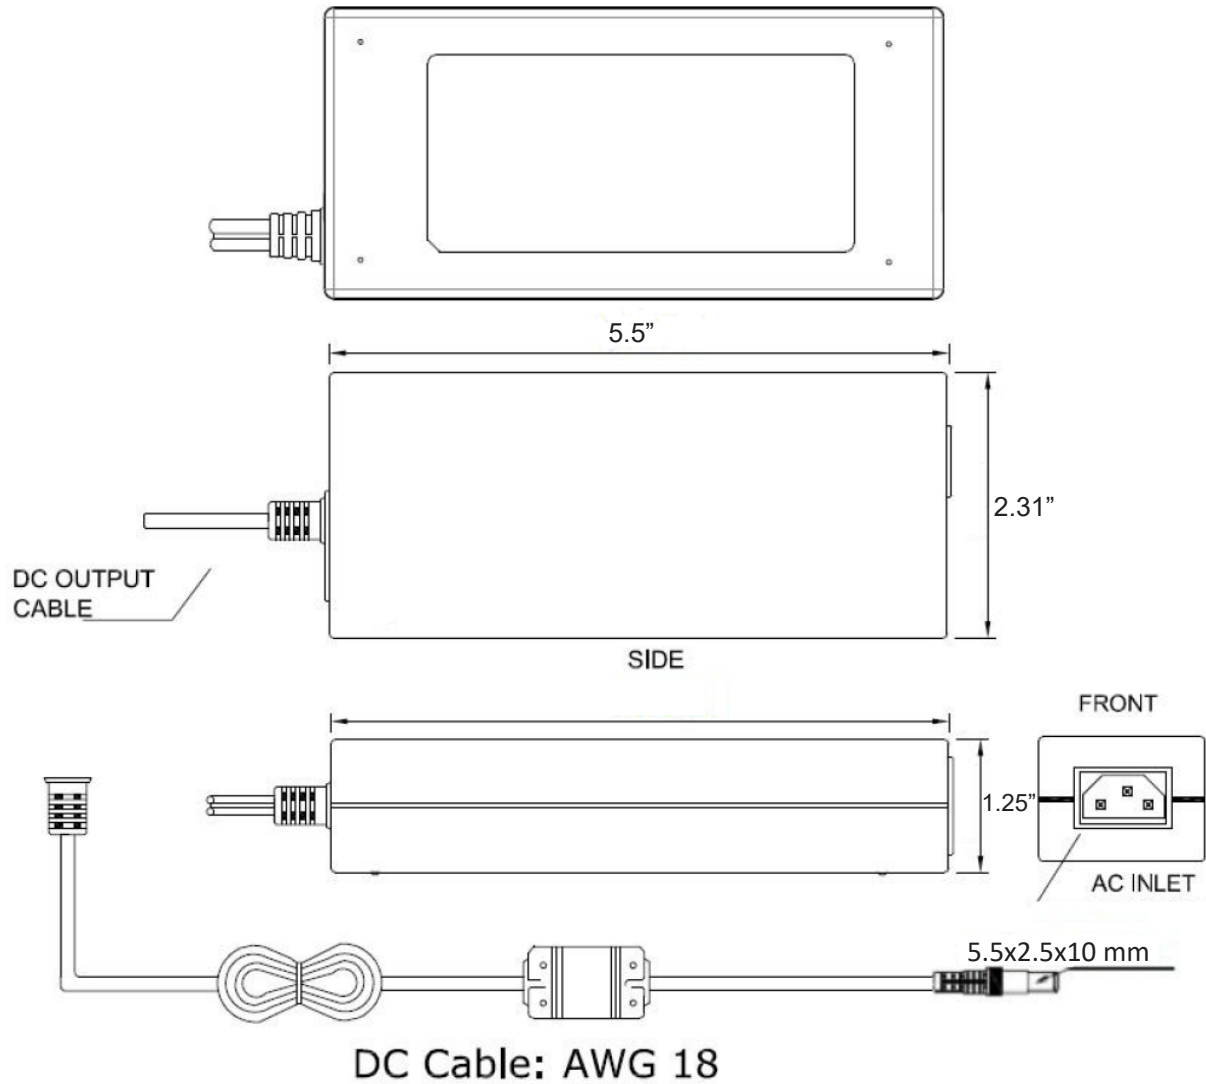

### SPECIFICATION SHEET

#### 120 Watt Drivers Dimensions

