



# SLXTREME 7

Case for iPhone 7

USER GUIDE

# Important Product Instructions

Please take a few moments to read through this user guide prior to using this product. This product is only made to be used with the Apple iPhone 7.

- **Remove your protective screen film before use.**
- Do not attempt to disassemble product or repair any part of this battery.
- Do not place this product near an open flame or expose to excessive heat.
- Do not crush or puncture the battery.
- Keep away from high voltage devices.
- Recharge battery every three months when not in use.
- Use soft cloth to clean exterior. Do not use harsh chemicals or strong cleaning solvents.
- Dispose of this product properly and in accordance with local disposal regulations.

***Disclaimer:*** Final product may differ from artwork without notice.

# Package Contents



1 – SLXtreme 7 case for Apple iPhone 7




1 – Micro USB Cable




1 – Gasket

# Package Contents (Continued)

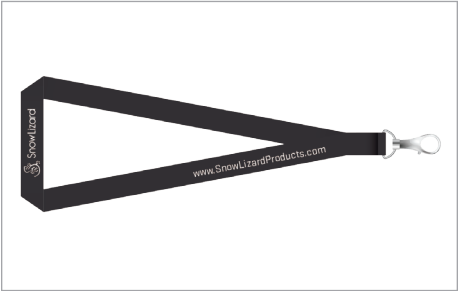

1 – Break-away clip and Lanyard

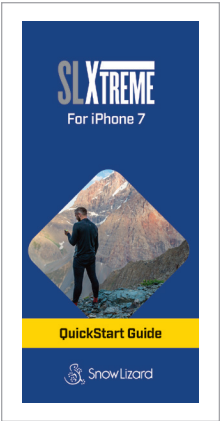

1 – Quickstart guide



1 – Drybox

# Product Specification

<b>Name</b>	SLXtreme 7
<b>Cell Type</b>	Lithium Ion Polymer
<b>Solar Panel</b>	Mono-crystalline
<b>Input</b>	DC 5V – 1 AMPS
<b>Output</b>	DC 5V – 1.4 AMPS
<b>Capacity</b>	4,000 mAh
<b>Dimensions</b>	6.56" x 3.35" x 1"
<b>Weight</b>	7.5 oz. / 212.6 g
<b>Compatibility</b>	Apple iPhone 7
<b>Added Talk Time</b>	Additional 16 hours*
<b>App Time</b>	12 hours*


\*Additional times are the hours added to the iPhone 7's battery by the battery of the SLXtreme 7.

# Key Features



1. Volume buttons and Ringer Knob
2. Phone's on/off button
3. Quick Latch
4. Speakers
5. Audio Enhancement Port
6. Micro USB Cover

## Key Features (Continued)

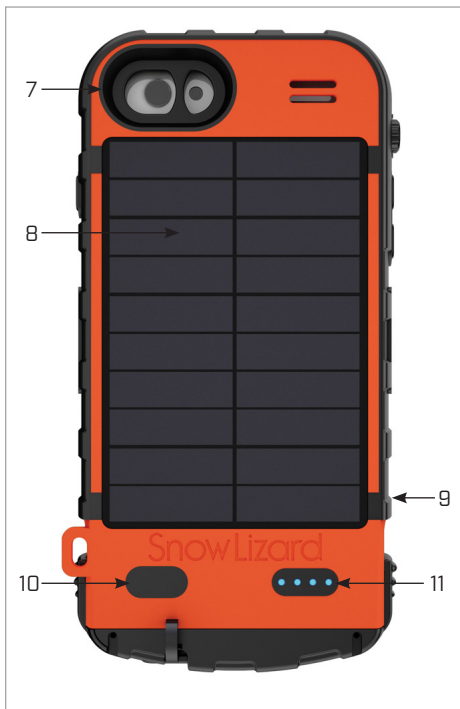

7. Camera Lens Protector

8. Solar panel

9. Latch


10. Battery Power Button

11. LED Indicator Lights

# Getting Started

The SLXtreme 7 is partially charged from the factory and can be used right out of the package. For best results it is recommended that you fully charge the case's internal battery before use.


1. To access the micro USB charge port, peel back the cover. See below.
2. Insert the micro USB end of the included cable into the case's micro USB charge port and then connect the USB end into the USB port on your computer or other USB enabled power source.
3. The SLXtreme 7 case will automatically turn on and the LEDs will indicate the current charge level and charging status.

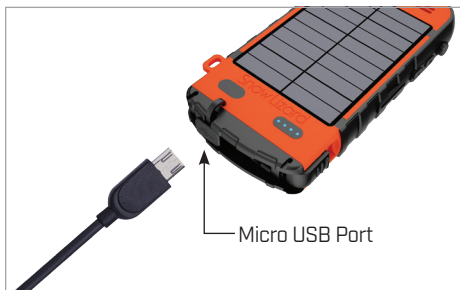

**Note:** If you are charging the SLXtreme case with the iPhone in the case, the iPhone will charge to 100% before the case will be charged.



# Checking Battery Charge

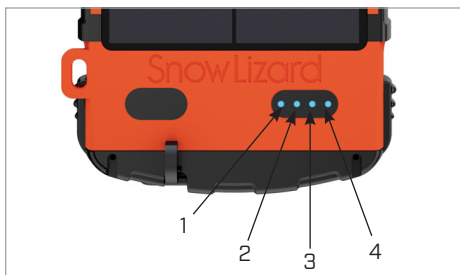

Press the battery button to check the remaining charge of the SLXtreme's battery.

- LED 1 steady blue = 0–25%
- LED 1 & 2 steady blue = 26–50%
- LED 1, 2 & 3 steady blue = 51–75%
- LED 1, 2, 3 & 4 steady blue = 76–100%

## Starting and Stopping Charge Cycle

1. Pressing the battery button once will begin the charge cycle in addition to indicating the charge level by the LEDs. The phone will also indicate that it is charging.
2. Pressing the battery power button twice will stop the charging cycle. The phone will then indicate it is no longer charging.

**Note:** While SLXtreme is actively charging the phone, the solar panel will not charge the case battery.

## Testing Waterproof Ability Before Use

Your SLXtreme 7 case is IP-68 rated and is designed for submerging in water down to 2 meters (6.6') for up to 30 minutes.

Before using your SLXtreme 7 for the first time, test the case by placing a paper towel in the case and close and latch the bottom cover (instructions on following page.)

When closing the case, keep the bottom cover seal free from debris and sand to prevent any leakage. Be sure to check that the audio jack plug is tightened and not loose.

Submerge the case 0.3 m (1') underwater for 30 minutes to ensure the case is not leaking or defective. We recommend doing this a few times a year and after major drops to ensure the case's integrity and waterproof ability remain intact.

## LED Behavior while Charging

The LEDs will indicate charging progress while your SLXtreme is plugged into a power source.

When the battery has reached a full charge, the LEDs will stop blinking.

- LED 1 steady blue = 0-25%
- LED 1 & 2 steady blue = 26-50%
- LED 1, 2 & 3 steady blue = 51-75%
- LED 1, 2, 3 & 4 steady blue = 76-100%

# Inserting iPhone 7 into SLXtreme Case

**Important:** remove any case or accessory that may be on or connected to your iPhone 7, including polyurethane and protective screen films.

These protective films can cause the phone to become stuck in the case and difficult to remove from the case.

1. Open the bottom cover of the SLXtreme 7 by unclasping the latches. Slide the iPhone 7 top first through the bottom of the case.
2. Be sure to check the gasket area of the case is free of debris before putting the bottom cover back on.
3. Insert the bottom cover onto the bottom of the case ensuring that it's oriented properly so the lightning connector mates with the phone.
4. Secure the latches back onto the cover.

**Note:** When removing the phone from the case, unlatch the cover, orient the case upright and slowly pull the cover from the case. The phone will slide out with the cover since it's connected to the lightning connector.

# Taking Images and Video Underwater

1. The SLXtreme is meant for water sports enthusiasts, adventurers and extreme outdoorsmen. While the touch screen is not responsive underwater, you can still capture photos and video with your iPhone 7.
2. Use the volume / shutter button to snap photos in and out of water or to begin/end recording video. Wipe any moisture away to use the screen again or to switch modes once out of water.
3. When you come up for air, instantly post and share your images and videos on your social sites. Don't forget to tag us in your photos and videos online!
4. Twitter/Instagram: @SnowLizard\_Gear  
Facebook: @SnowLizardProducts
5. Hashtag: #SLXtreme

## Trickle Charging with the Built-in Solar Panel

The LED indicator will show the strength of the power it is receiving with green indicator lights. 3 green lights means the solar panel is optimally positioned.



For every hour of sunlight, the SLXtreme 7's power is replenished enough to provide approximately 10 minutes of talk time. This is useful when you are away from a power source.

**Note:** Solar charge replenishment may vary depending on a number of variables. The solar panel trickle charges the SLXtreme case. The solar panel will not charge the battery while the case is actively charging the phone.

For added security, Snow Lizard recommends using the Break-away clip and lanyard included with the SLXtreme. A break away style lanyard is also provided.

# One Year Limited Warranty

SnowLizard™ provides a 1 year limited warranty. Warranty only covers Snow Lizard products and does not warranty any non-Snow Lizard products or devices.

## **Please visit:**

[www.snowlizardproducts.com](http://www.snowlizardproducts.com)  
for our full warranty and more information.

## **Support**

For any support regarding your Snow Lizard product, please contact us at:

## **Customer Service:**

1 (855) 759-0771  
[support@snowlizardproducts.com](mailto:support@snowlizardproducts.com)  
[www.snowlizard.com](http://www.snowlizard.com)

“Made for iPhone” means that an electronic accessory has been designed to connect specifically to iPhone respectively, and has been certified by the developer to meet Apple performance standards. Apple is not responsible for the operation of this device or its compliance with safety and regulatory standards. Please note that the use of this accessory with iPhone may affect wireless performance.

iPhone® is a registered trademark of Apple, Inc.  
SnowLizard™ is a trademark of Snow Lizard Products, LLC.

© 2017 SNOW LIZARD PRODUCTS LLC.



Snow Lizard

**SNOWLIZARD.COM**

© 2017 Snow Lizard Products, LLC.

iPhone

Designed by Apple in California. Assembled in China.  
Model A1660 FCC ID: BCG-E3085A IC: 579C-E3085A